

**CERAMIC TRAP (3pins type)**
**FEATURES:**

- THREE-TERMINAL TYPE
- 3.58 / 4.43 / 4.5 / 5.5 / 5.742/ 6.0 / 6.5 MHz ARE AVAILABLE


**► MB Series**

PART NUMBER	NOMINAL CENTER FREQUENCY (fn)	TRAP ATTENUATION AT fn (dB) MIN.	30dB ATTENUATION BAND WIDTH (KHz) MIN.
XT 3.58 MB	3.58 MHz	25 (40)	40 (70)
XT 4.43 MB	4.43 MHz	25 (40)	40 (70)
XT 4.5 MB	4.5 MHz	35 (45)	50 (80)
XT 5.5 MB	5.5 MHz	35 (45)	70 (120)
XT 5.74 MB	5.742 MHz	35 (45)	70 (120)
XT 6.0 MB	6.0 MHz	35 (45)	70 (120)
XT 6.5 MB	6.5 MHz	35 (45)	70 (120)

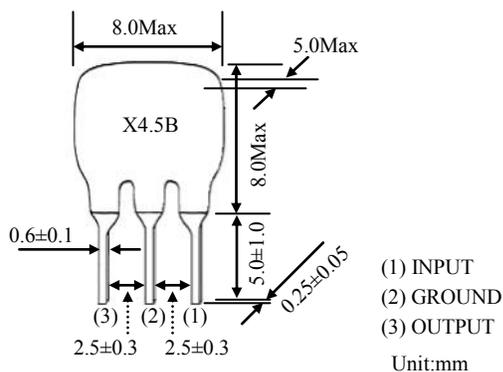
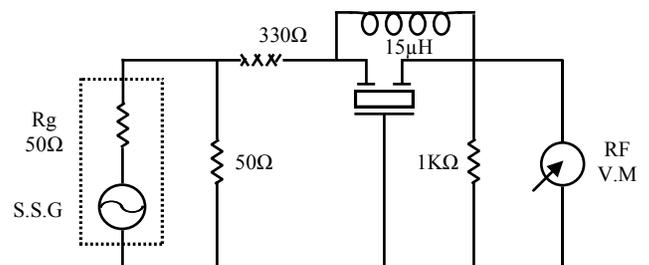
The level at 1MHz shall be made for a reference (0 dB)

( ) : Type. Values

**► MW Series (Double Trap)**

PART NUMBER	CENTER FREQUENCY (fn1) (MHz)	CENTER FREQUENCY (fn2) (MHz)	ATTENUATION (at fn1) (dB) MIN.	ATTENUATION (at fn2) (dB) MIN.	30dB ATTENUATION BAND WIDTH (fn1) (KHz) MIN.
XT 4.47MW	4.500	4.724	30	30	50
XT 4.60 MW	4.500	6.000	30	30	50
XT 5.57 MW	5.500	5.742	30	30	50
XT 5.6 MW	5.500	6.000	30	30	50
XT 5.65 MW	5.500	6.500	30	30	50
XT 6.65 MW	6.000	6.500	30	30	70

The level at 1MHz shall be made for a reference (0 dB)

**■ PACKAGE DIMENSIONS**

**■ TEST CIRCUIT**


Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.