

- SAW Duplexer For For 910 MHz / 955 MHz
- Revision 0: January 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	0	-
Maximum Input Power	W	1.0 W > 50,000 Hours, CW tone(Ta= +50°C)		
Input Impedance	Ω	-	50	-
Output Impedance	Ω	-	50	-
Package type & size	P2			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.45

ELECTRICAL SPECIFICATION					
PARAMETERS	CONDITION [MHZ]	UNIT	MINIMUM	TYPICAL	MAXIMUM
Tx → Ant		Specifications			
Insertion Loss	905.0 ~ 915.0	dB	-	1.2	2.5
Amplitude Ripple	905.0 ~ 915.0	dB _{p-p}	-	0.2	1.0
VSWR	905.0 ~ 915.0	-	-	1.2	2.0
Absolute Attenuation	950.0 ~ 960.0	dB	40	50	-
Ant → Rx		Specifications			
Insertion Loss	950.0 ~ 960.0	dB	-	1.3	2.5
Amplitude Imbalance	950.0 ~ 960.0	dB _{p-p}	-	0.3	1.0
VSWR	950.0 ~ 960.0	-	-	1.2	2.0
Absolute Attenuation	905.0 ~ 915.0	dB	45	55	-
Tx → Rx		Specifications			
Isolation	905.0 ~ 915.0	dB	45	55	-
	950.0 ~ 960.0	dB	50	58	-

Notes : (1) With Matching Network .


Package Dimensions

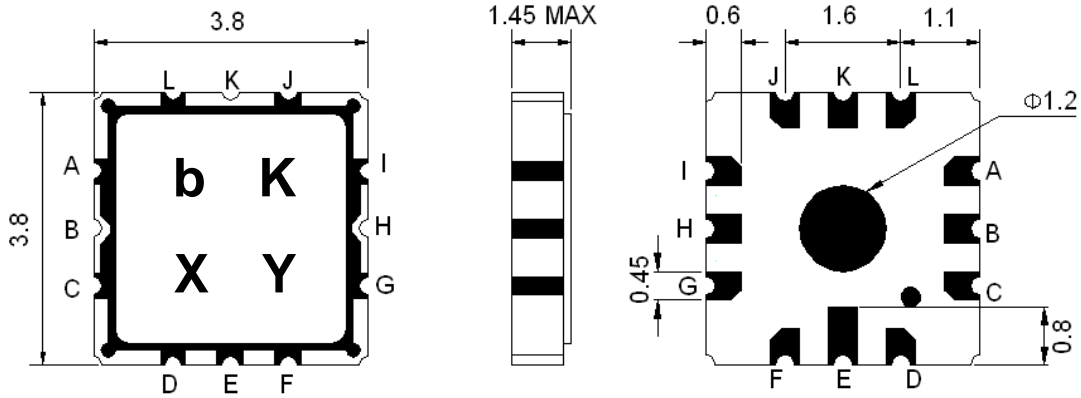

Marking Descriptions	
b	Wireless Application
K	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, E, F, G, I, J, L	Ground
K	Ant
B	Rx (955.0 MHz)
H	Tx (910.0MHz)

Testing Environment

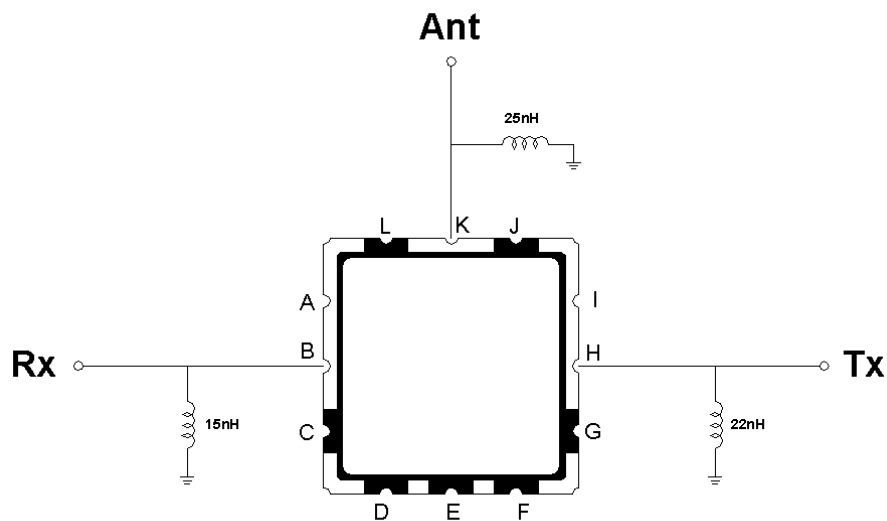


Frequency Characteristics


Tx to Ant

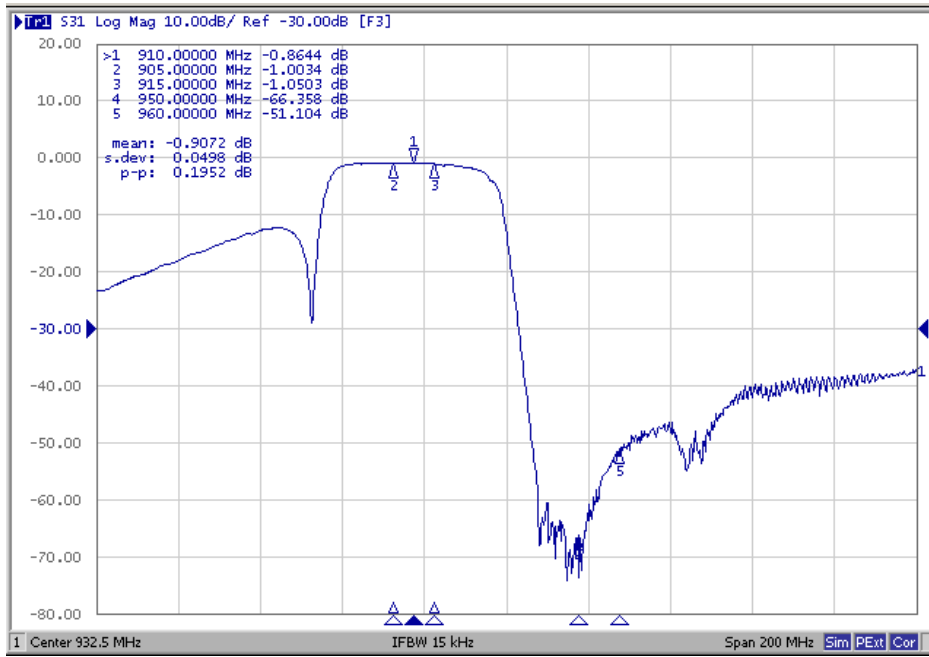

Ant to Rx

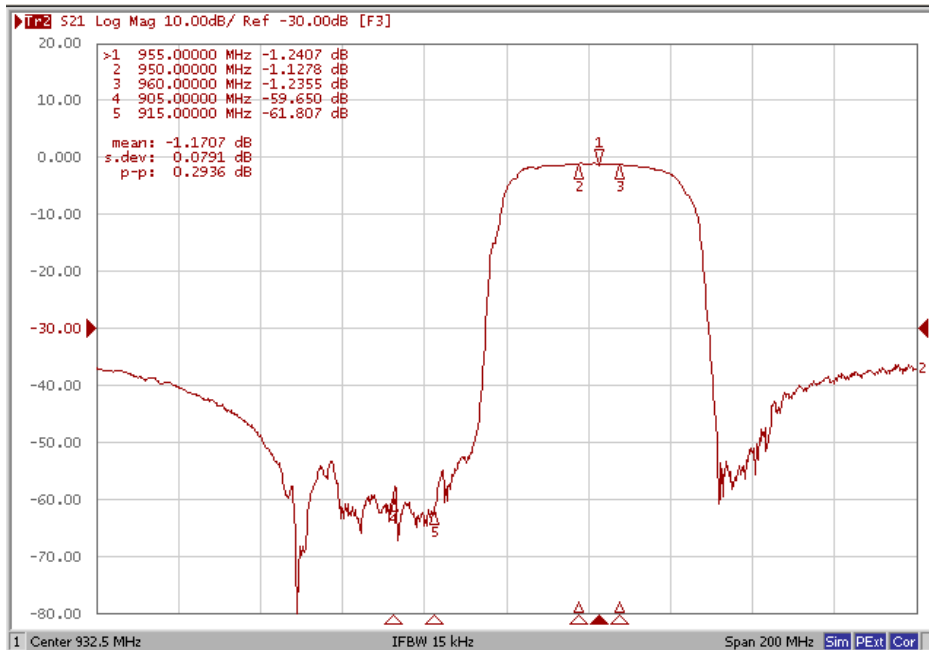


Isolation

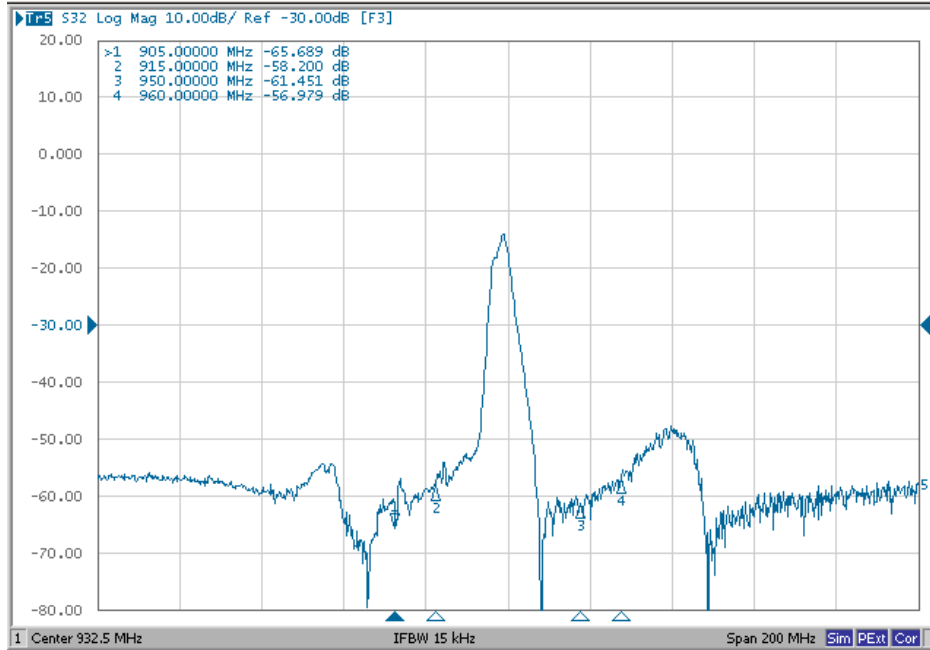


Tx Part

Smith Chart

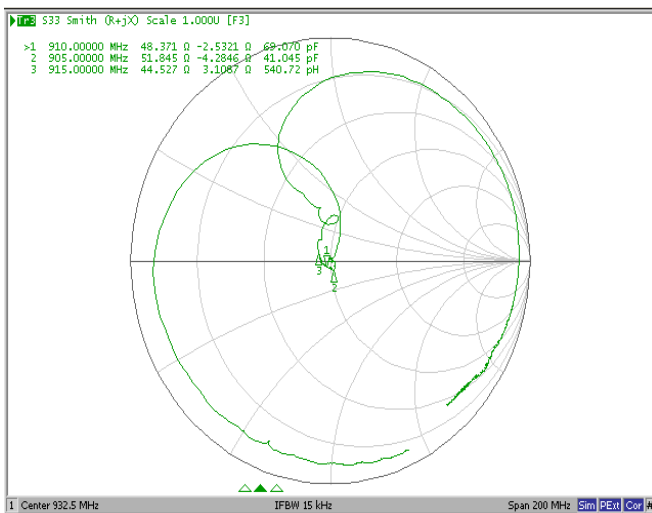


VSWR

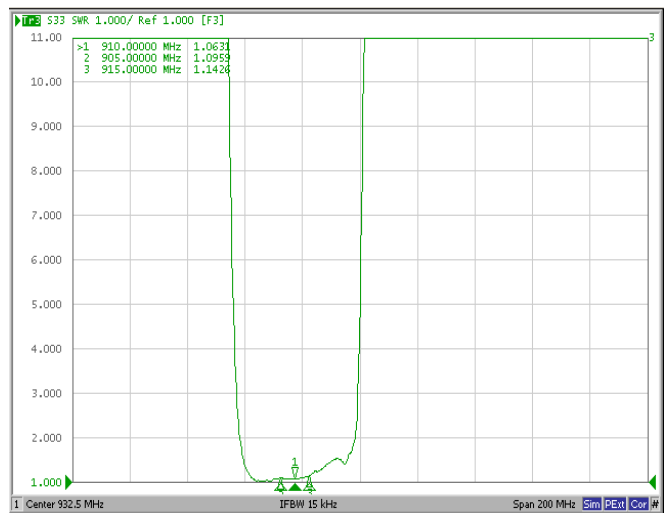


Rx Part

Smith Chart

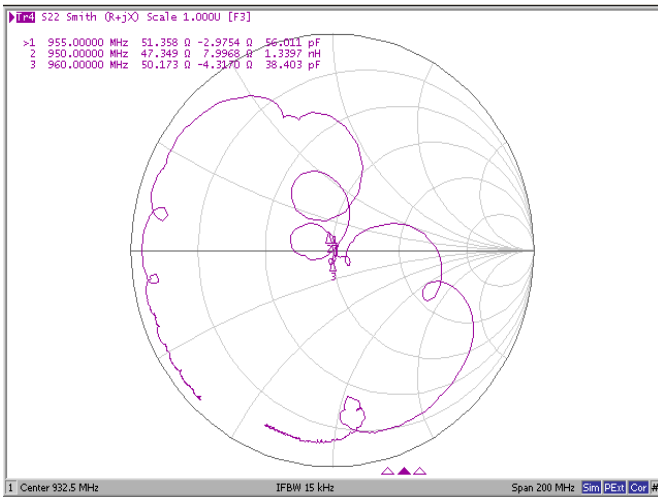


VSWR

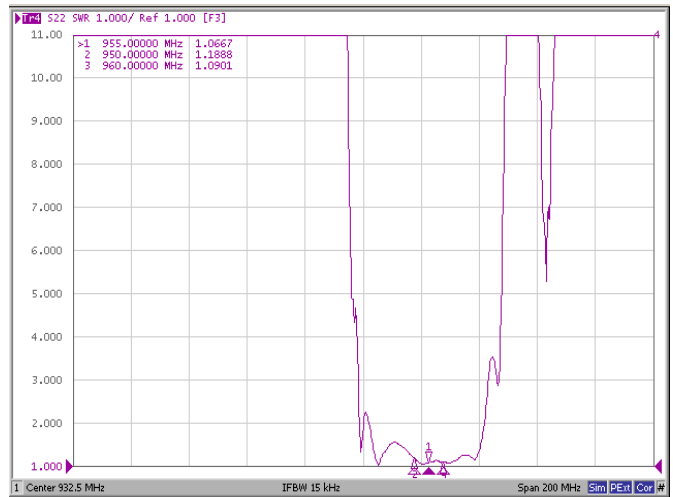

Antenna

Smith Chart

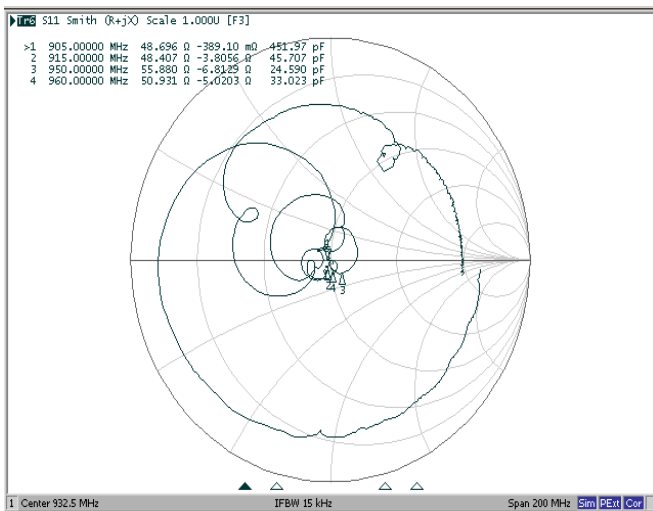

VSWR

