

- 75.00 MHz IF SAW Filter / 14.8 MHz Bandwidth
- Revision 0: 1 Oct. 2008


Electrical Characteristics

MAXIMUM RATING				
Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	T			
Length x Width	mm ²	-	9.1 x 4.8	-
Height	mm	-	-	1.5


ELECTRICAL SPECIFICATION				
Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	75.0	-
Insertion Loss at Fo	dB	-	13.5	15.0
Group Delay Variation at Fo±6.875MHz	nsec	-	30	60
Absolute Delay Time at Fo	usec	-	0.96	-
Passband Ripple at Fo±6.875MHz	dB	-	0.46	0.8
Bandwidth at -1dB	MHz	-	14.8	-
Bandwidth at -3dB	MHz	-	15.67	-
Bandwidth at -40dB	MHz	-	19.85	20.5
Ultimate Rejection	dB	40	47	-
Temperature Coefficient	ppm/°C	-	-86	-
VSWR	-	-	3	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.

Package Dimensions

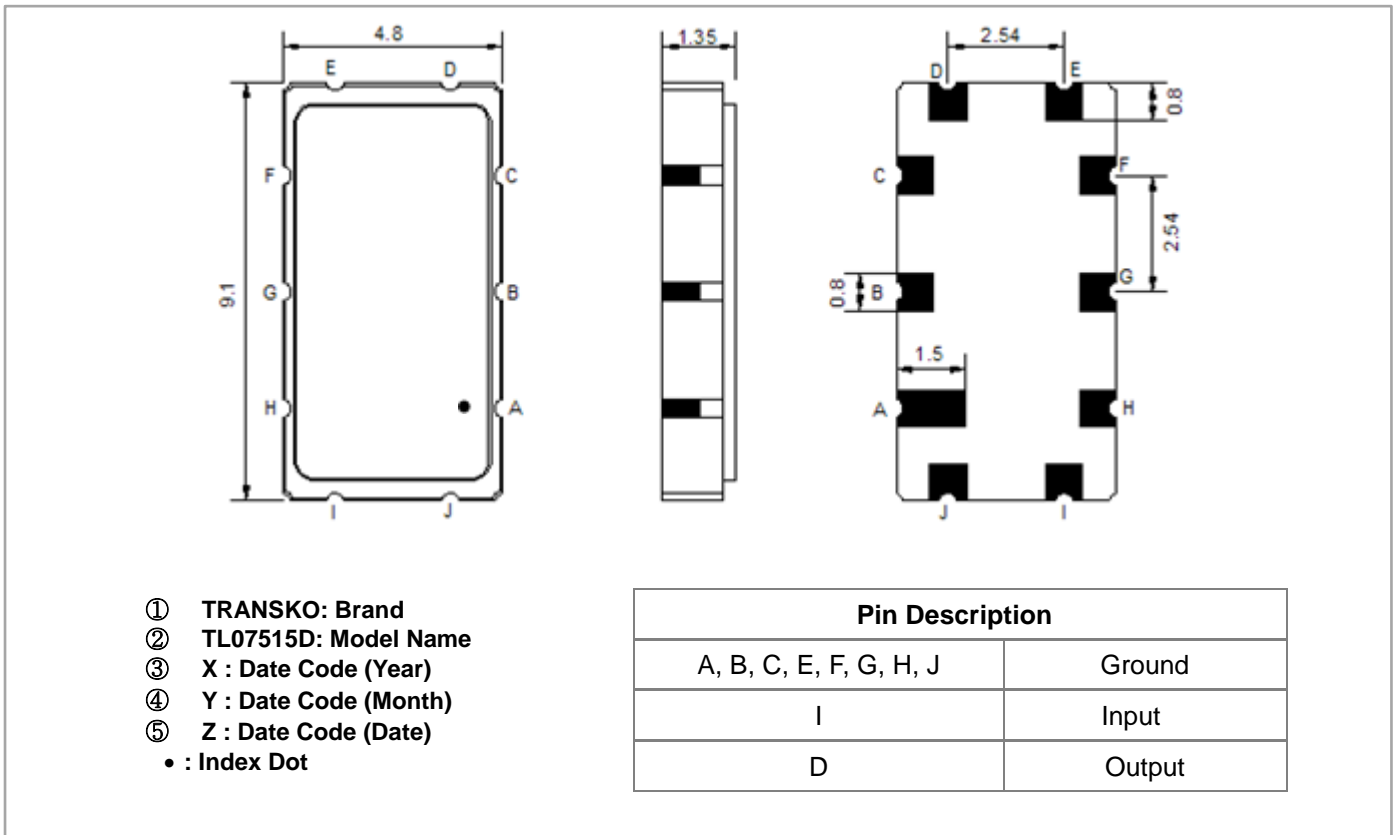


Testing Environment

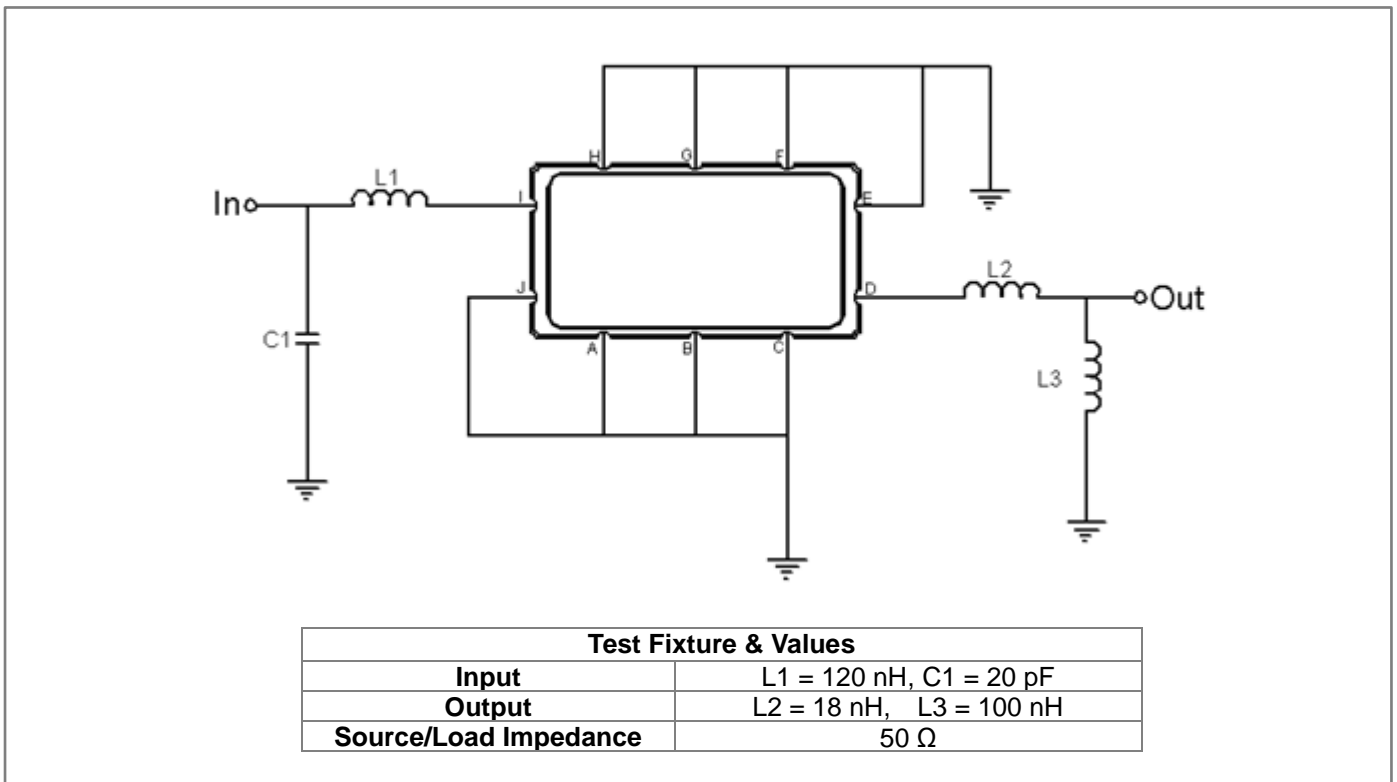


Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

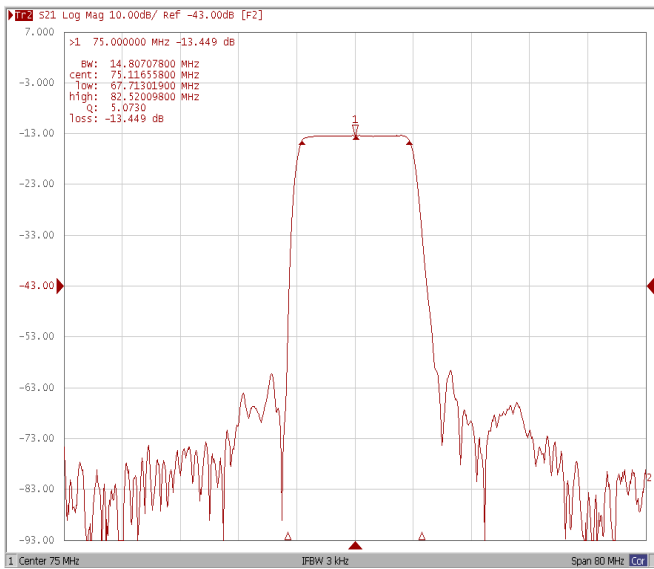


Bandwidth at -3.0 dB

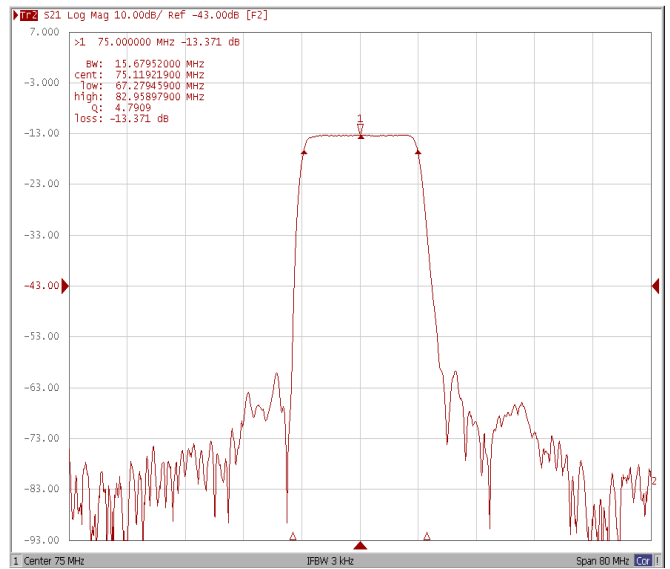

Bandwidth at -30.0 dB

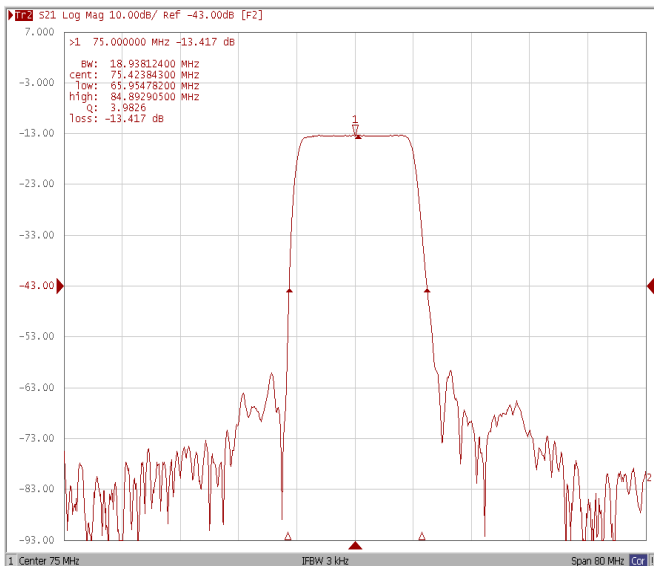


Bandwidth at -40.0 dB

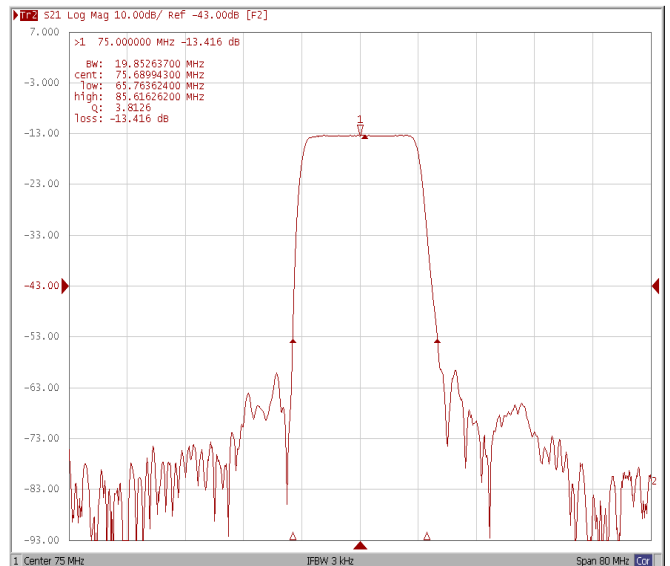


Frequency Response


Ripple Variation Fo±6.875MHz

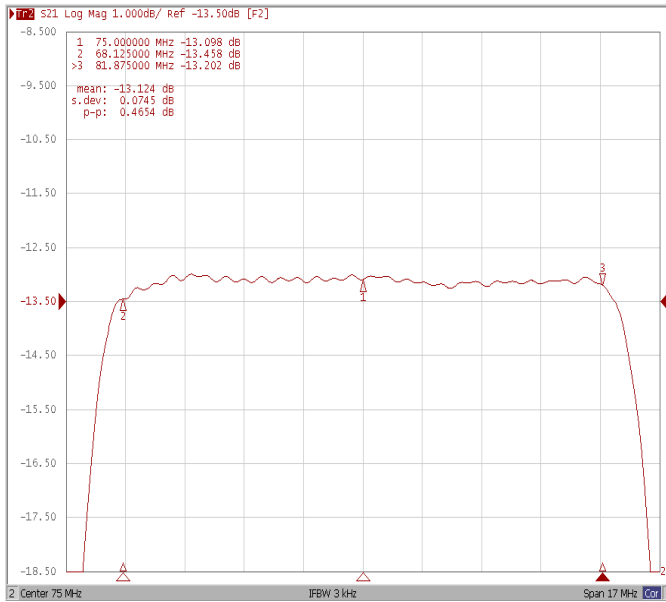

Group Delay Variation Fo±6.875MHz

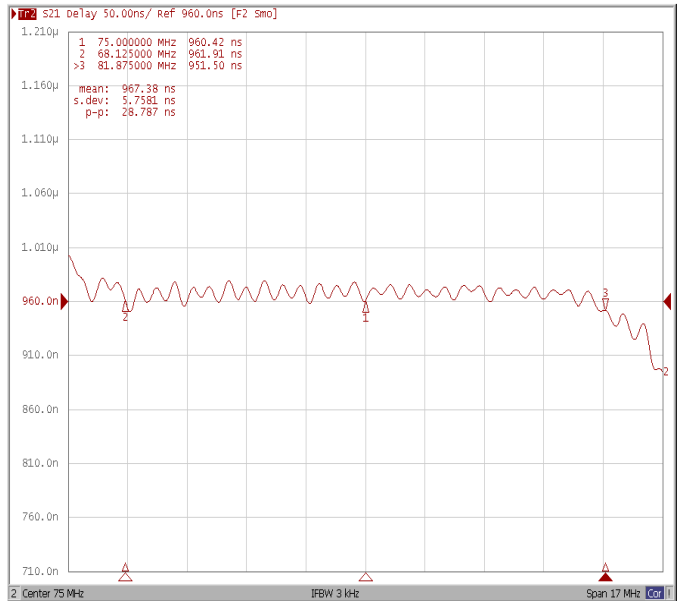

Smith Chart

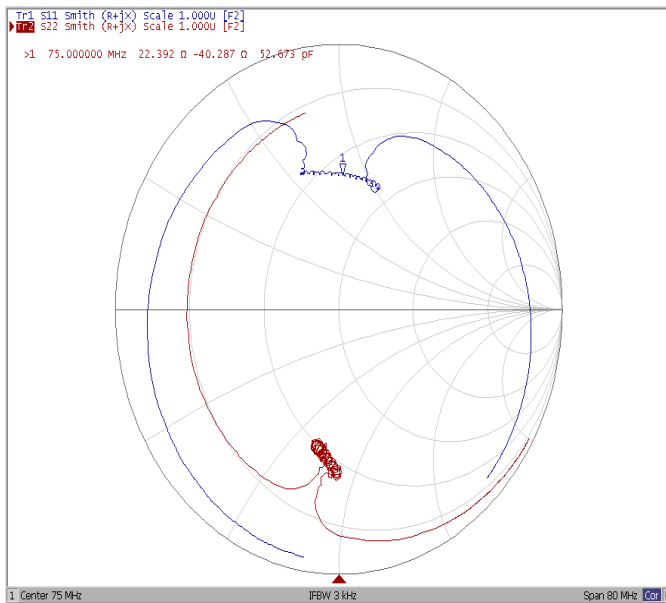

VSWR

