

- 70.0 MHz IF SAW Filter / 14.37 MHz Bandwidth
- Revision 0: 22 May 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	69.92	70.00	70.08
Insertion Loss at Fo	dB	-	23.5	25.0
Group Delay Variation	nsec	-	35	70
Absolute Delay at Fo	usec	-	1.62	-
Passband Ripple Variation	dB	-	0.75	1.0
Bandwidth at -1dB	MHz	-	14.37	-
Bandwidth at -3dB	MHz	14.70	14.82	-
Bandwidth at -40dB	MHz	-	16.82	16.90
Ultimate Rejection	dB	45	50	-
Temperature Coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

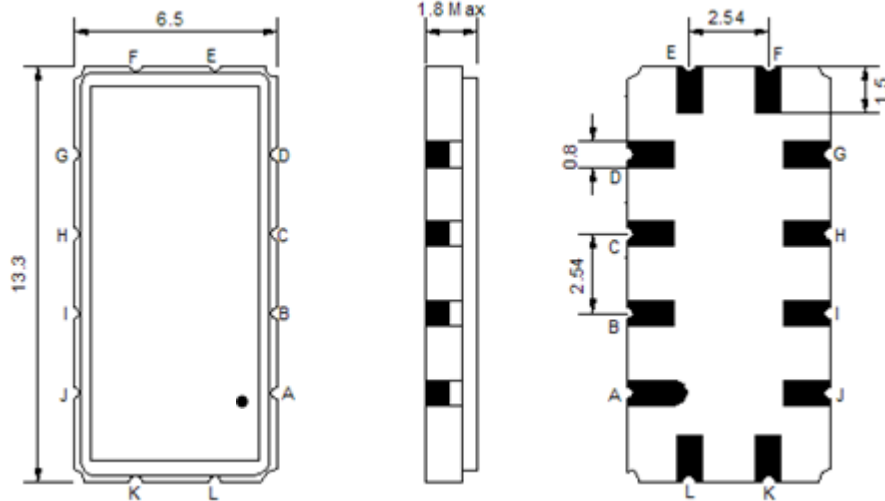

- ① TRANSKO: Brand
- ② TA07014A: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

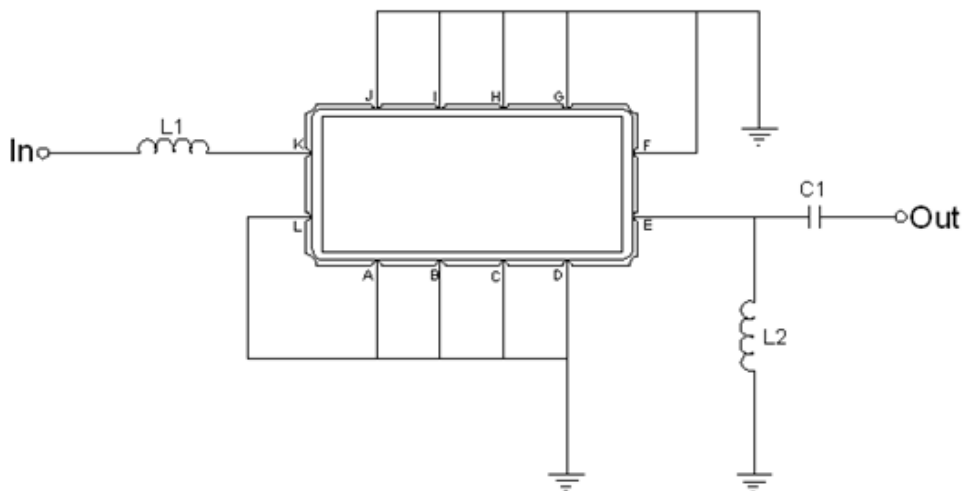



Test Fixture & Values	
Input	L1 = 180 nH
Output	L2 = 220 nH , C1 = 50 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

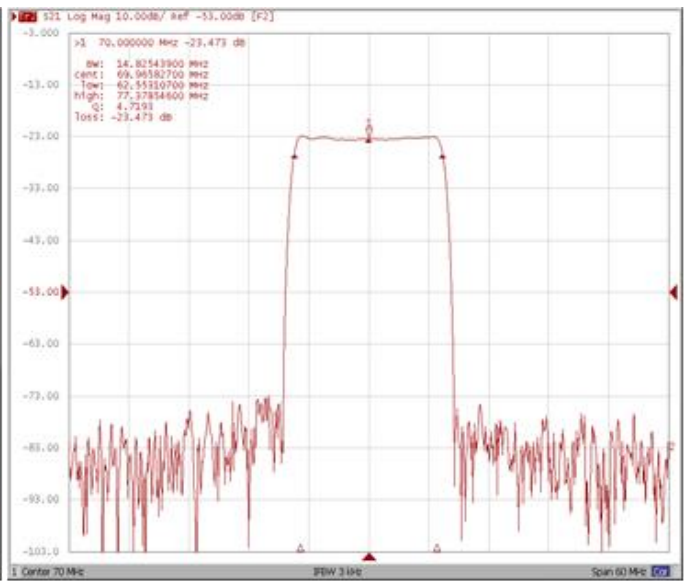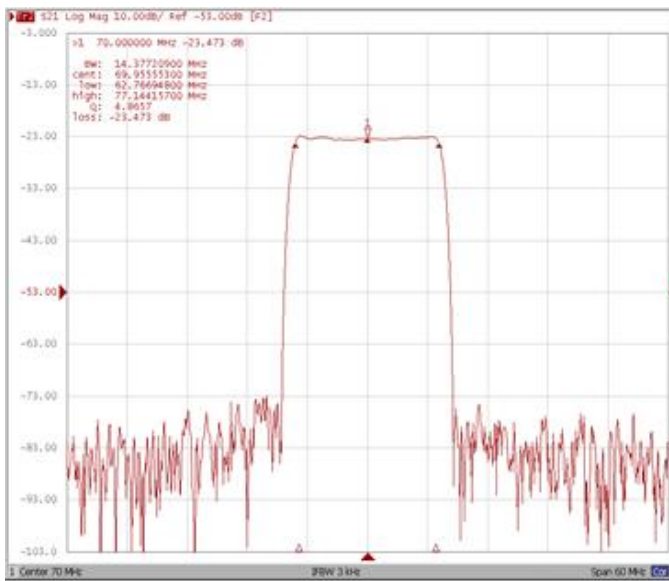


Bandwidth at -40.0 dB

Bandwidth at -50.0 dB

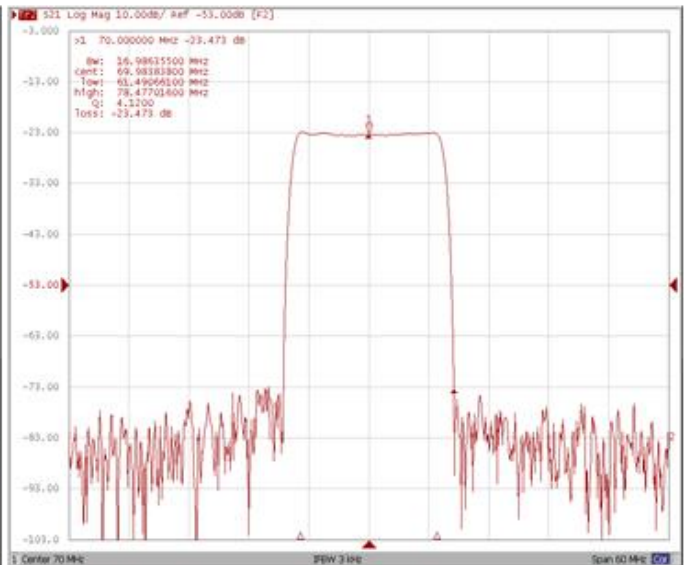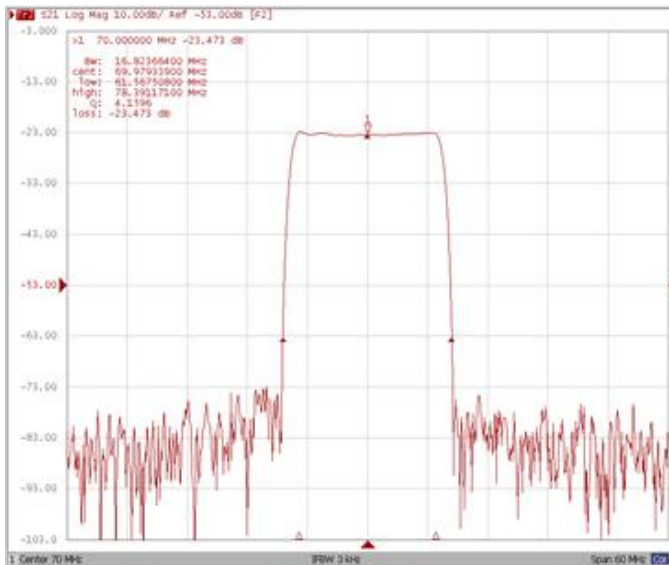


Frequency Response


Ripple Variation Fo±6.8MHz

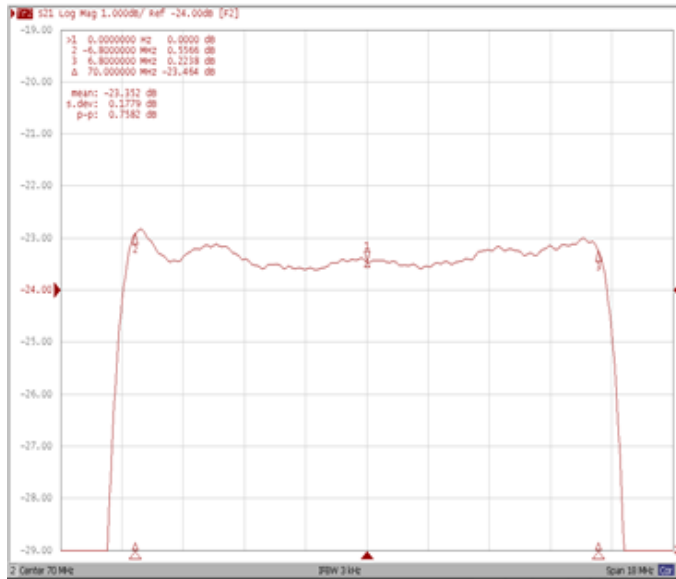

Group Delay Variation Fo±6.8MHz

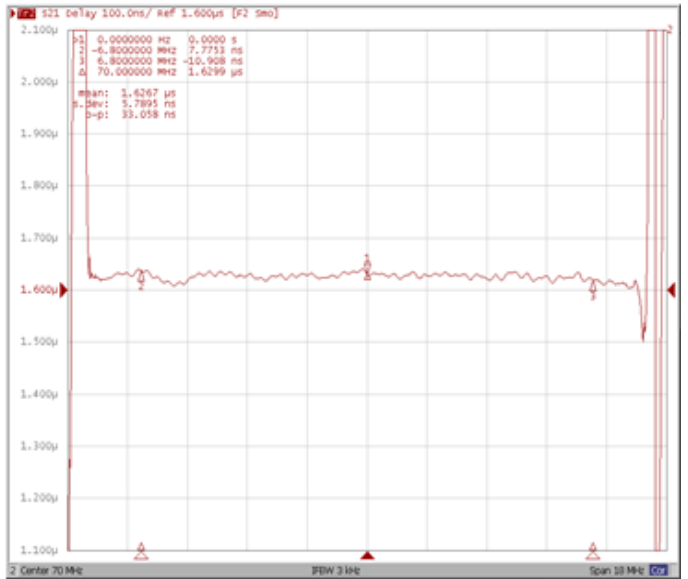

Smith Chart

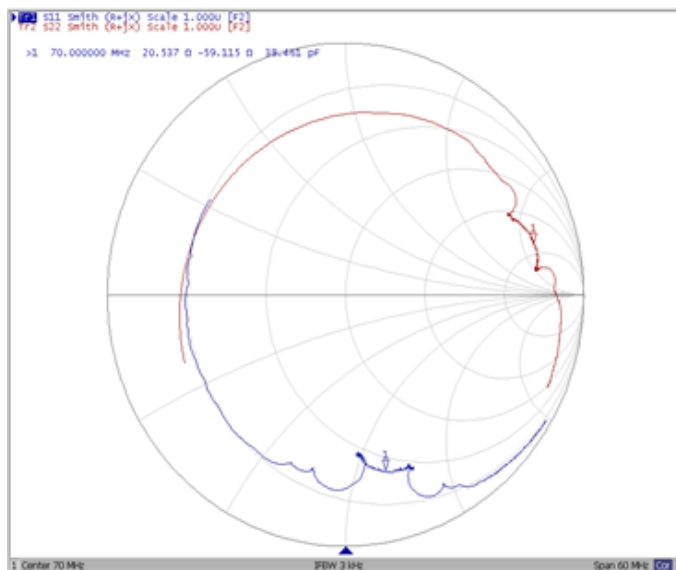

SWR

