

- 79.9 MHz IF SAW Filter / 20.25 MHz Bandwidth
- Revision 0: 25. Jul. 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	79.80	79.90	80.00
Insertion Loss at Fo	dB	-	24.0	25.5
Temperature Coefficient	ppm/°C	-	-72	-
Amplitude Ripple within fo ±9.65 MHz	dB _{p-p}	-	0.55	1.00
Group Delay Variation within fo ±9.65 MHz	nsec	-	25	50
Absolute Delay at Fo	µsec	-	1.60	-
Bandwidth at -1.0 dB	MHz	20.10	20.25	-
Bandwidth at -3.0 dB	MHz	-	20.60	-
Bandwidth at -40.0 dB	MHz	-	22.20	22.40
Ultimate Rejection	dB	45	50	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

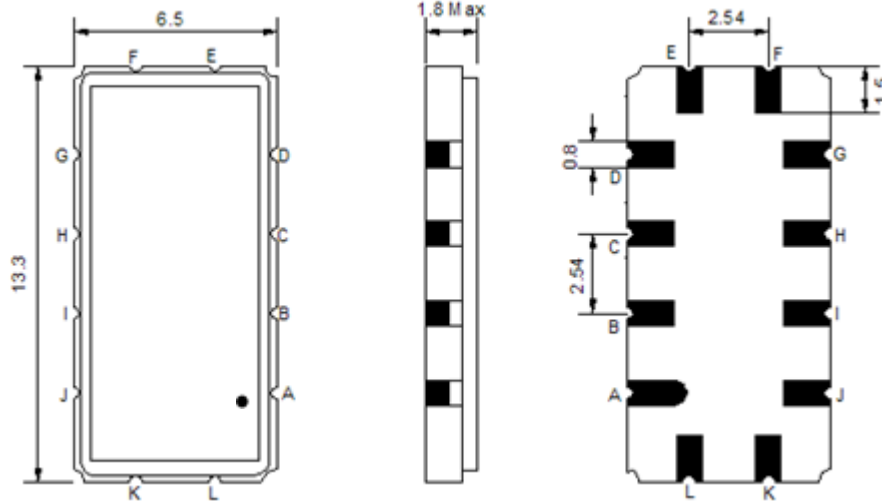

- ① **TRANSKO:** Brand
- ② **TA07920B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

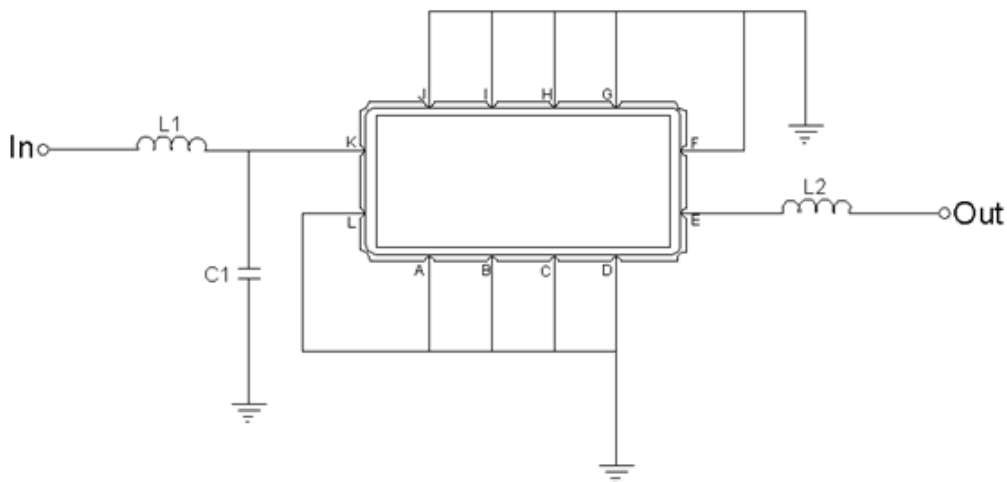



Test Fixture & Values	
Input	L1=150 nH, C1=10 pF
Output	L2=100nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

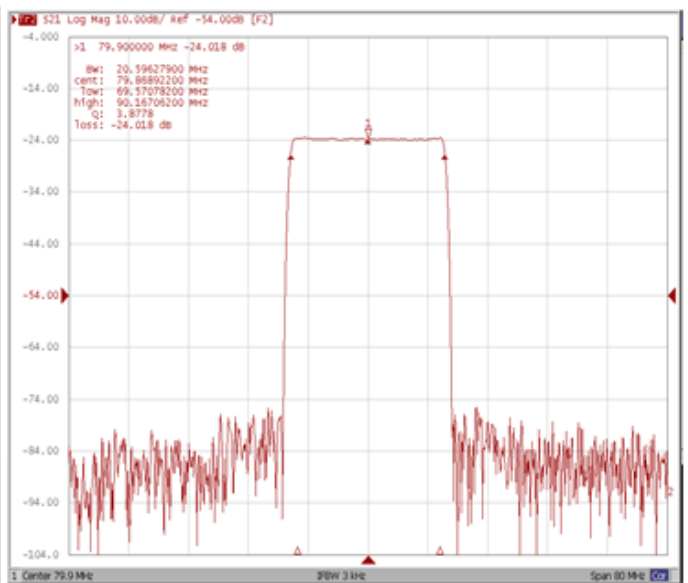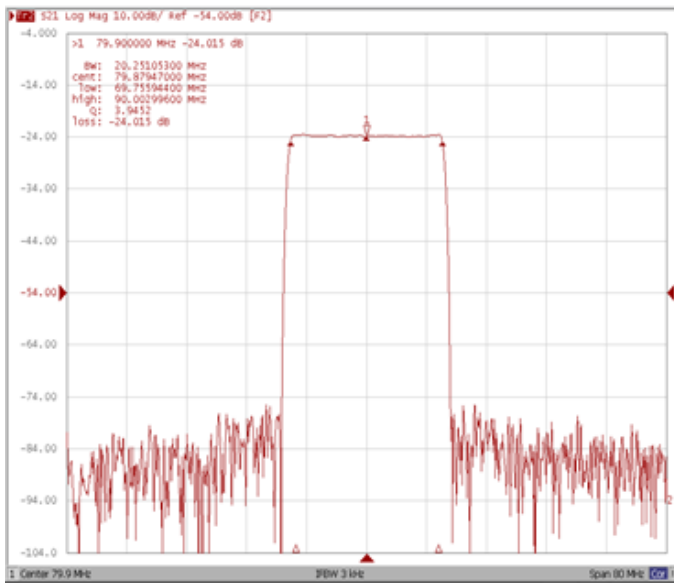


Bandwidth at -40.0 dB

Wide-Band

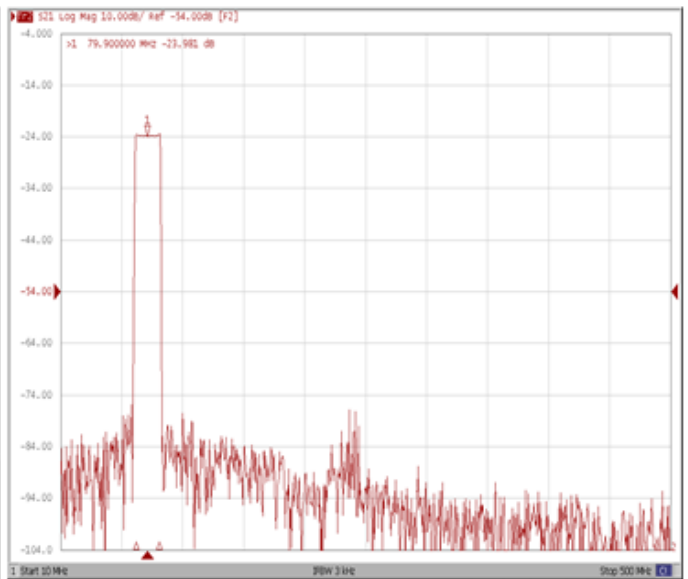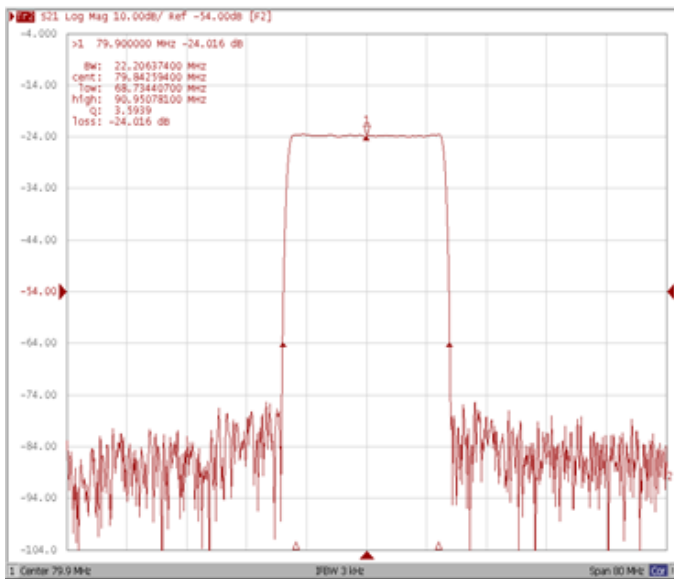


Frequency Response


Ripple Variation Fo±9.65MHz

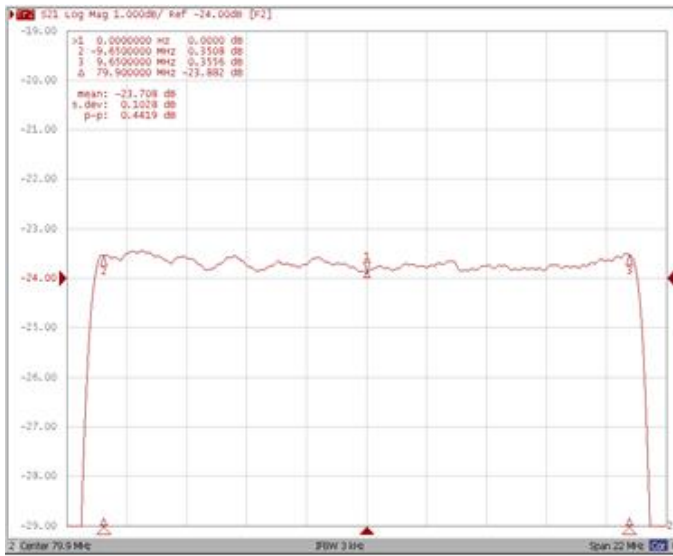

Group Delay Variation Fo±9.65MHz

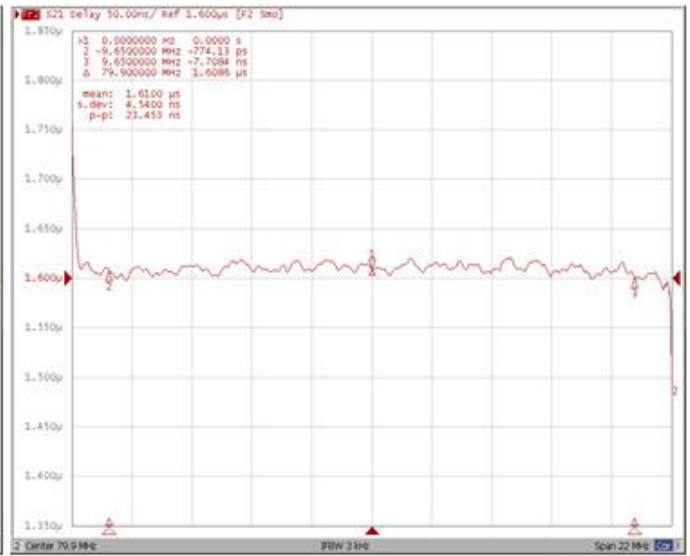

Smith Chart

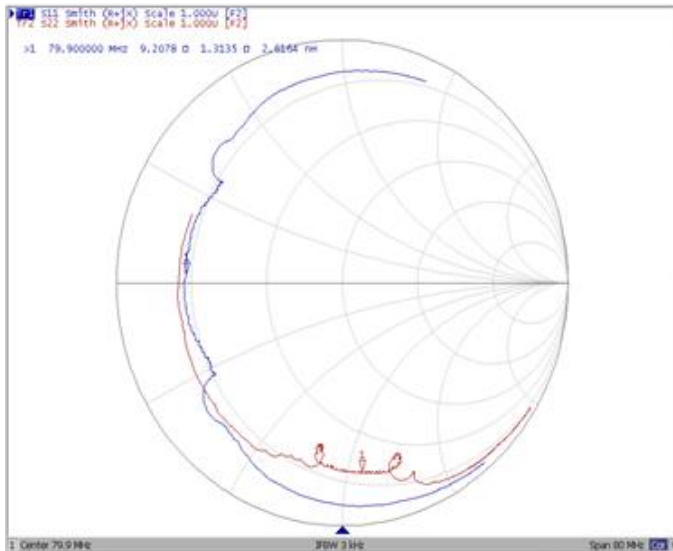

SWR

