

- 93.75 MHz IF SAW Filter / 29.65 MHz Bandwidth
- Revision 0: 19. Aug. 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-30	-	+70
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	93.75	-
Insertion Loss at Fo	dB	-	24.20	27.00
Group Delay Variation at Fo ± 14.22 MHz	nsec	-	25	70
Absolute Delay at Fo	usec	-	1.98	2.10
Passband Ripple Variation at Fo ± 14.22 MHz	dB	-	0.55	1.00
Bandwidth at -1dB	MHz	-	29.65	-
Bandwidth at -3dB	MHz	-	30.00	-
Bandwidth at -40dB	MHz	-	31.48	-
Ultimate Rejection	dB	50	54	-
Temperature Coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

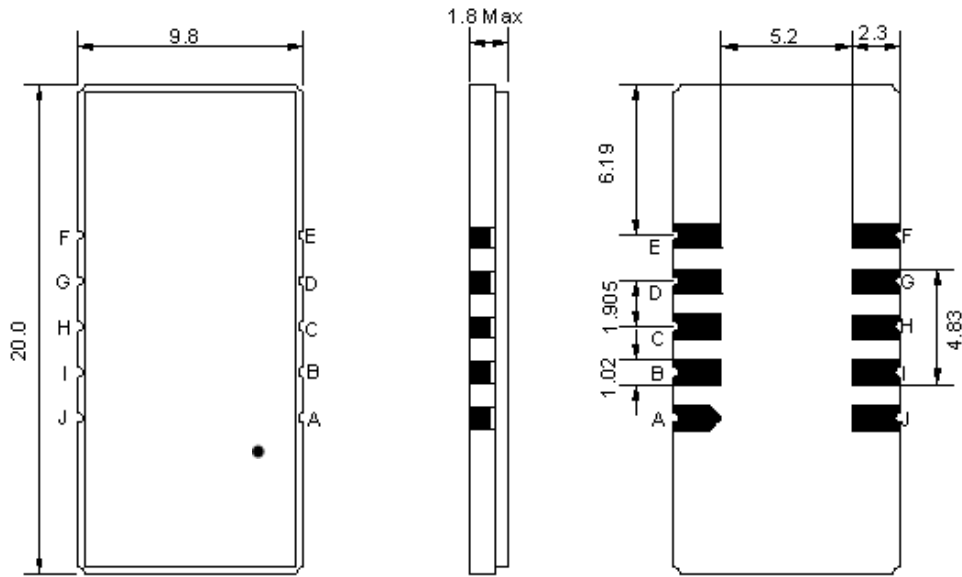

- ① **TRANSKO:** Brand
- ② **TA09329A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

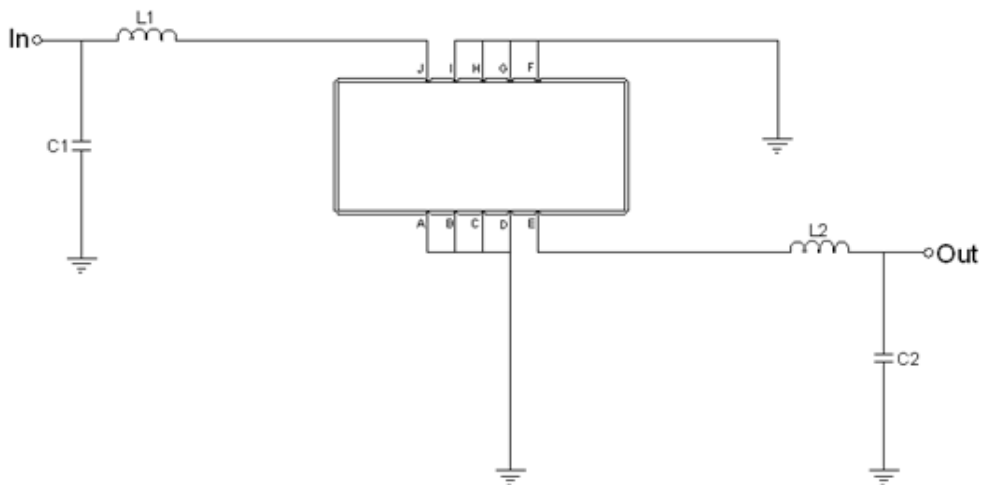



Test Fixture & Values	
Input	L1 = 120 nH, C1=18 pF
Output	L2 = 120 nH, C2=18 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

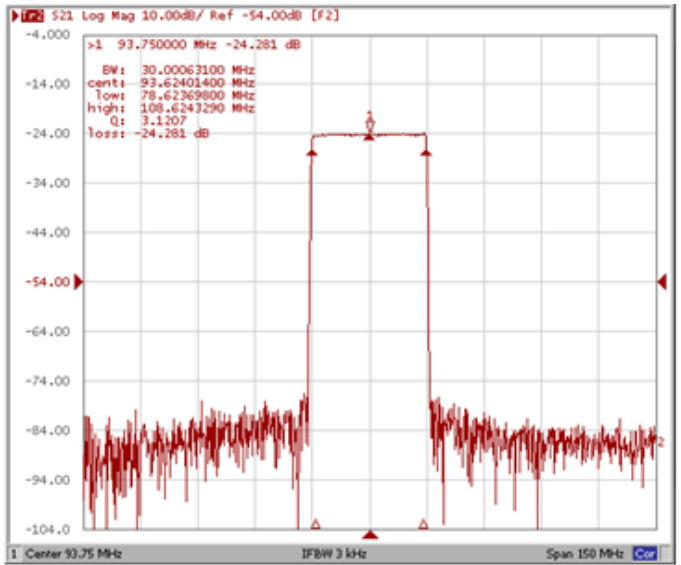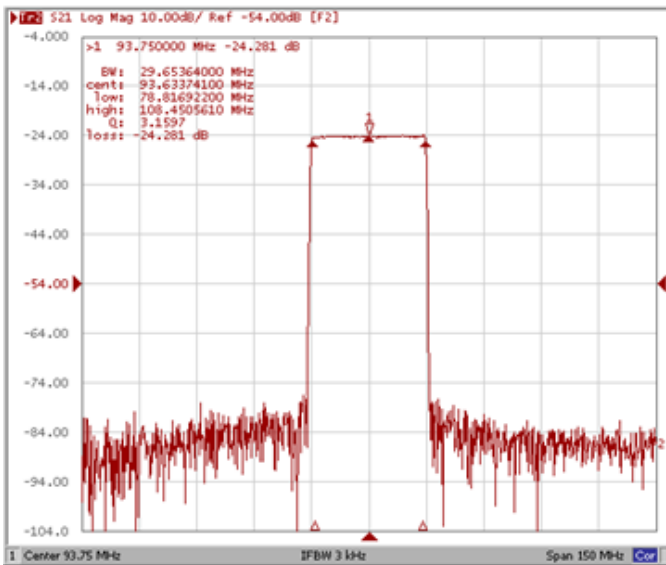

Bandwidth at -20.0 dB



Bandwidth at -40.0 dB

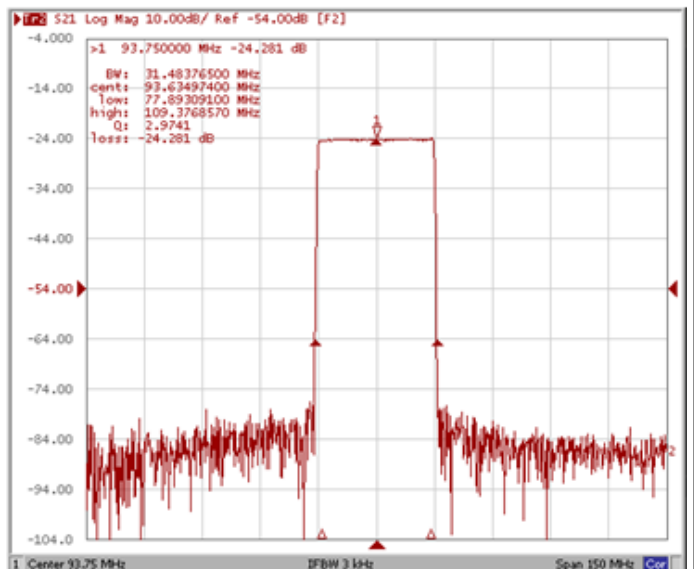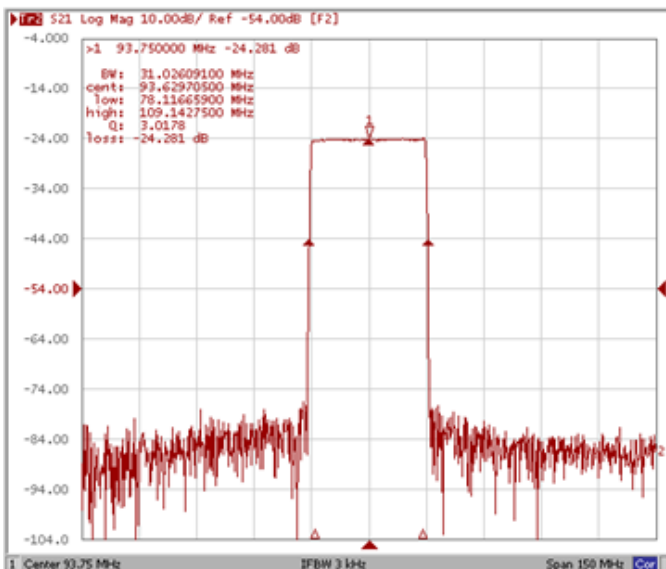

Frequency Response

Ripple Variation Fo±14.22MHz

Group Delay Variation Fo±14.22MHz

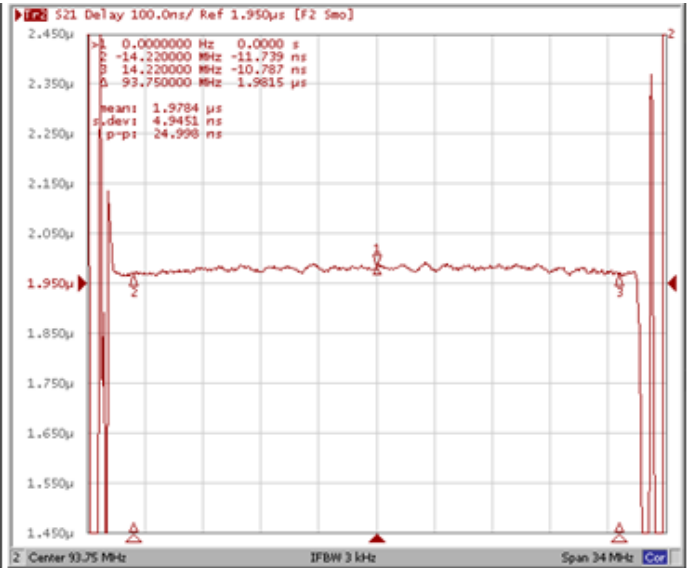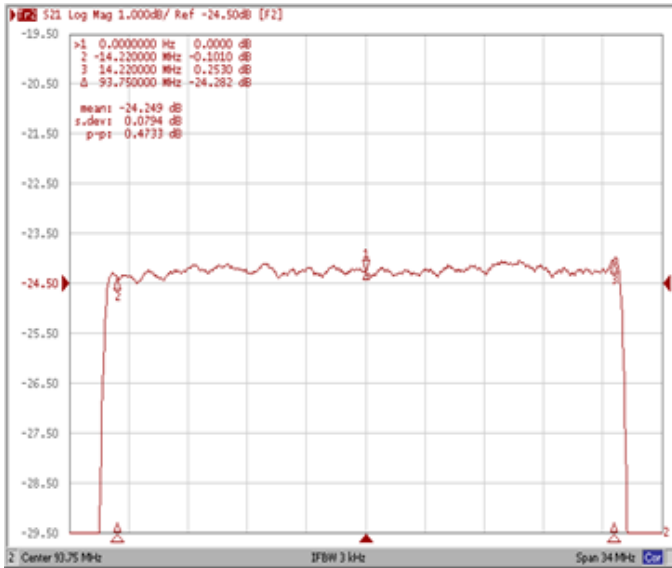

Smith Chart

VSWR

