

- 132.3 MHz IF SAW Filter / 12.55 MHz Bandwidth
- Revision 0: 29. Sep. 2009


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-5	-	65
Storage Temperature Range	°C	-30	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	132.3	-
Insertion Loss at Fo	dB	-	20.5	22.0
Group Delay Variation at Fo ±6.00 MHz	ns	-	48	90
Absolute Delay at Fo	us	-	1.59	-
Amplitude Ripple at Fo ±6.00 MHz	dB	-	0.50	-
Bandwidth at -1dB	MHz	12.40	12.55	-
Bandwidth at -3dB	MHz	-	13.05	-
Bandwidth at -25dB	MHz	-	14.60	14.80
Bandwidth at -40dB	MHz	-	15.00	15.30
Relative Attenuation:				
Lower Sidelobe	dB	50	55	-
Upper Sidelobe	dB	50	55	-
Temperature Coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

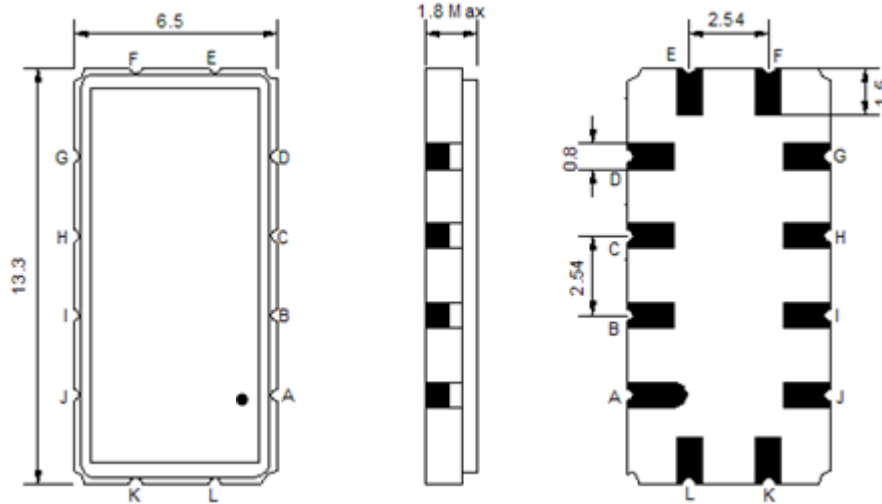

- ① **TRANSKO:** Brand
- ② **TA13212A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

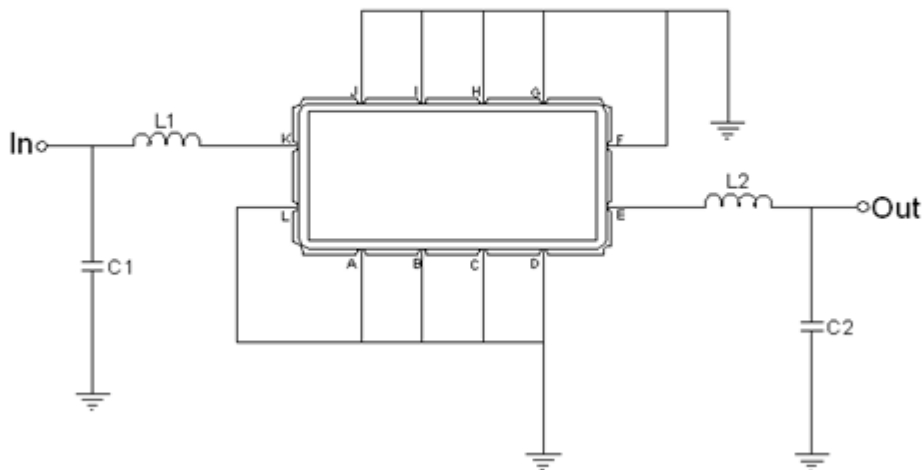


Test Fixture & Values	
Input	L1 = 27 nH , C1 = 5 pF
Output	L2 = 27 nH , C2 = 5 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

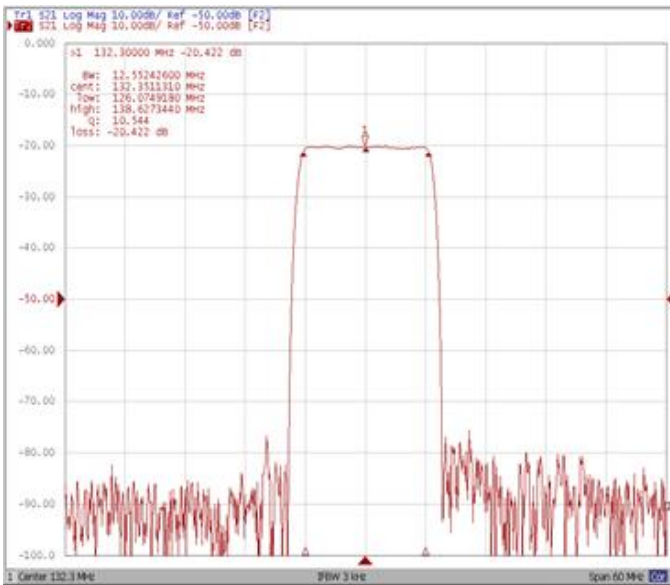


Bandwidth at -25.0 dB

Bandwidth at -40.0 dB

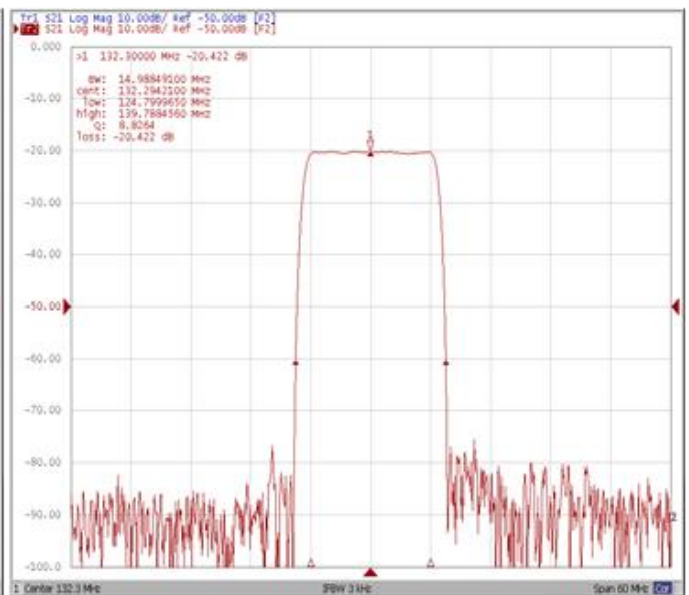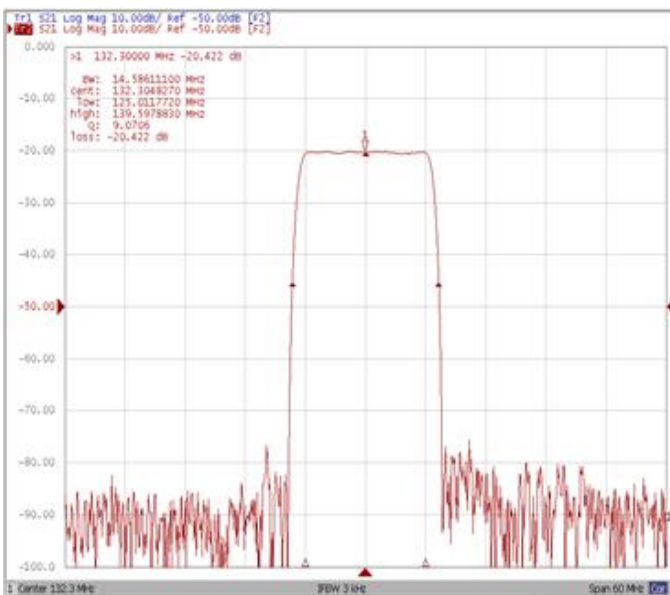


Frequency Response


Ripple Variation Fo ±6.00 MHz

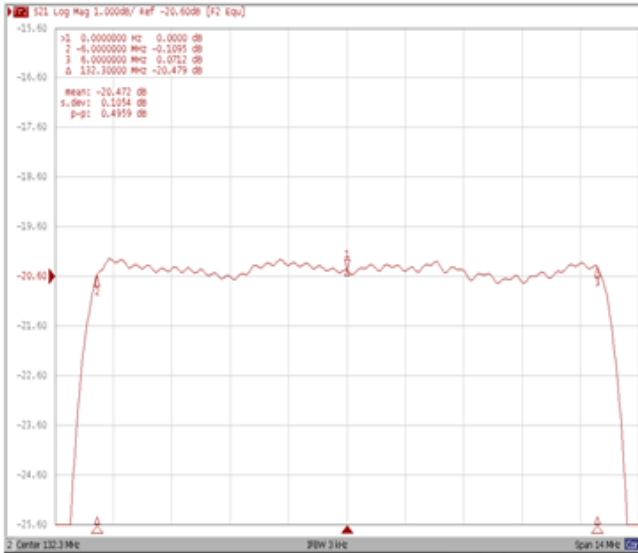

Group Delay Variation Fo ±6.00 MHz

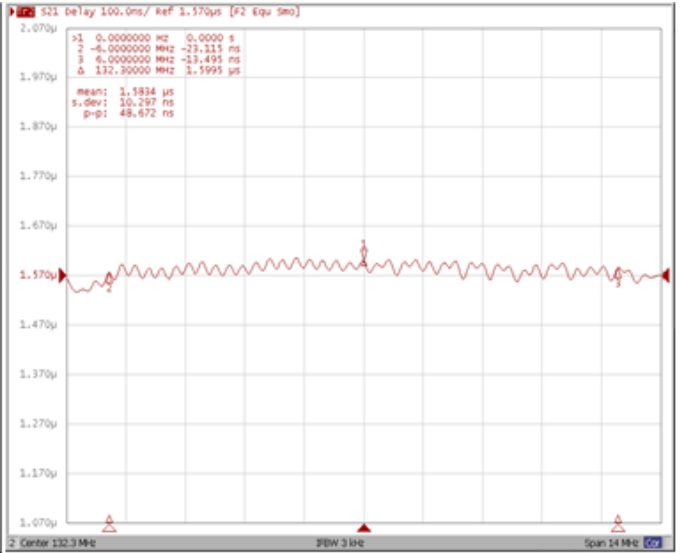

Smith Chart

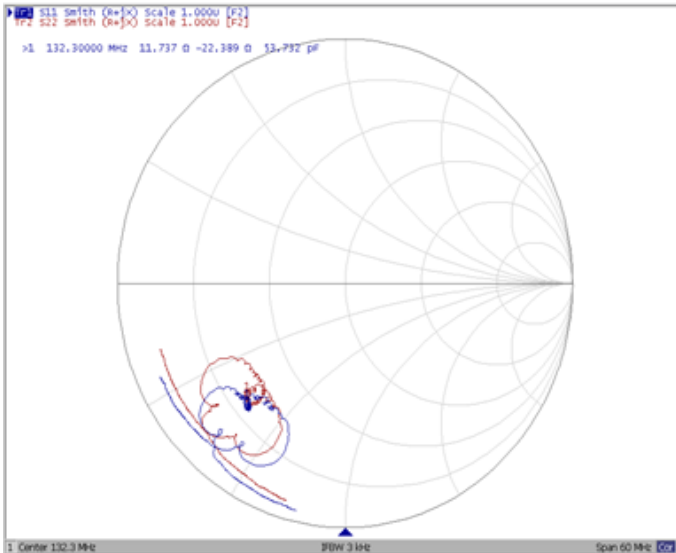

VSWR

