

- 136.25 MHz IF SAW Filter / 2.05 MHz Bandwidth
- Revision 0: 26. Feb. 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	0	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	136.25	-
Insertion Loss at Fo	dB	-	18.5	21.0
Temperature Coefficient	ppm/°C	-	-0.03	-
Amplitude Ripple within fo ±0.75 MHz	dB _{p-p}	-	0.4	1.0
Group Delay Variation within fo ±0.75 MHz	nsec	-	90	150
Absolute Delay at Fo	µsec	-	1.70	-
Bandwidth at -1.0 dB	MHz	1.50	2.05	-
Bandwidth at -3.0 dB	MHz	-	2.35	-
Bandwidth at -40.0 dB	MHz	-	3.65	4.20
Relative Attenuation:				
Fo ±2.75 MHz	dB	55	60	
Lower Sidelobe	dB	50	55	-
Upper Sidelobe	dB	50	55	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

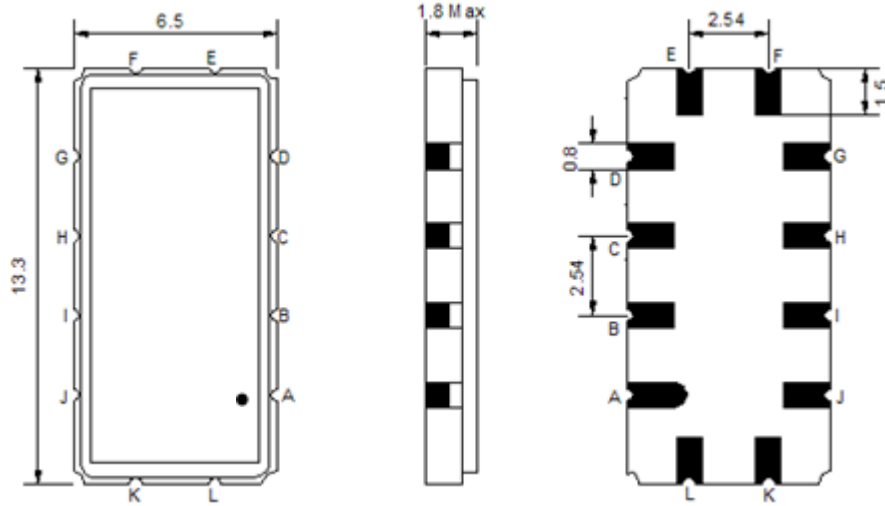

- ① **TRANSKO:** Brand
- ② **TA13602A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

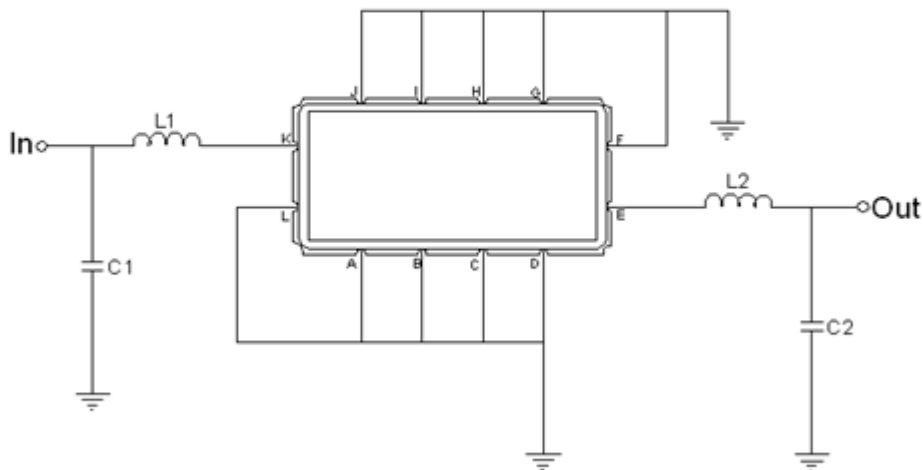


Test Fixture & Values	
Input	L1=82nH, C1=36pF
Output	L2=68nH, C2=47pF
Source/Load Impedance	50 Ω


Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

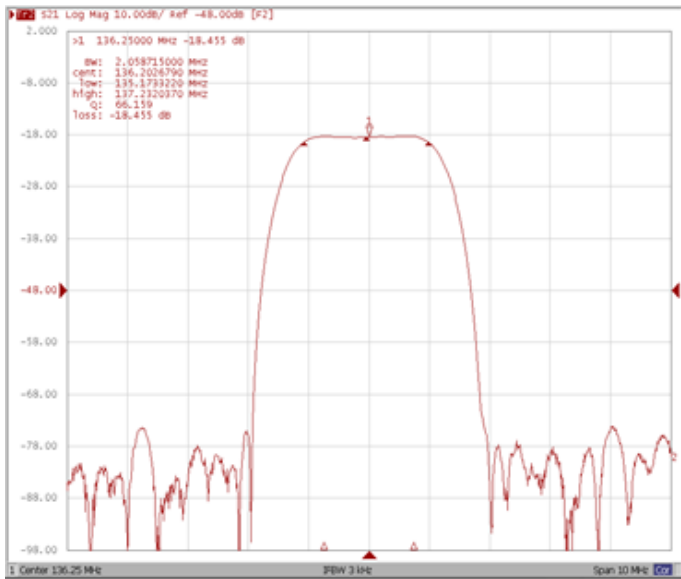


Bandwidth at -3.0 dB

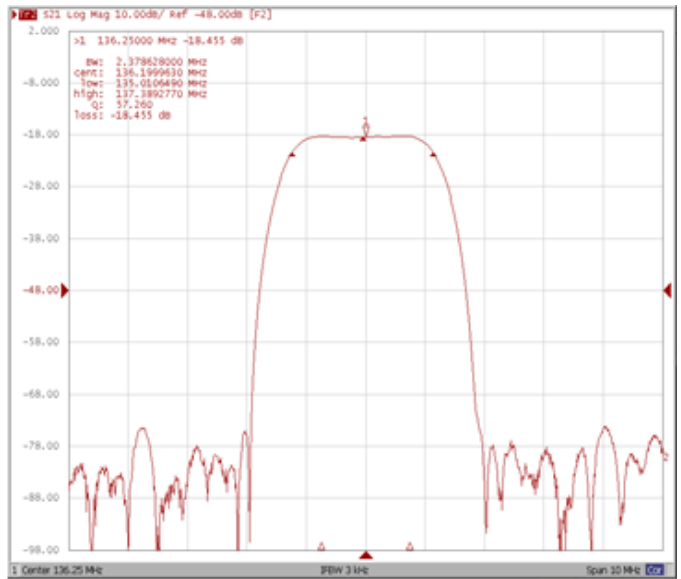

Bandwidth at -40.0 dB

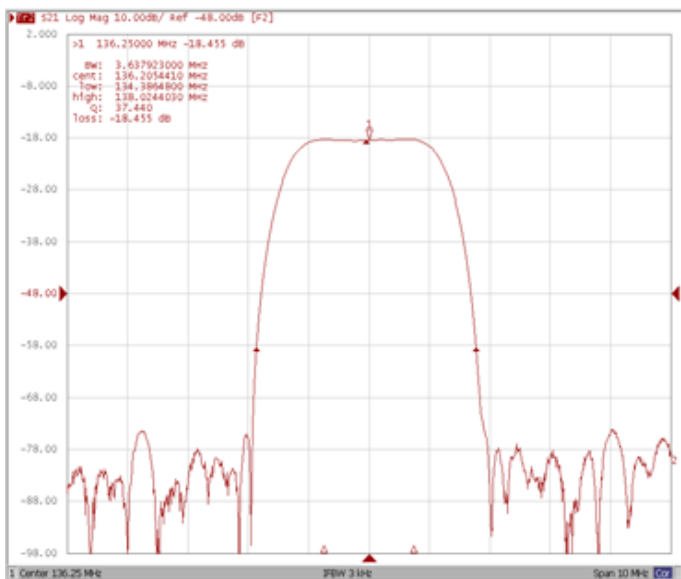


Attenuation Fo±2.75MHz

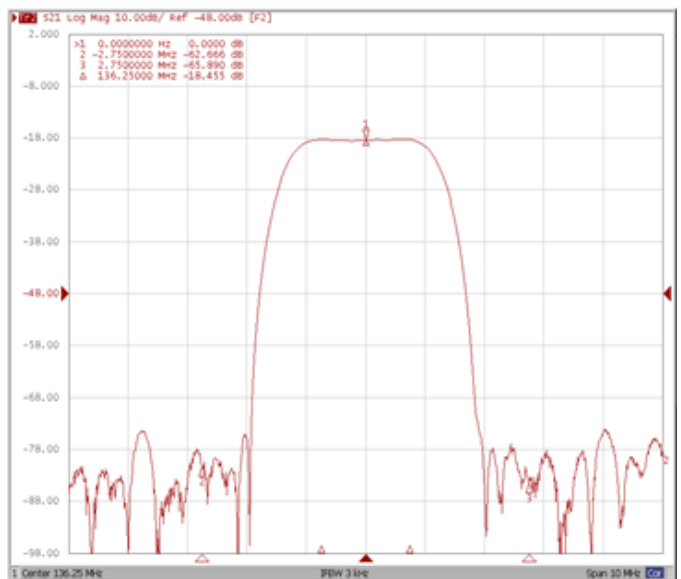


Frequency Response


Ripple Variation Fo±0.75MHz

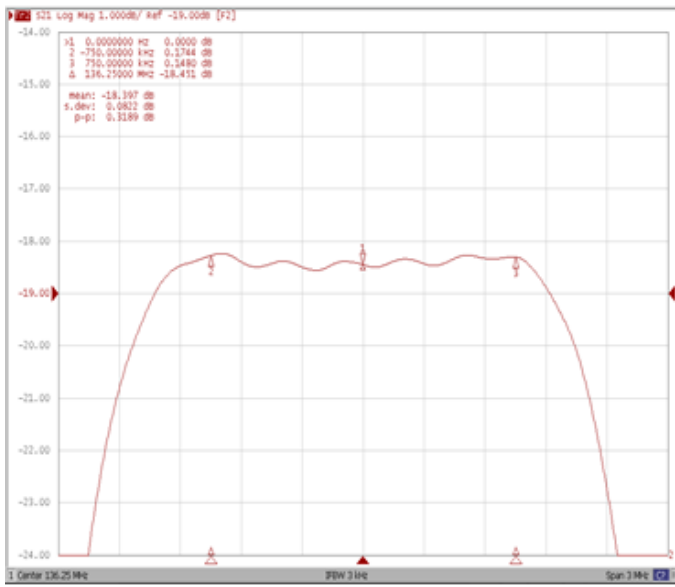

Group Delay Variation Fo±0.75MHz

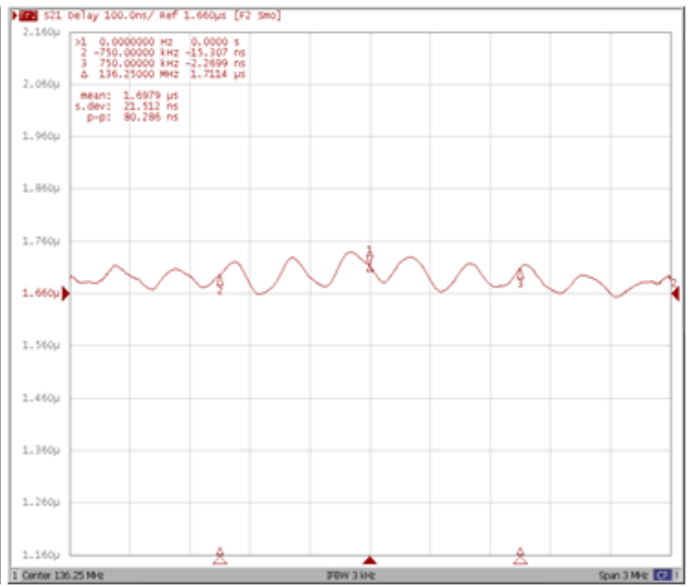

Smith Chart

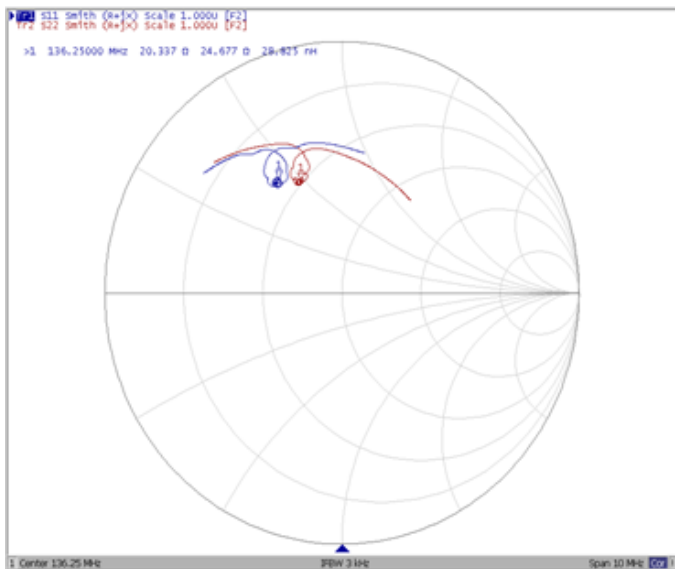

SWR

