

- 264.00 MHz IF SAW Filter / 25.93 MHz Bandwidth
- Revision 0: 04. Jun. 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-5	-	60
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	264.00	-
Insertion Loss at Fo	dB	-	27.00	29.00
Group Delay Variation at Fo ± 12.50 MHz	nsec	-	30	60
Absolute Delay at Fo	usec	-	2.02	-
Passband Ripple Variation at Fo ± 12.50 MHz	dB	-	0.70	1.10
Bandwidth at -1dB	MHz	25.60	25.93	-
Bandwidth at -3dB	MHz	-	26.37	-
Bandwidth at -40dB	MHz	-	28.25	28.50
Ultimate Rejection	dB	48	52	-
Temperature Coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

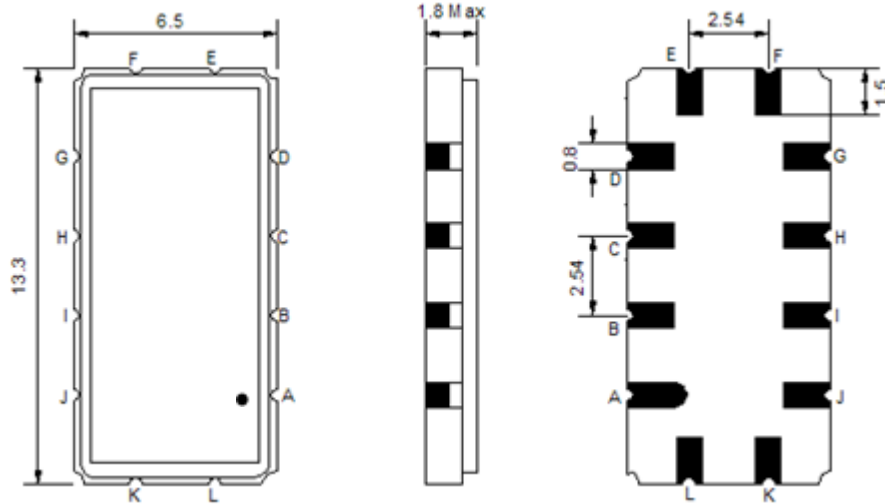

- ① TRANSKO: Brand
- ② TA26425B: Model Name
- ③ X : Date Code (Year)
- ④ Y : Date Code (Month)
- ⑤ Z : Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

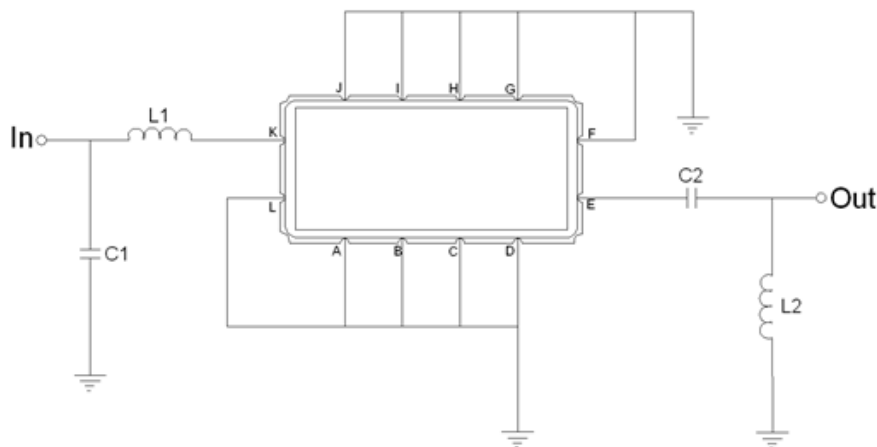



Test Fixture & Values	
Input	L1 = 12 nH, C1 = 43 pF
Output	L2 = 10 nH, C2 = 56 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

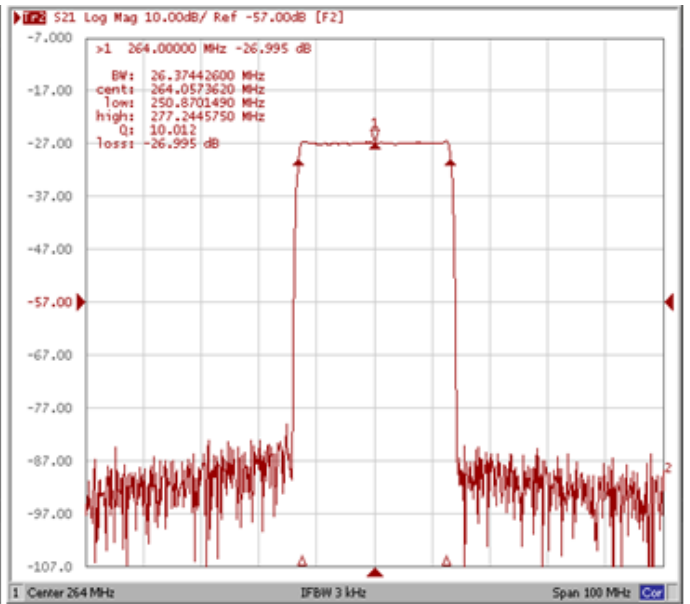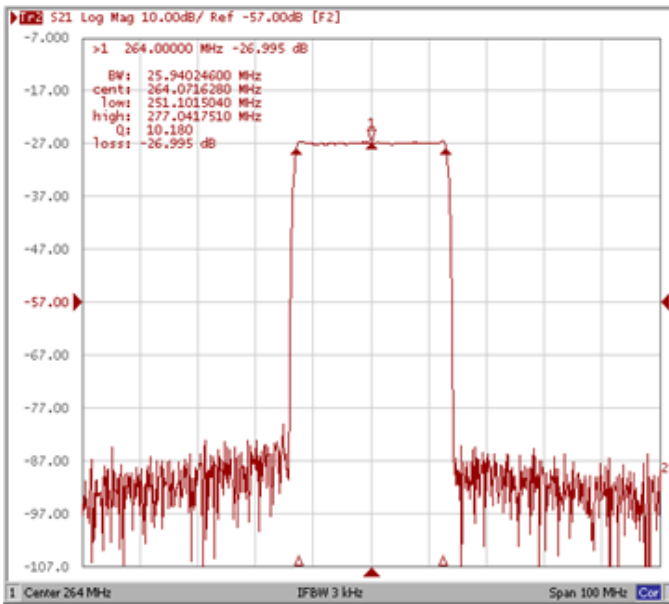


Bandwidth at -40.0 dB

Wide-Band

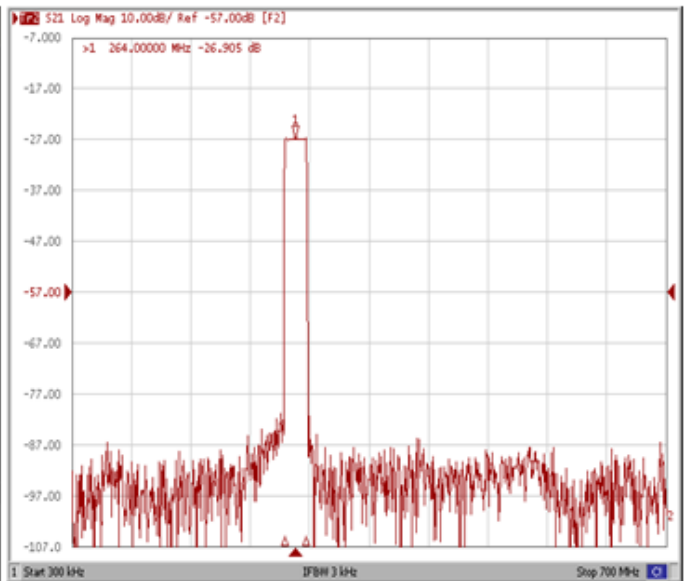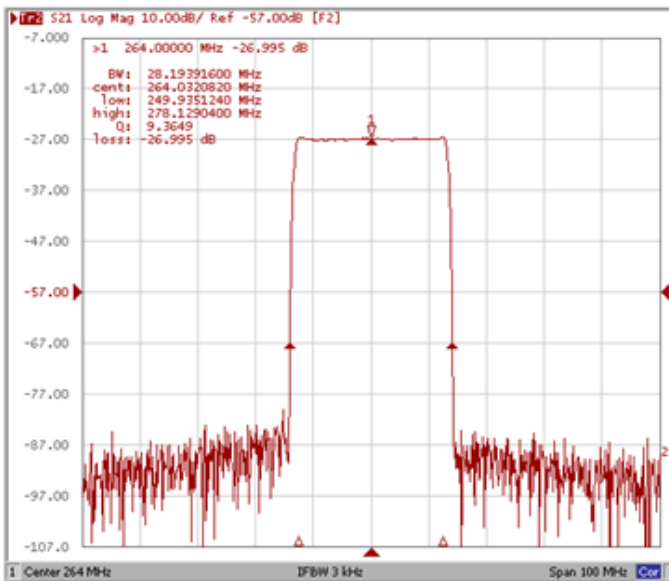


Frequency Response


Ripple Variation Fo±12.50 MHz

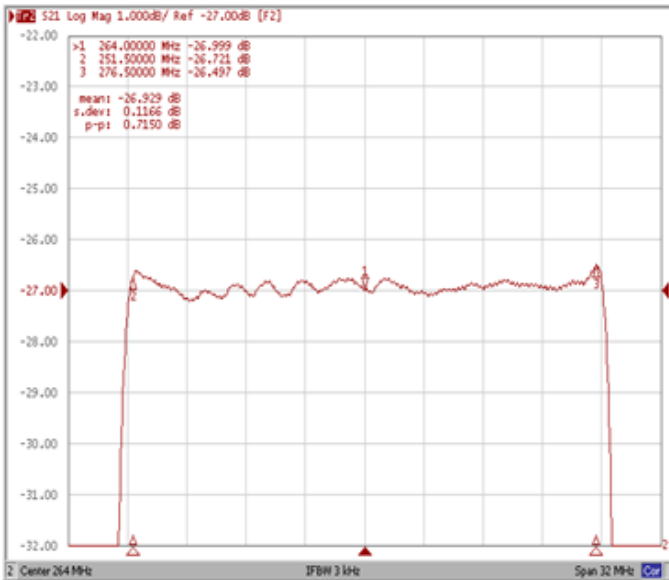

Group Delay Variation Fo±12.50 MHz

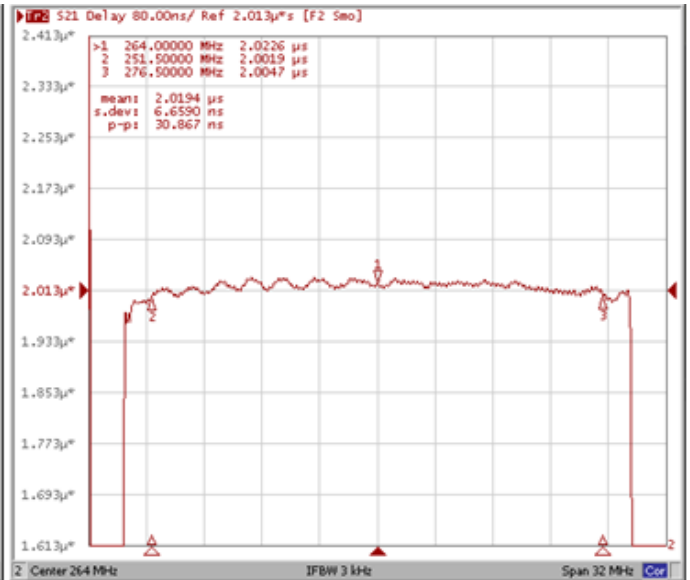

Smith Chart

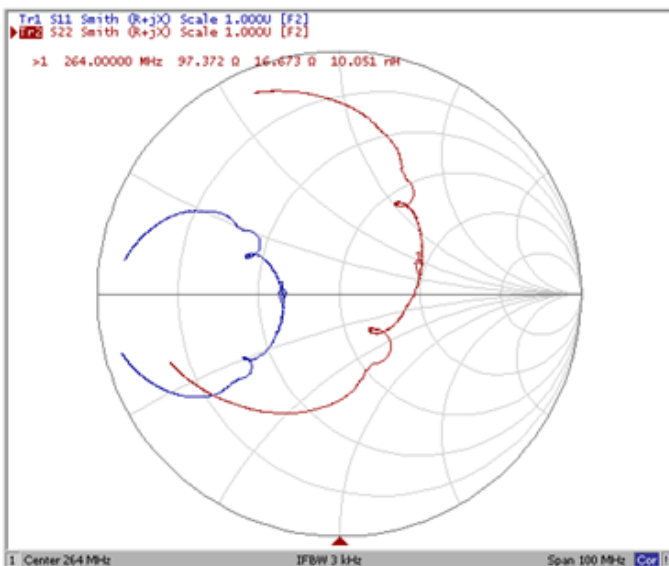

VSWR

