

- 60.00 MHz IF SAW Filter / 20.05 MHz Bandwidth
- Revision 0: 22 Jul. 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	0		70
Storage Temperature Range	°C	-30	-	80
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	60.0	-
Insertion Loss at Fo	dB	-	14.6	16.0
Group Delay Variation (Fo±9.22MHz)	ns	-	30	80
Absolute Delay	us	-	1.34	-
Passband Ripple (Fo±9.22MHz)	dB	-	0.4	1.0
Bandwidth at -1dB	MHz	18.44	20.05	-
Bandwidth at -10dB	MHz	-	21.95	22.5
Bandwidth at -20dB	MHz	-	22.75	23.1
Bandwidth at -30dB	MHz	-	23.35	23.7
Bandwidth at -40dB	MHz	-	24.00	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C		-86	

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

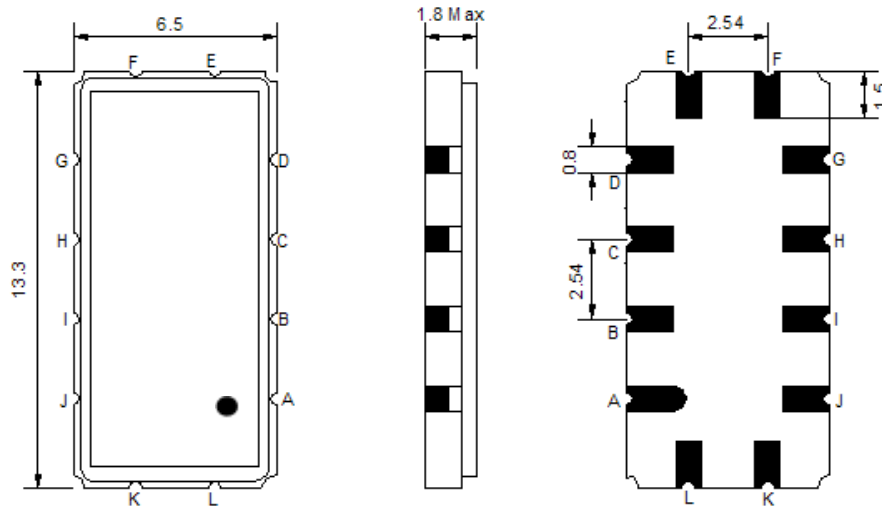

- ① **TRANSKO:** Brand
- ② **TL06020B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

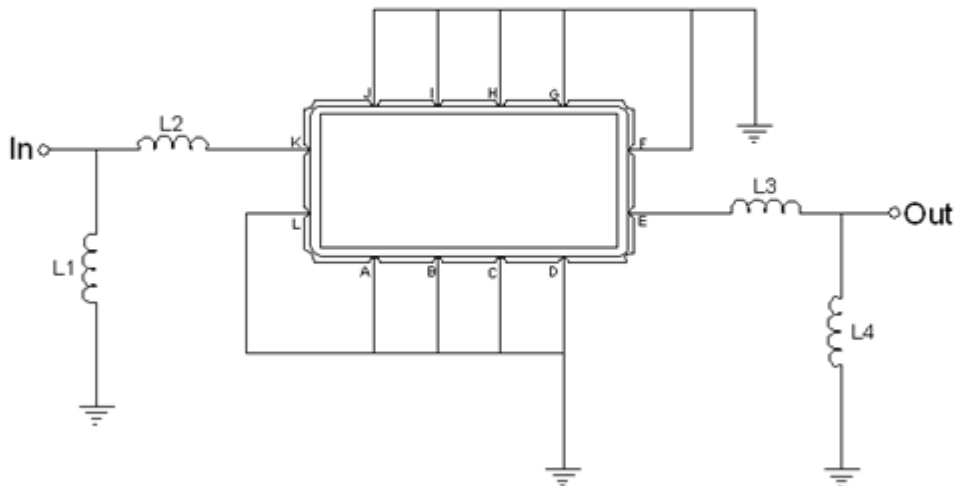



Test Fixture & Values	
Input	L1=100 nH, L2=22 nH
Output	L3=27 nH, L4=150 nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -10.0 dB

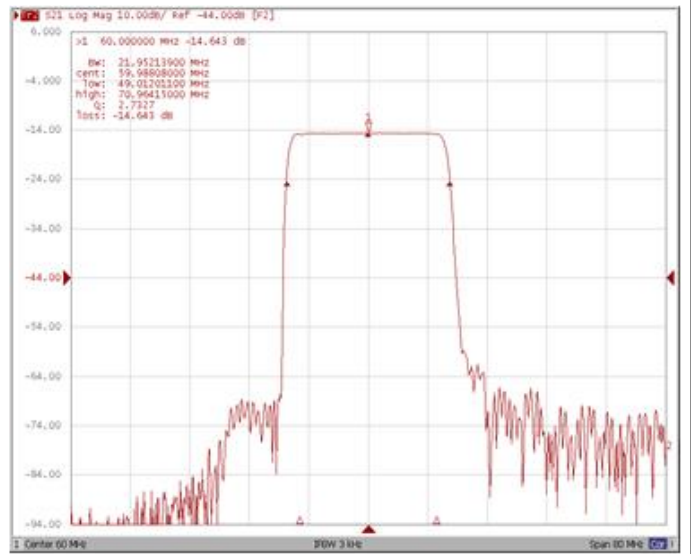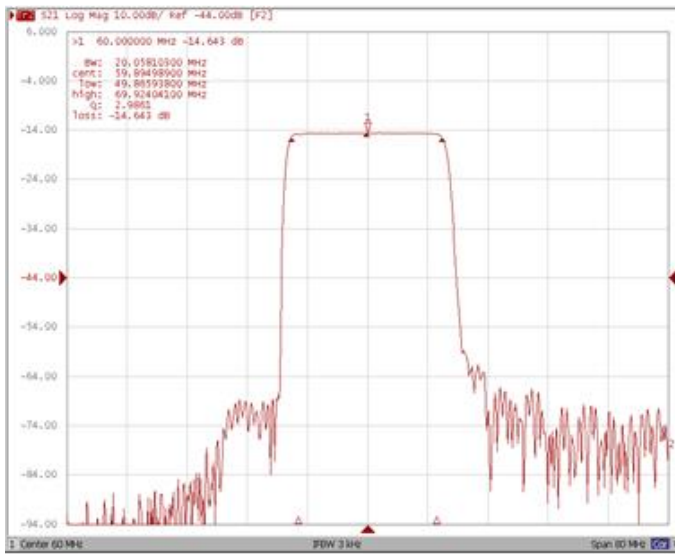


Bandwidth at -20.0 dB

Bandwidth at -40.0 dB

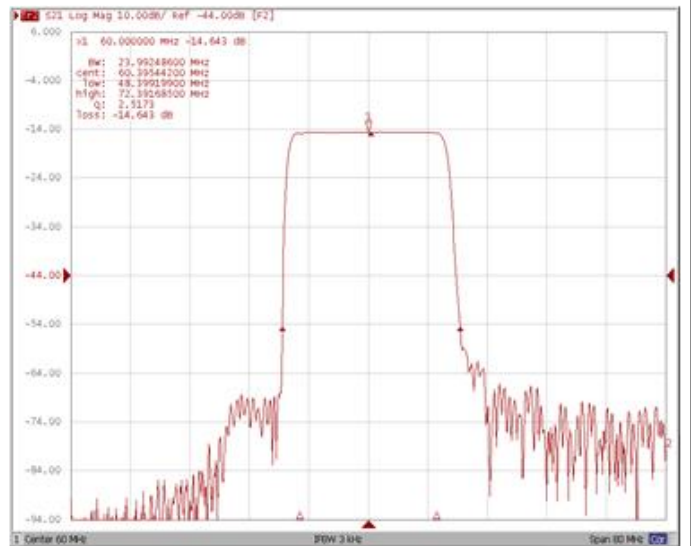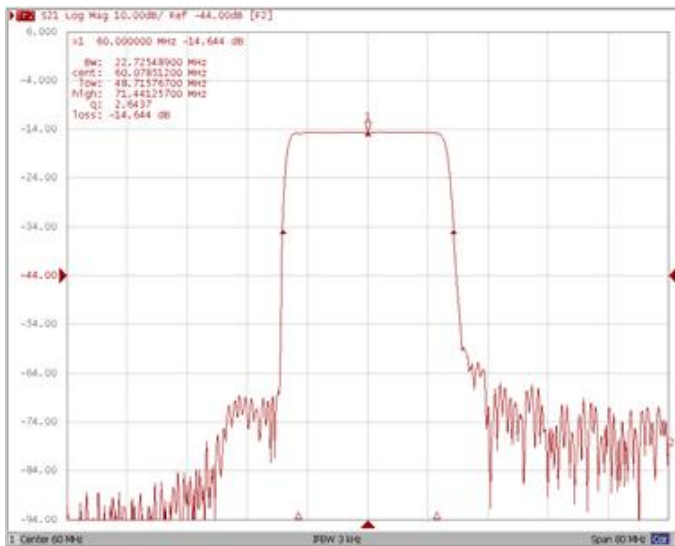


Frequency Response


Ripple Variation Fo±9.22MHz

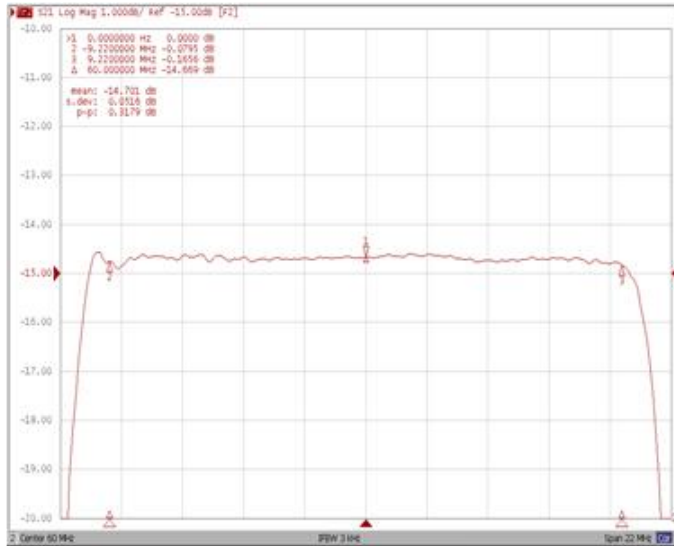

Group Delay Variation Fo±9.22MHz

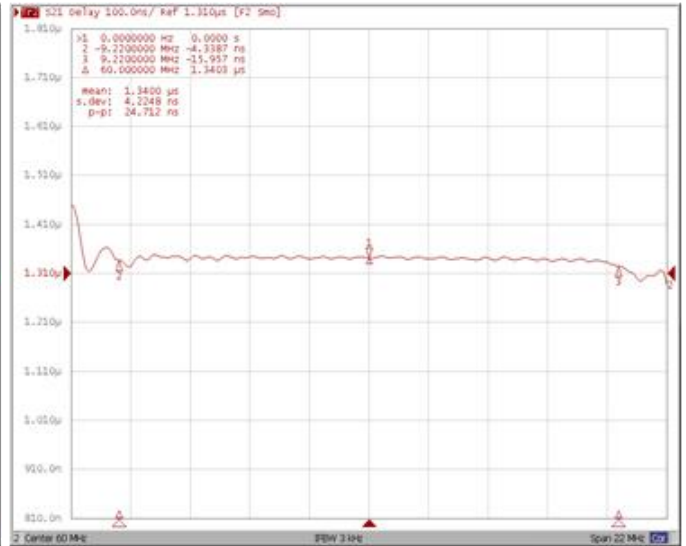

Smith Chart

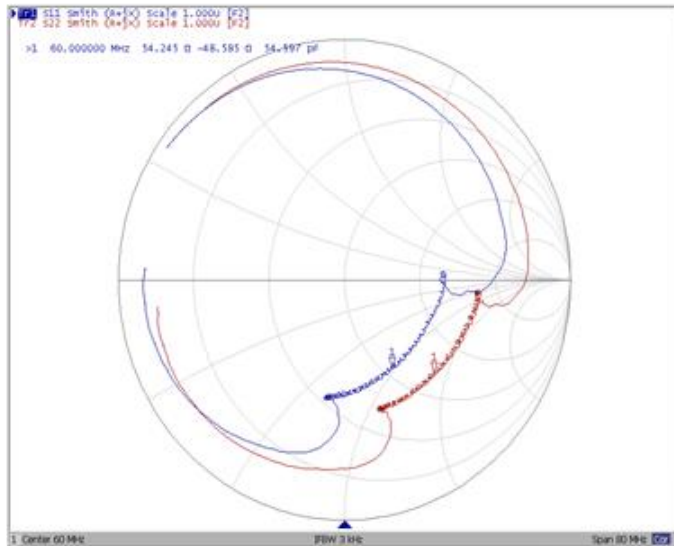

VSWR

