

- 63.8 MHz IF SAW Filter / 3.75 MHz Bandwidth
- Revision 0: 5 Mar. 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-5	-	65
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	63.70	63.80	63.90
Insertion Loss at Fo	dB	-	13.50	15.00
Group Delay Variation (Fo±1.50MHz)	ns	-	37	80
Absolute Delay Time at Fo	us	-	1.67	-
Temperature Coefficient	ppm/°C	-	-18	-
Amplitude Ripple (Fo±1.50MHz)	dB	-	0.30	0.80
Bandwidth at -1dB	MHz	3.50	3.74	-
Bandwidth at -3dB	MHz	3.90	4.17	-
Bandwidth at -25dB	MHz	-	5.42	6.70
Bandwidth at -40dB	MHz	-	5.95	6.20
Ultimate Rejection	dB	45	50	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

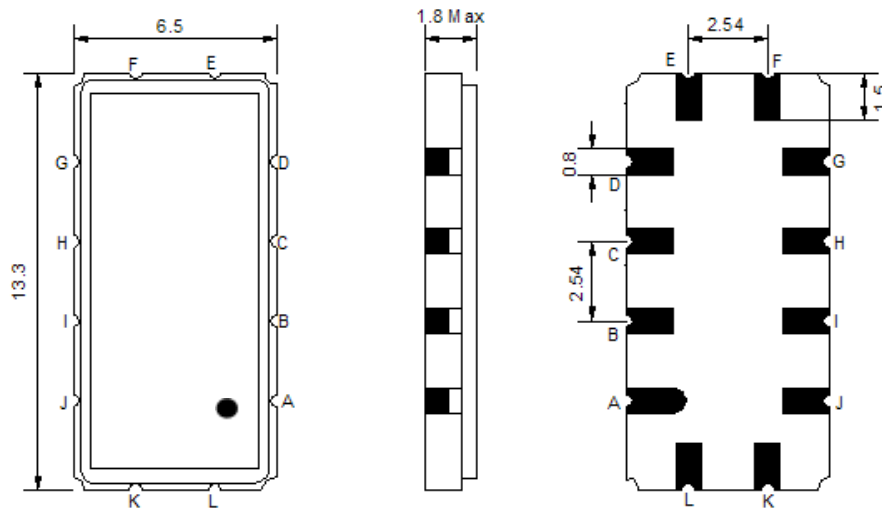

- ① **TRANSKO:** Brand
- ② **TL06303B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

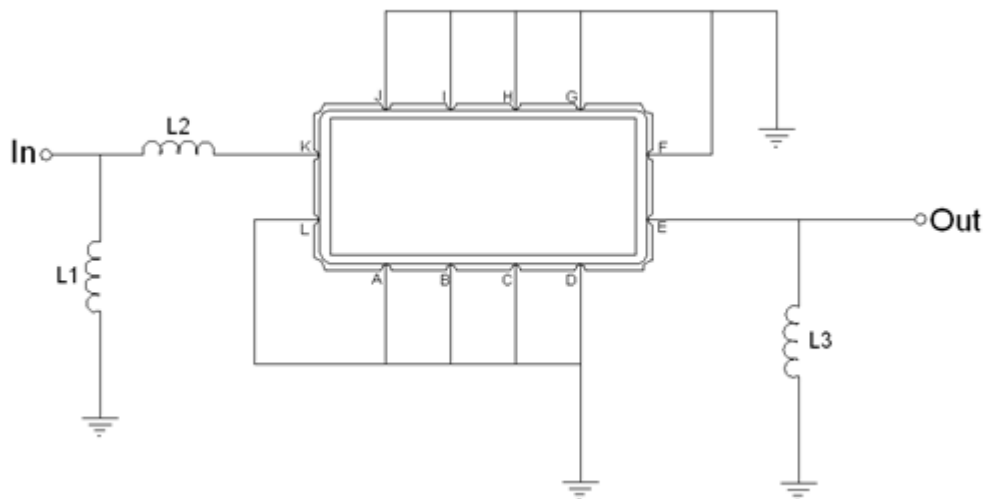



Test Fixture & Values	
Input	L1 = 68 nH, L2 = 12nH
Output	L3 = 56 nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

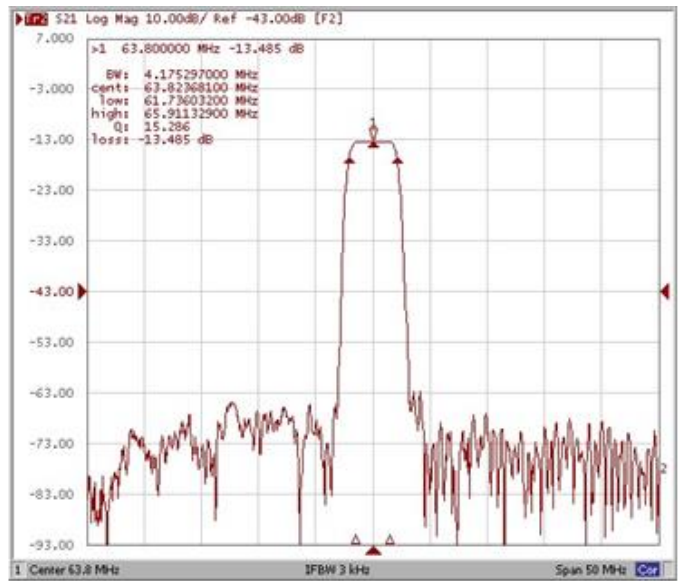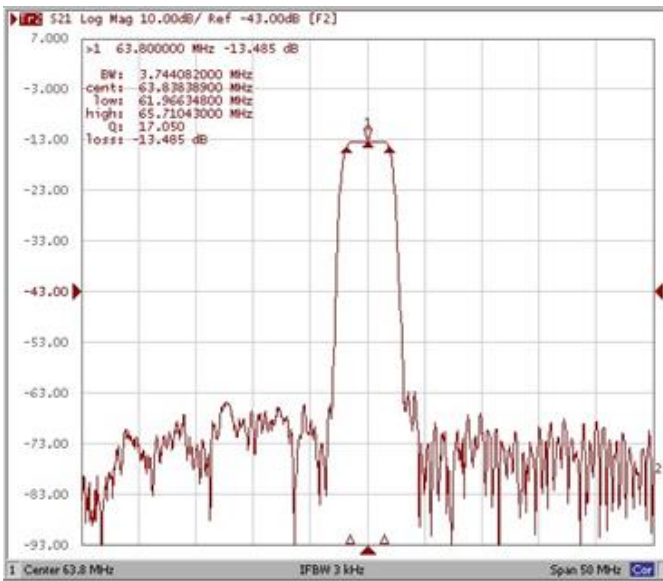


Bandwidth at -25.0 dB

Bandwidth at -40.0 dB

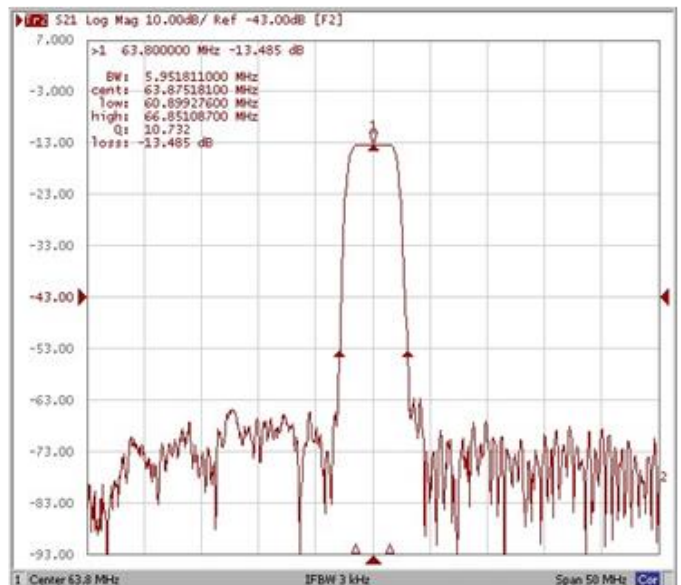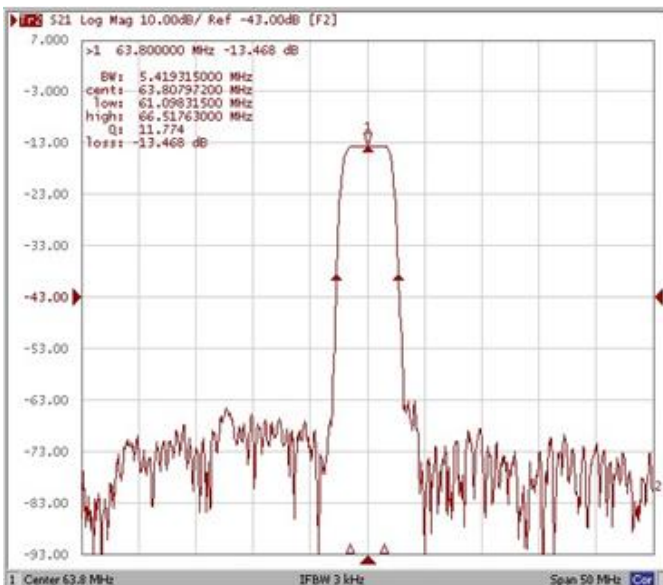


Frequency Response


Ripple Variation Fo±1.50MHz

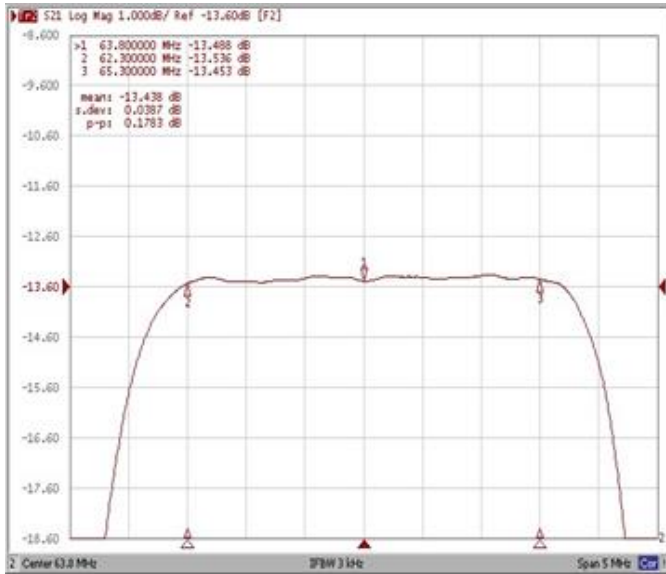

Group Delay Variation Fo±1.50MHz

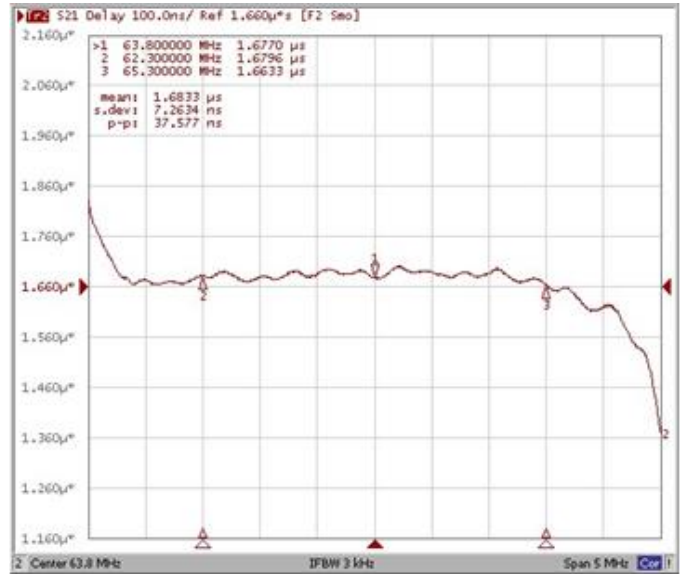

Smith Chart

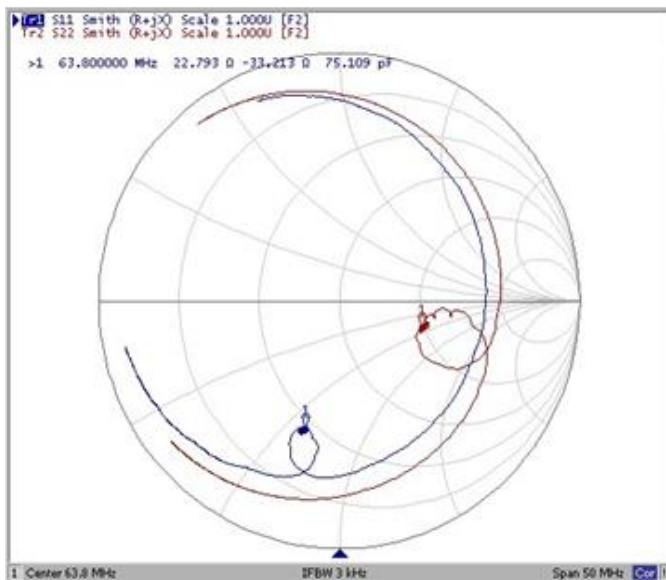

VSWR

