

- 75.00 MHz IF SAW Filter / 7.12 MHz Bandwidth
- Revision 0: 24 Nov. 2008

Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	75.0	-
Insertion Loss at Fo	dB	-	14.0	17.0
Group Delay Variation (Fo±3.15MHz)	nsec	-	38	70
Absolute Delay at Fo	usec	-	1.23	-
Passband Ripple Variation (Fo±3.15MHz)	dB	-	0.32	0.80
Bandwidth at -1dB	MHz	6.90	7.12	-
Bandwidth at -3dB	MHz	-	7.85	-
Bandwidth at -40dB	MHz	-	10.35	10.60
Ultimate Rejection	dB	40	45	-
VSWR	dB	-	2.3	-
Temperature Coefficient	ppm/°C	-	-18	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions



- ① **TRANSKO:** Brand
- ② **TL07507B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

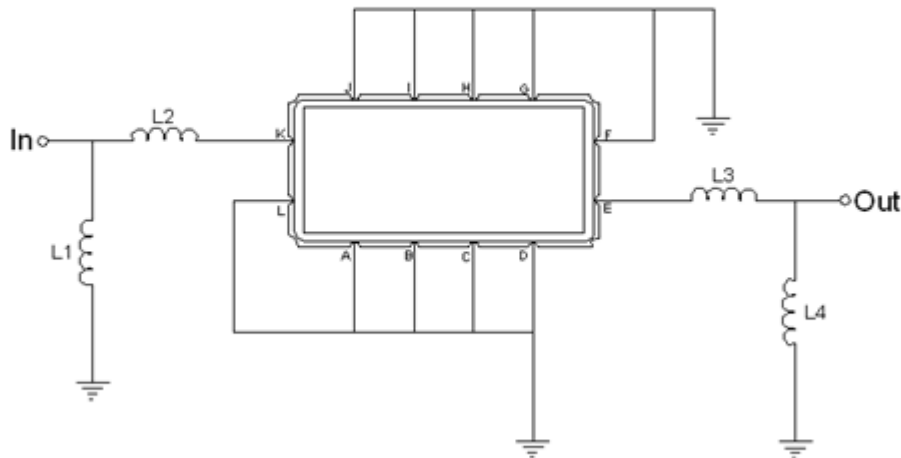



Test Fixture & Values	
Input	L1 = 33 nH, L2 = 8.2 nH
Output	L3 = 12 nH, L4 = 39 nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

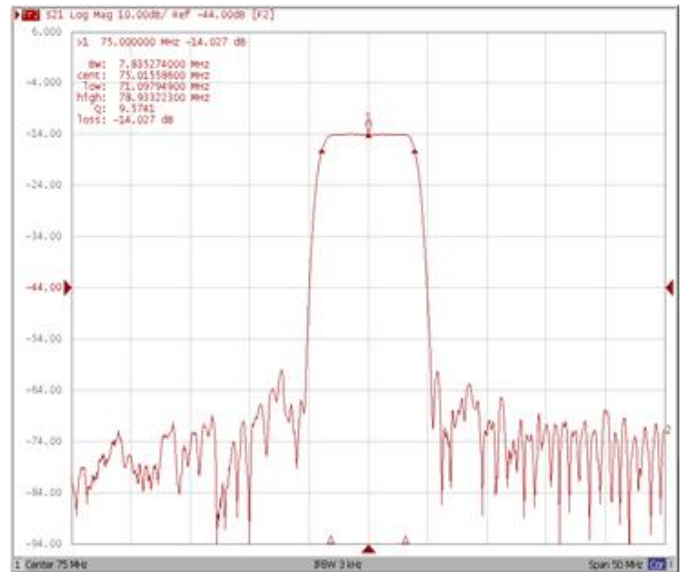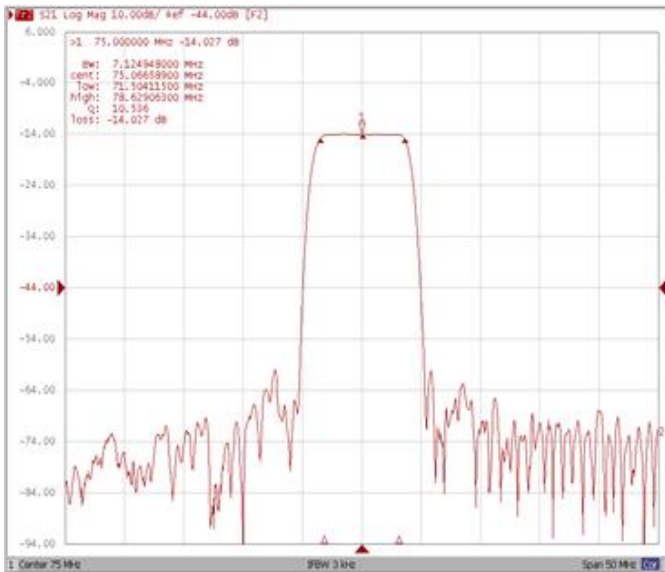


Bandwidth at -30.0 dB

Bandwidth at -40.0 dB

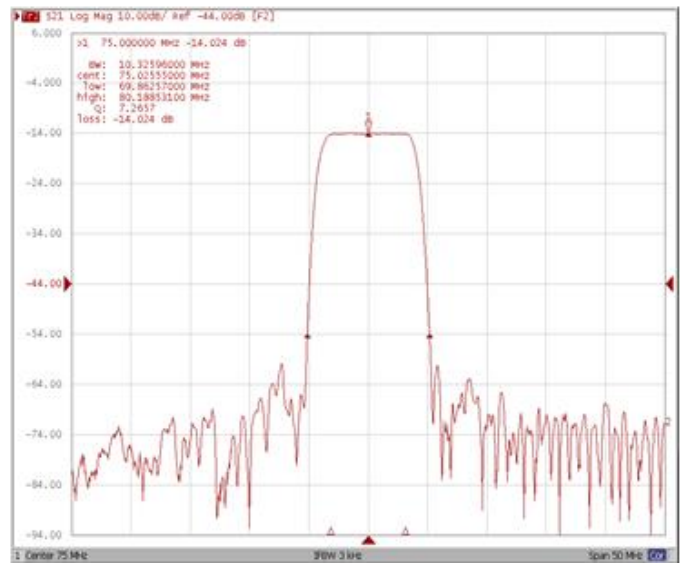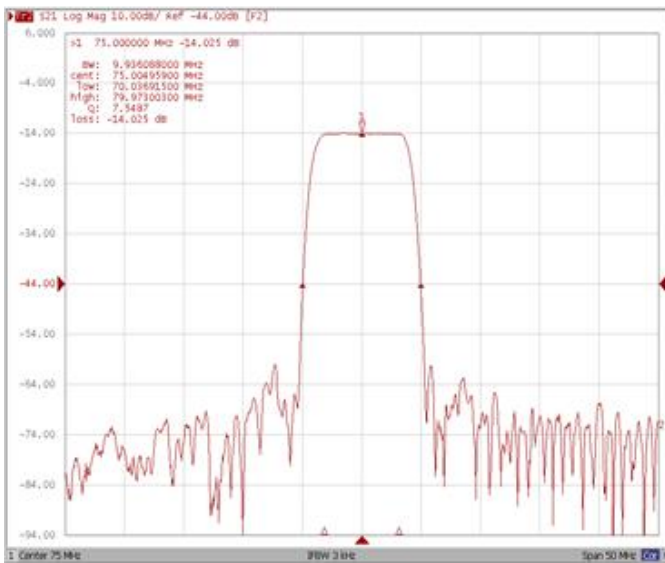


Frequency Response


Ripple Variation Fo±3.15MHz

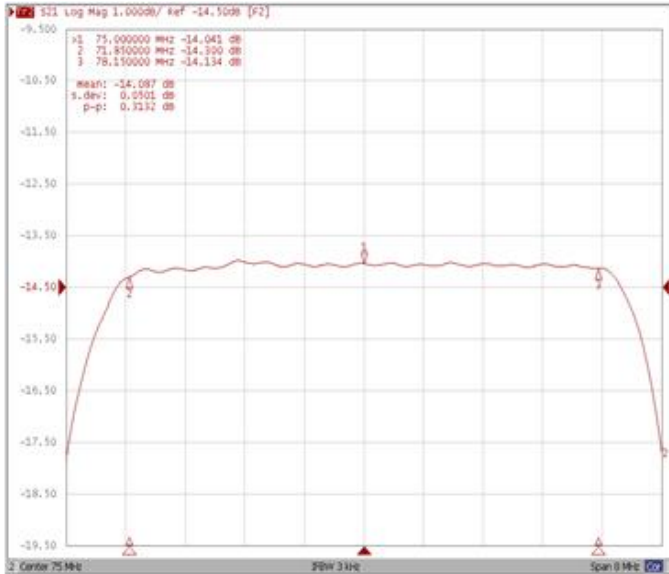

Group Delay Variation Fo±3.15MHz

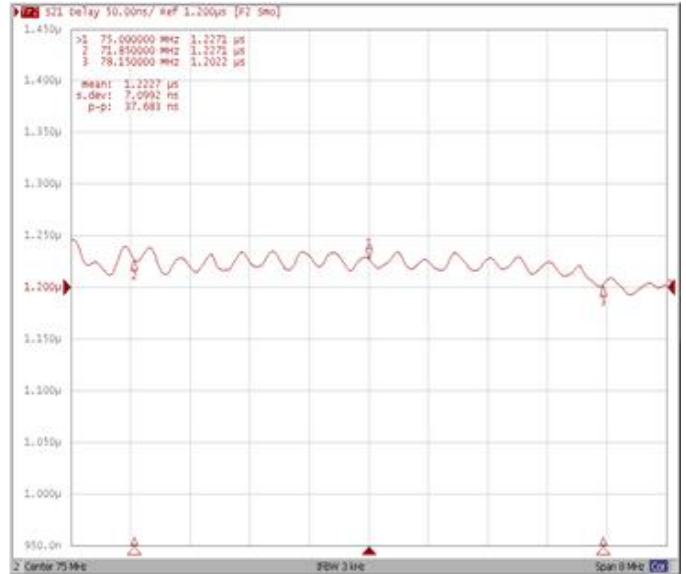

Smith Chart

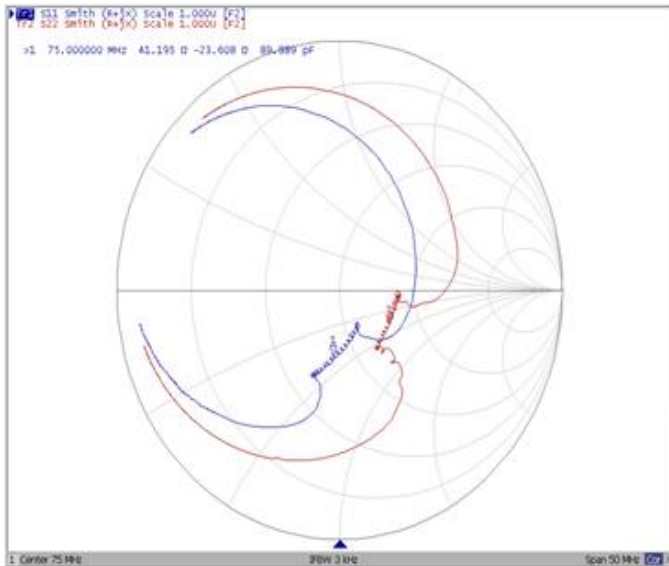

SWR

