

- 80.0 MHz IF SAW Filter / 31.54 MHz Bandwidth
- Revision 0: 10 Feb. 2009

Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-10	-	75
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	80.00	-
Insertion Loss at Fo	dB	-	17.00	18.50
Group Delay Variation at Fo ± 14.32 MHz	nsec	-	16	35
Absolute Delay at Fo	usec	-	0.98	-
Passband Ripple Variation at Fo ± 14.32 MHz	dB	-	0.30	0.70
Bandwidth at -1dB	MHz	31.00	31.54	-
Bandwidth at -3dB	MHz	-	32.48	-
Bandwidth at -30dB	MHz	-	35.63	35.90
Bandwidth at -40dB	MHz	-	36.19	-
Ultimate Rejection	dB	40	46	-
Temperature Coefficient	ppm/°C	-	-86	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions



- ① **TRANSKO:** Brand
- ② **TL08030A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

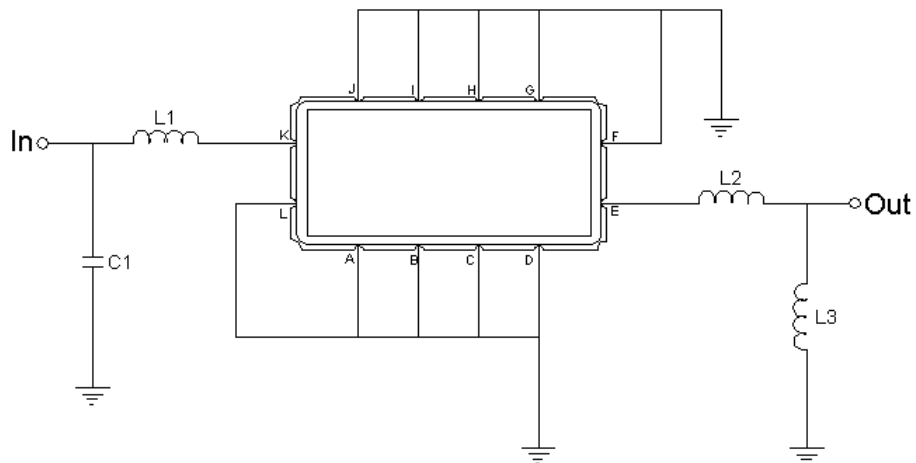



Test Fixture & Values	
Input	L1 = 82nH, C1=43pF
Output	L2 = 33nH, L3=68nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

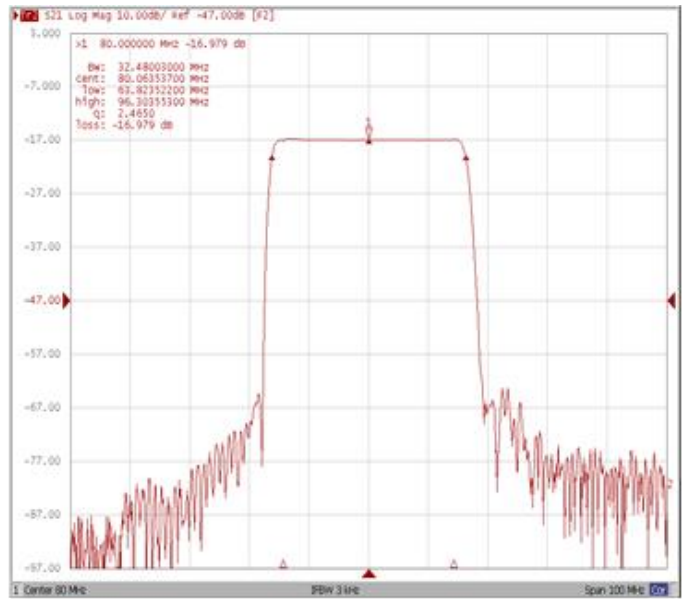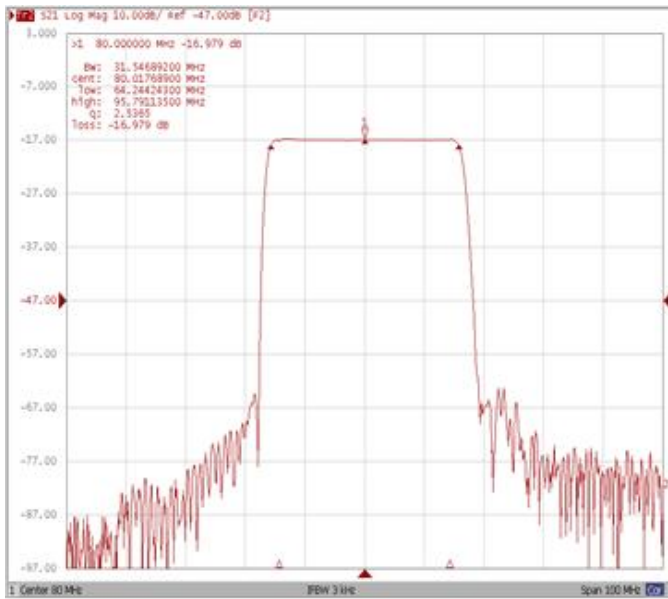

Bandwidth at -30.0 dB



Bandwidth at -40.0 dB

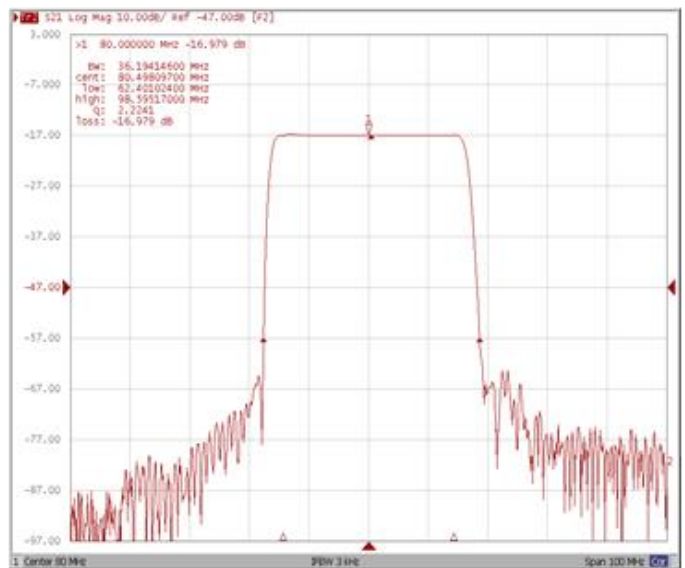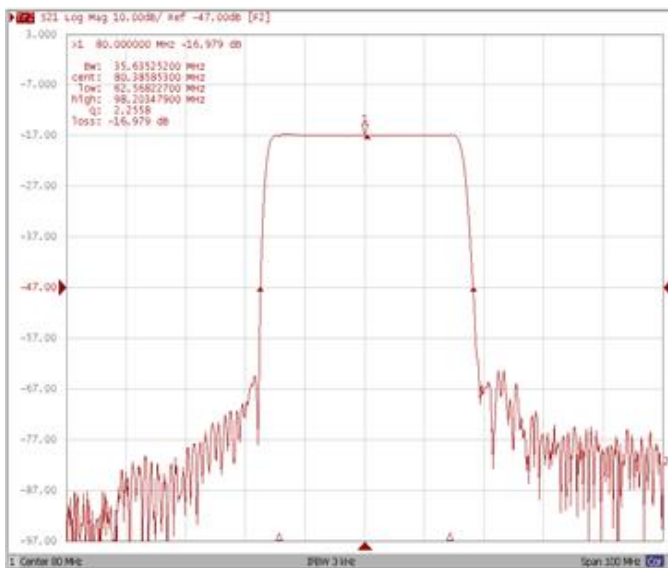

Frequency Response

Ripple Variation Fo±14.32MHz

Group Delay Variation Fo±14.32MHz

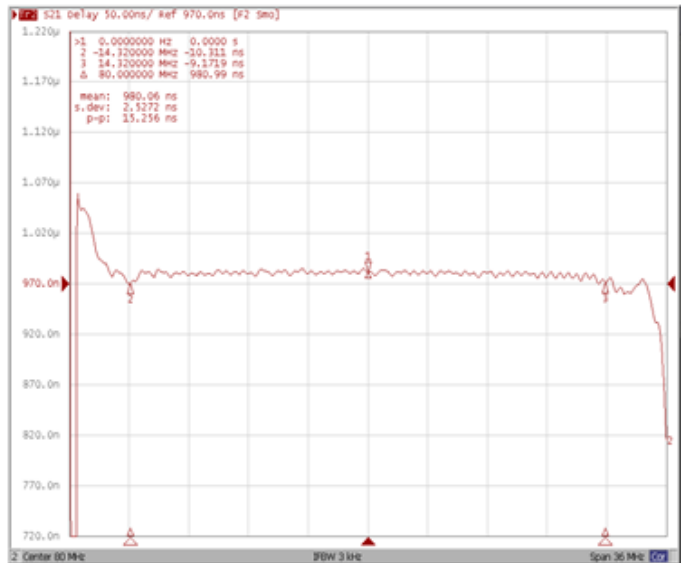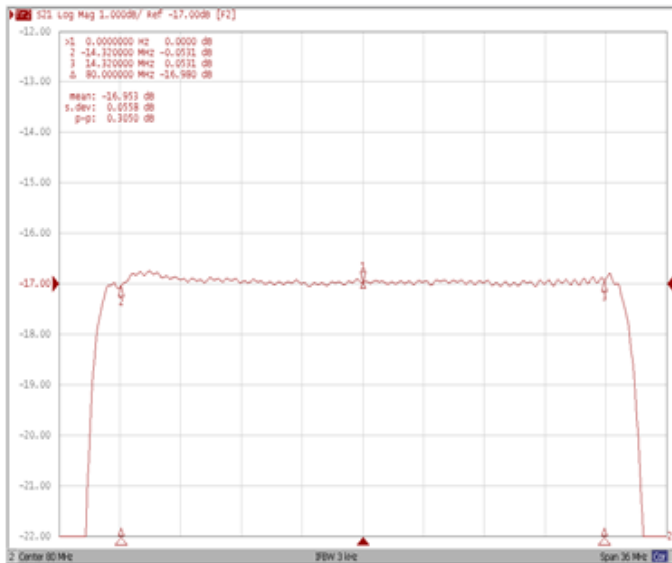

Smith Chart

VSWR

