

- Wireless, RF SAW Filter
- Revision 0: July 2009


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	-
Average Input Power	dBm	-	-	28
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	P			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.4

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	387.5	-
Insertion Loss within 385.0 ~ 390.0 MHz	dB	-	2.2	2.8
Amplitude Ripple within 385.0 ~ 390.0 MHz	dB _{p-p}	-	0.9	2.0
Attenuation:				
0.3MHz ~ 375.0MHz	dB	25	32	-
395.0MHz ~ 400.0MHz	dB	30	40	-
400.0MHz ~ 438.5MHz	dB	33	38	-
VSWR within 385.0 ~ 390.0 MHz	-	-	2.0	2.2

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

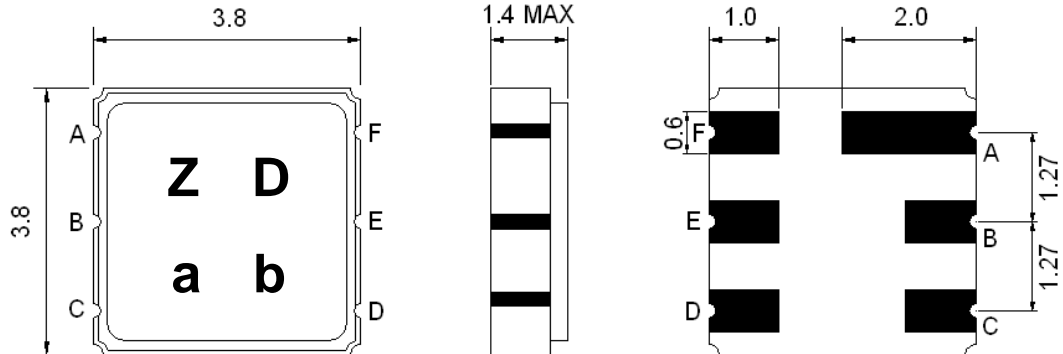

Marking Descriptions	
Z	Wireless Application
D	Series Number
a	Date Code (Year)
b	Date Code (Month)

Pin Description	
A, C, D, F	Ground
B	In
E	Out



Testing Environment

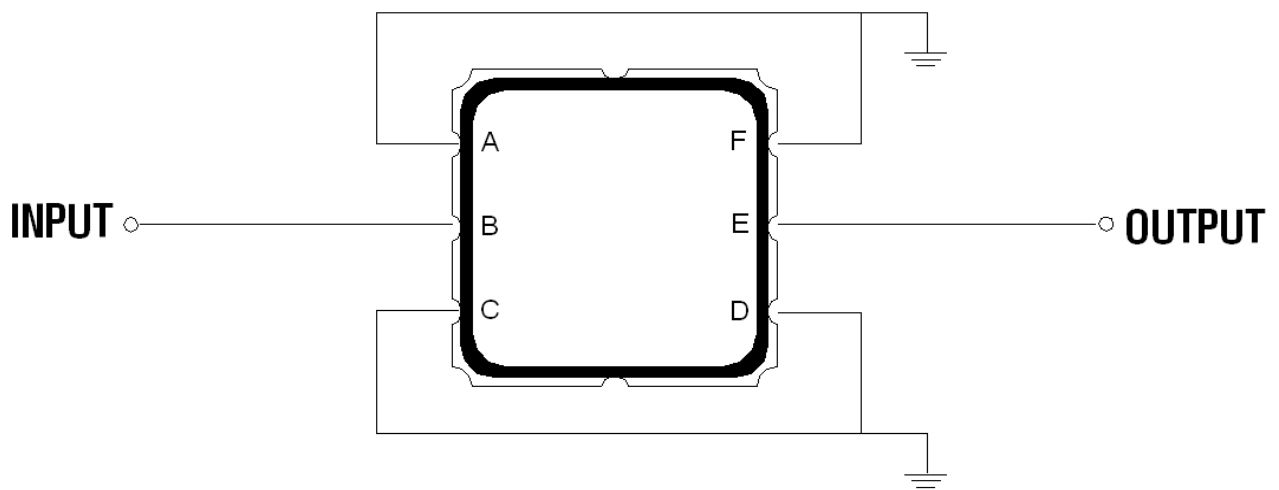



Source & Load Impedance: 50 Ω

Frequency Characteristics

Frequency Response

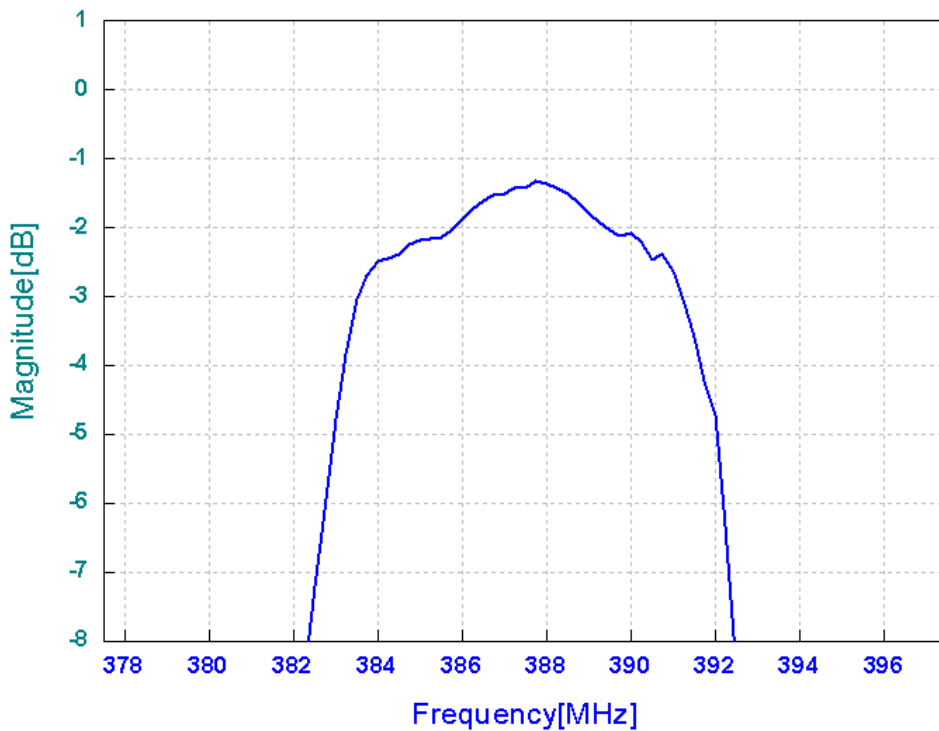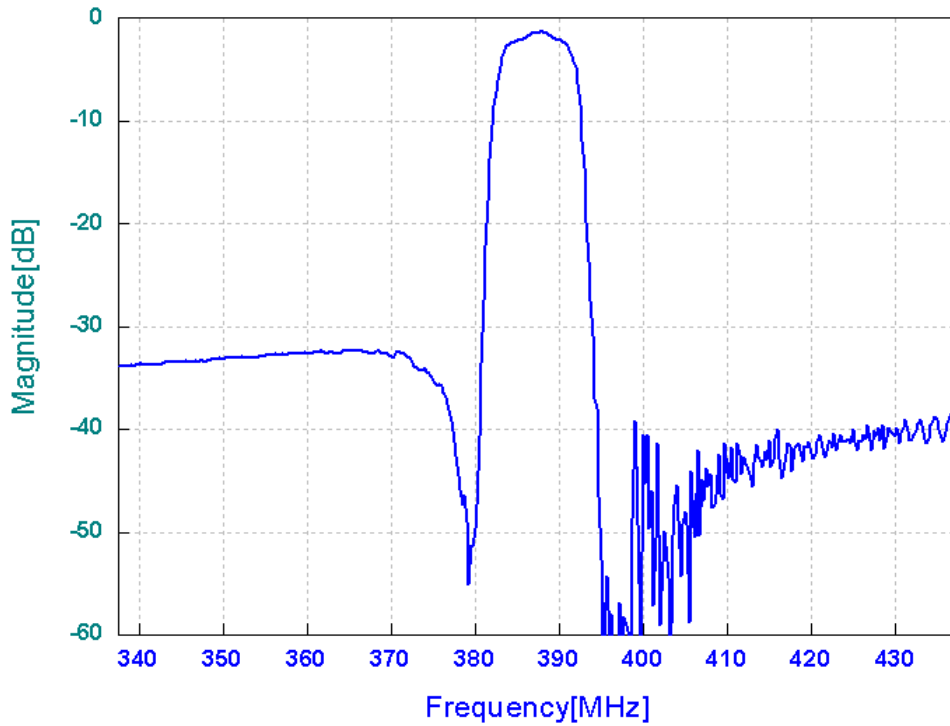

VSWR

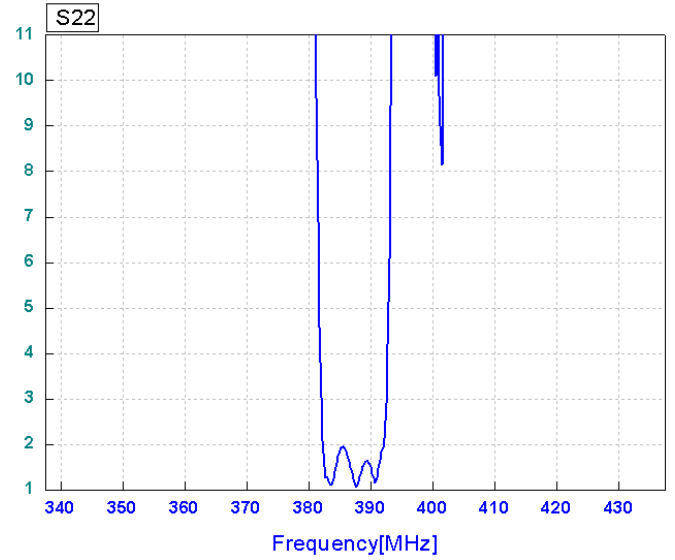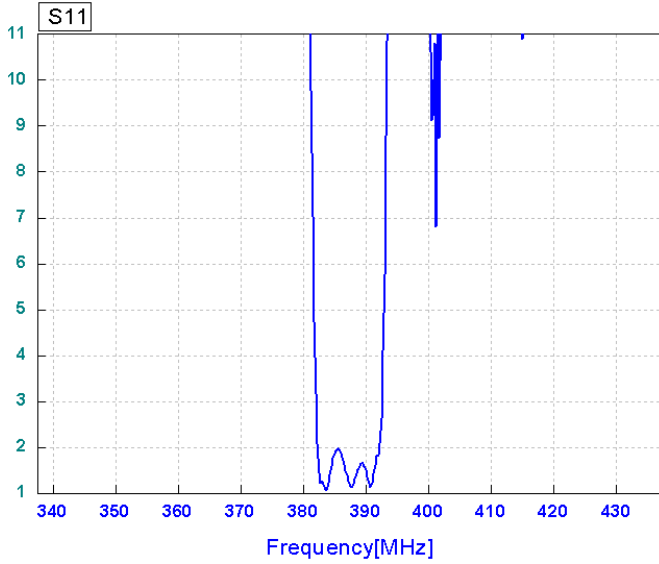

Smith Chart

