

- Wireless, RF SAW Filter
- Revision 0: November 2013


## Electrical Characteristics

MAXIMUM RATINGS				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	S20			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	2332.5	-
Insertion Loss within 2320.0 ~ 2345.0 MHz	dB	-	1.3	2.5
Amplitude Ripple within 2320.0 ~ 2345.0 MHz	dB <sub>p-p</sub>	-	0.2	1.0
<b>Attenuation:</b>				
2100.0 MHz	dB	35	47	-
2400.0 MHz	dB	35	53	-
VSWR within 2320.0 ~ 2345.0 MHz	-	-	1.5	2.0

**Notes:** (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


## Package Dimensions

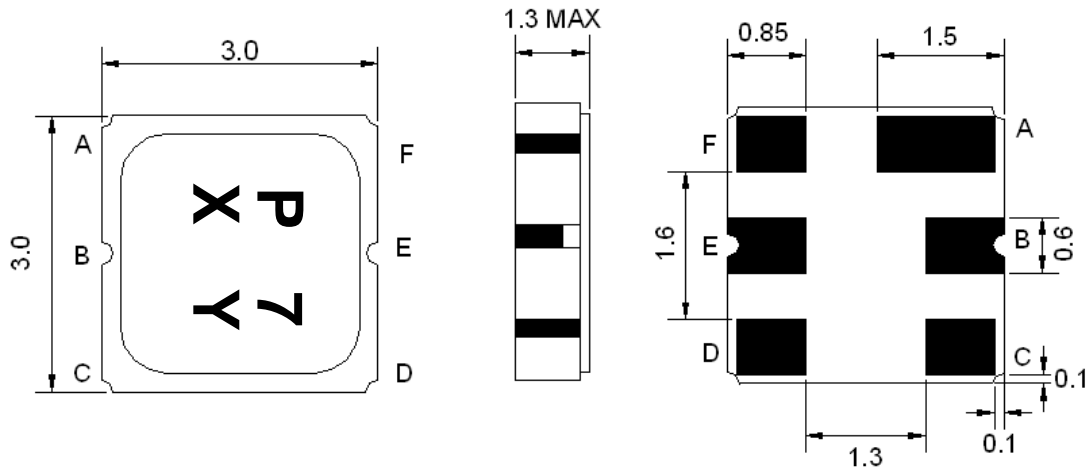

Marking Descriptions	
P	Wireless Application
7	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In



## Testing Environment

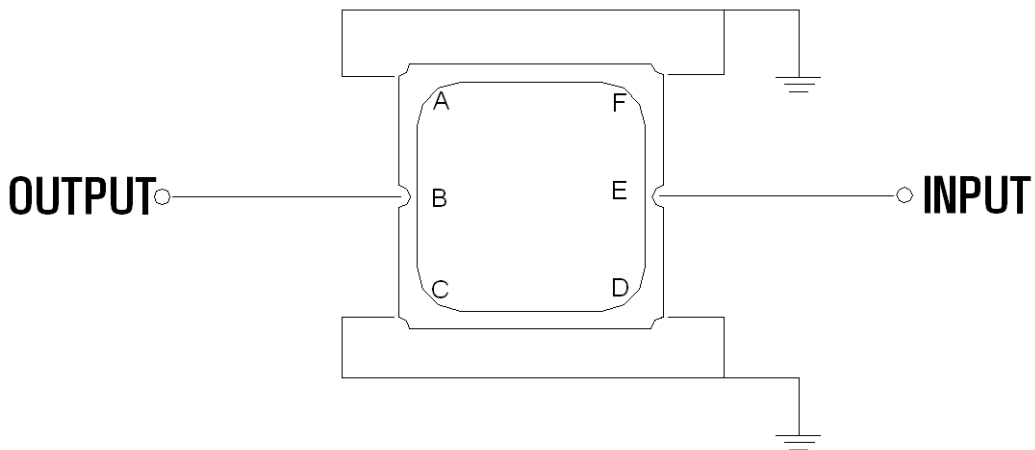



Source & Load Impedance: 50  $\Omega$

**Frequency Characteristics**

**Frequency Response**

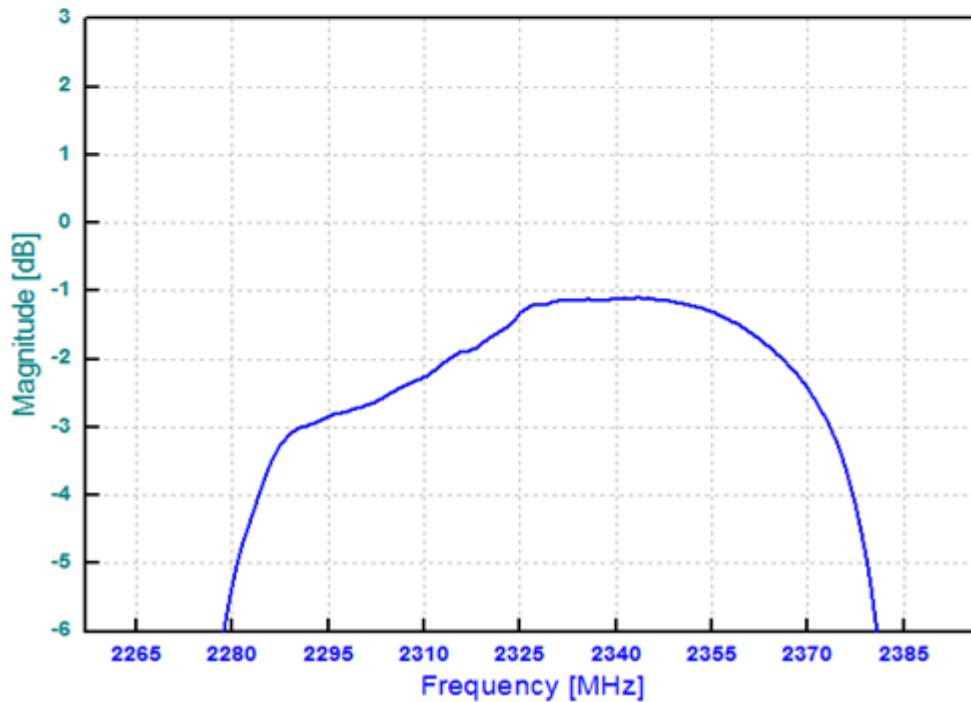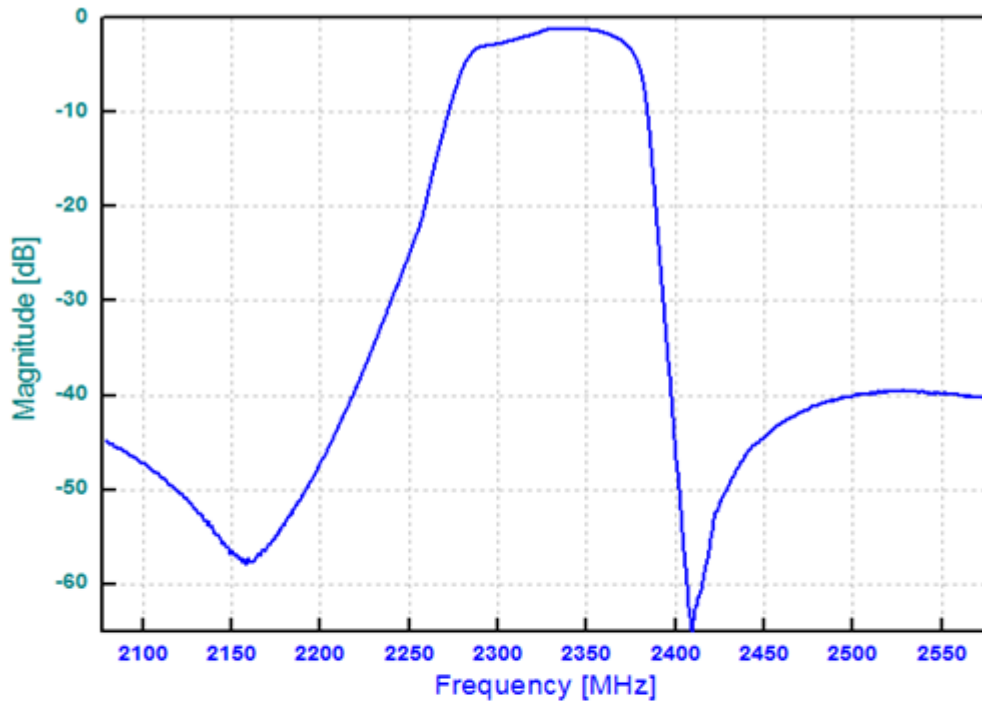

**VSWR**

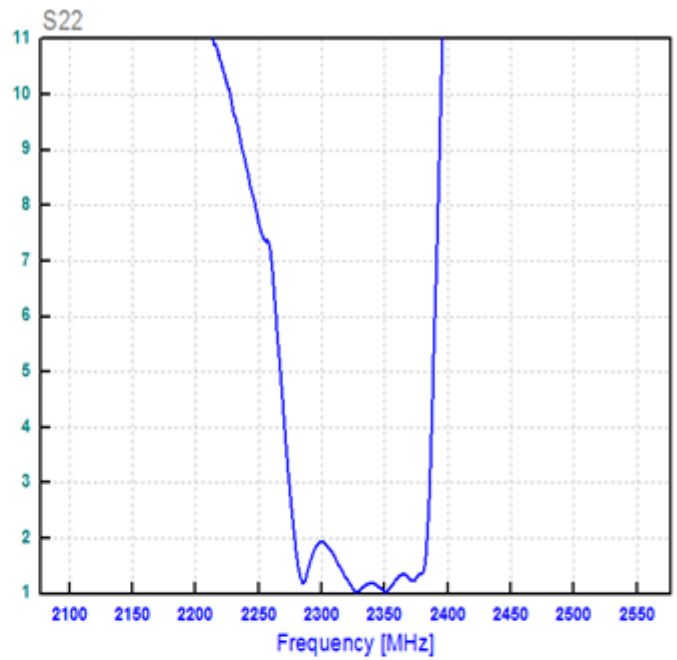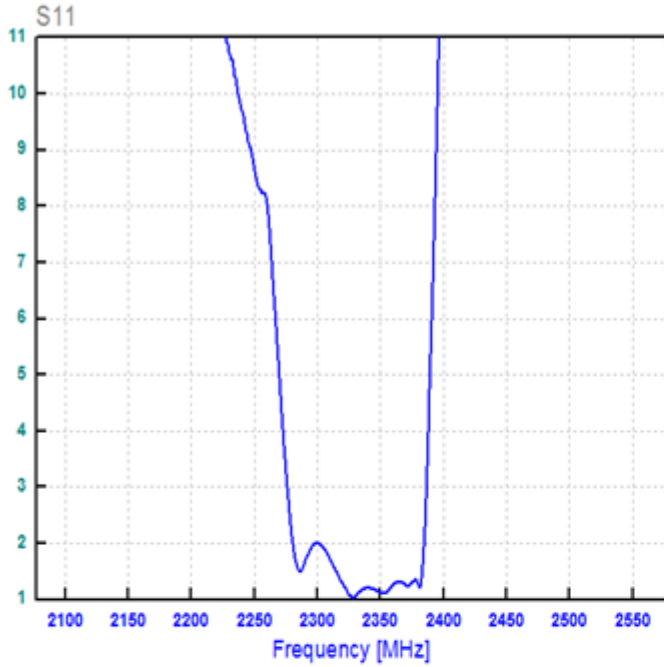

**Smith Chart**

