

- Wireless, RF SAW Filter
- Revision 0: September 2012


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	1026.0	-
Insertion Loss within 1023.0 ~ 1029.0 MHz	dB	-	2.5	3.5
Amplitude Ripple within 1023.0 ~ 1029.0 MHz	dB _{p-p}	-	0.3	1.0
Attenuation:				
900.0 ~ 1000.0 MHz	dB	40	46	-
1050.0 ~ 1100.0 MHz	dB	40	50	-
VSWR within 1023.0 ~ 1029.0 MHz	-	-	1.4	2.0

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).

Package Dimensions


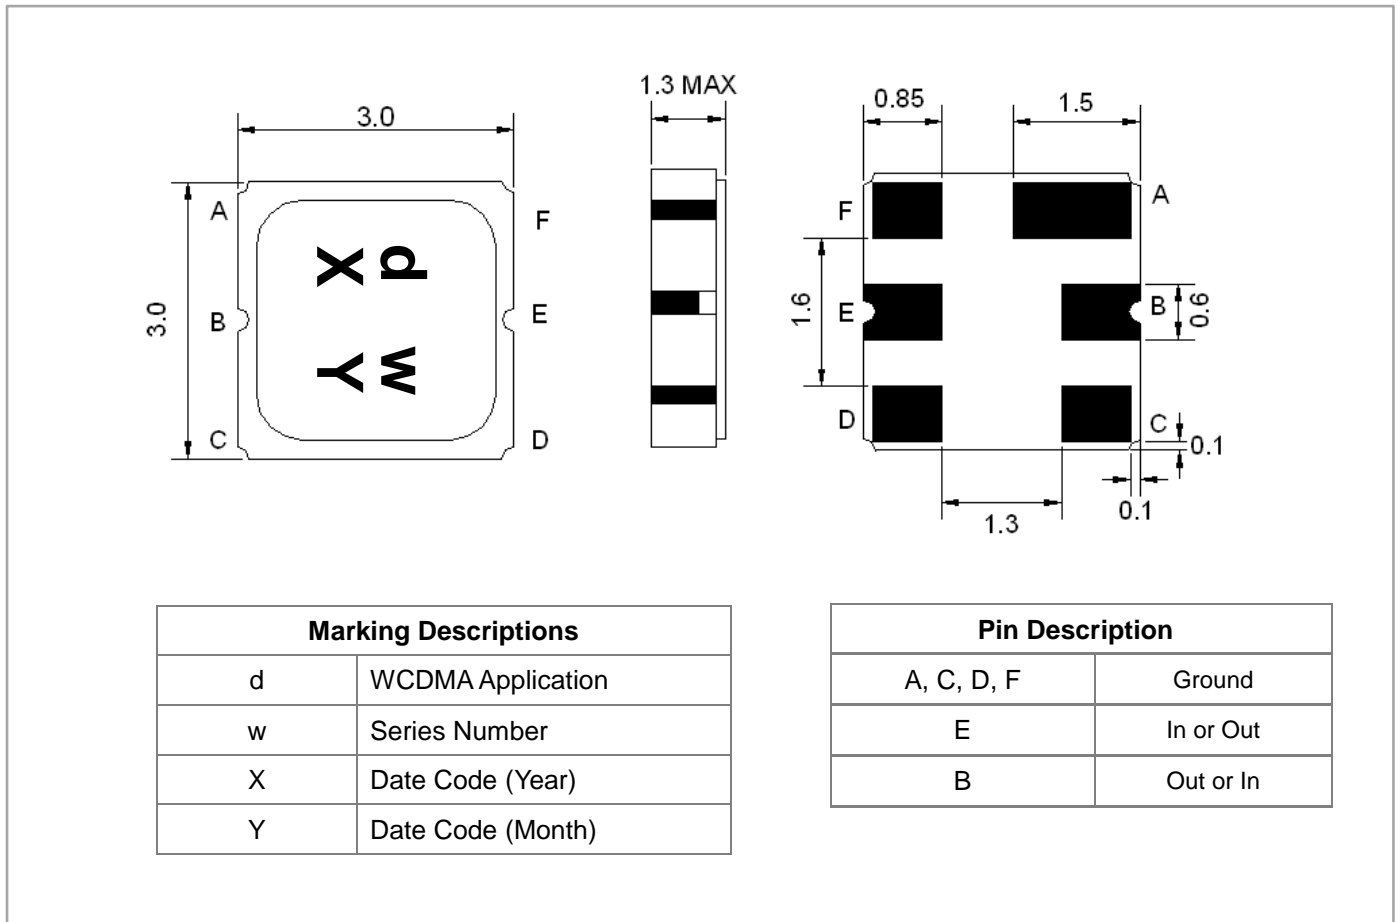


Testing Environment

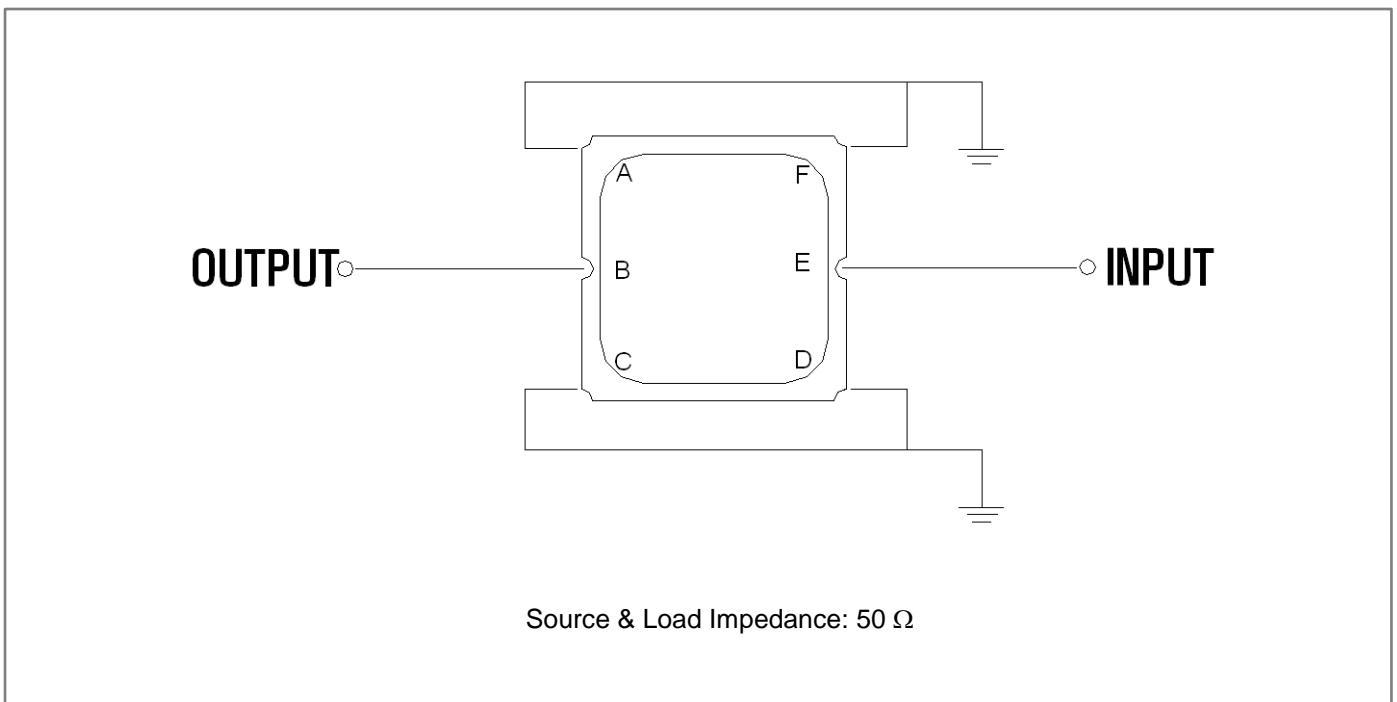


Frequency Characteristics

Frequency Response

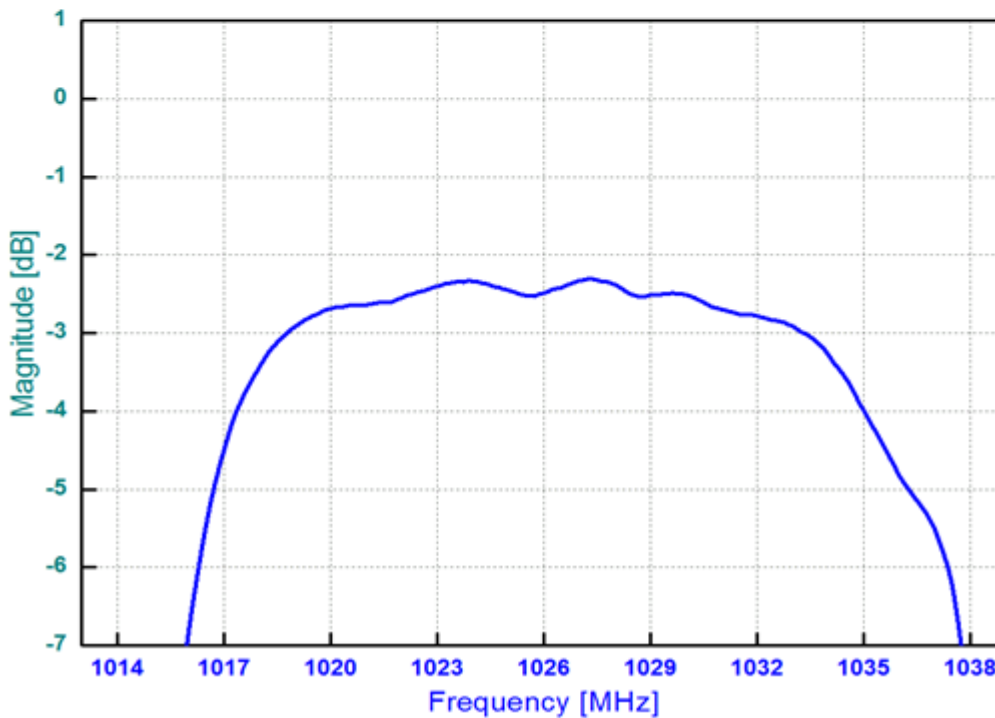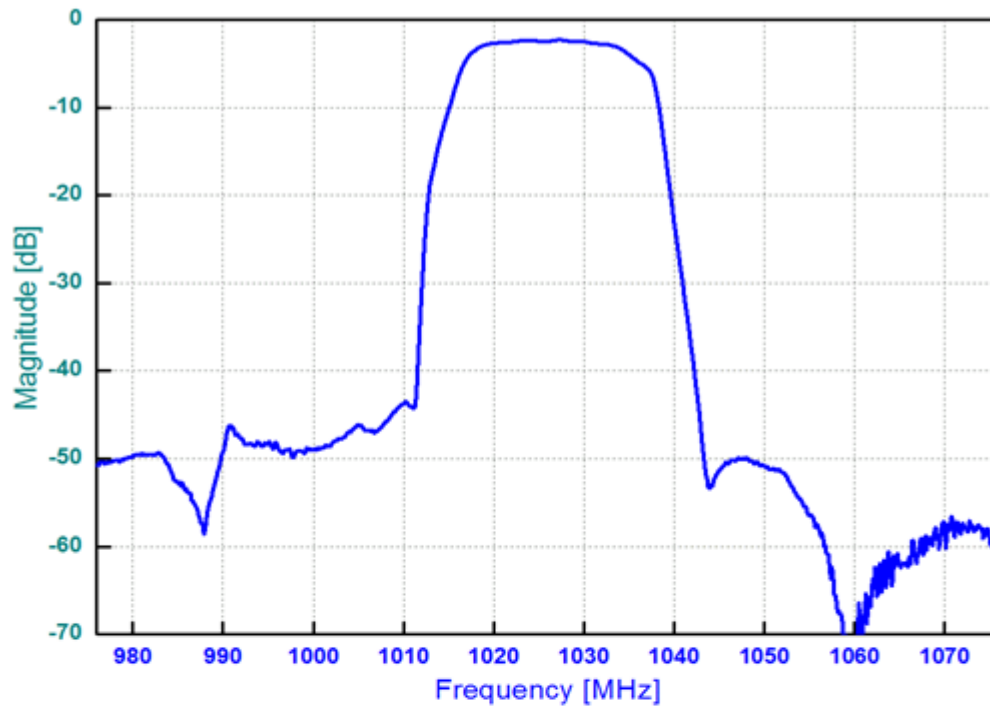

VSWR

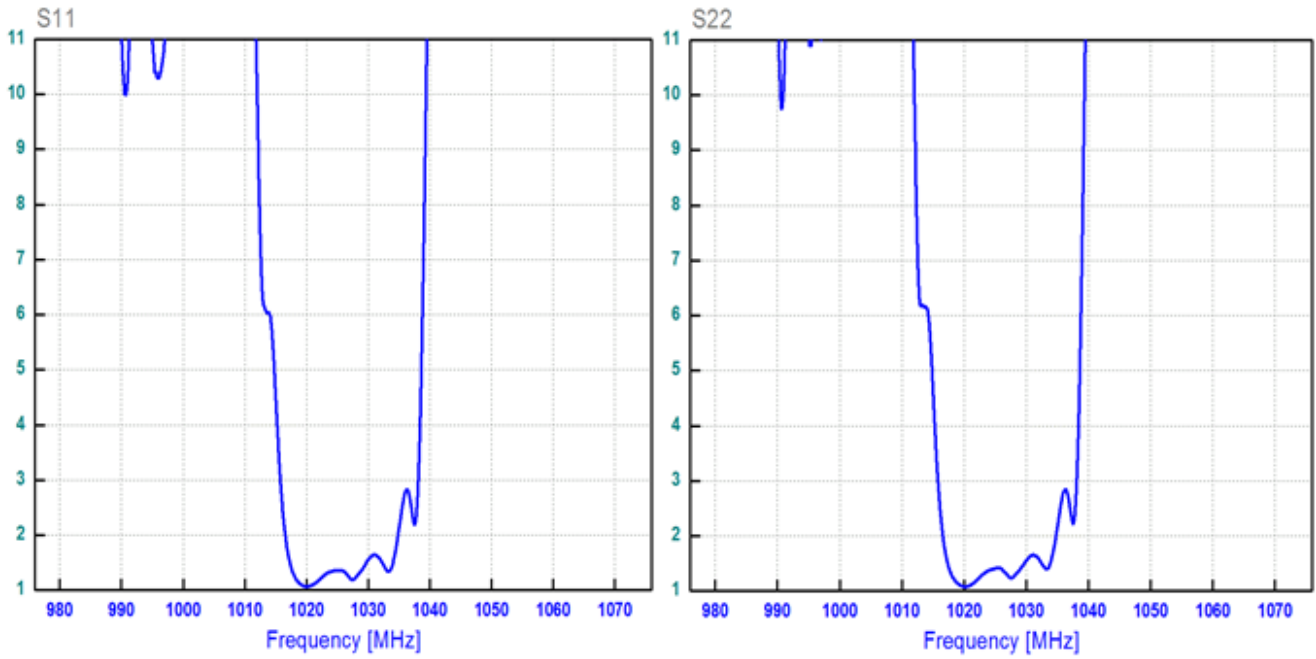

Smith Chart

