

- Wireless, RF SAW Filter
- Revision 0: December 2008


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	1695.0	-
Insertion Loss within 1665.0 ~ 1725.0 MHz	dB	-	2.9	3.3
Amplitude Ripple within 1665.0 ~ 1725.0 MHz	dB <sub>p-p</sub>	-	0.5	1.0
<b>Attenuation:</b>				
1300.0 ~ 1550.0 MHz	dB	25	28	-
1850.0 ~ 1915.0 MHz	dB	30	38	-
1915.0 ~ 2000.0 MHz	dB	25	33	-
VSWR within 1665.0~1725.0 MHz	-	-	1.3	2.0

**Notes:** (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


## Package Dimensions

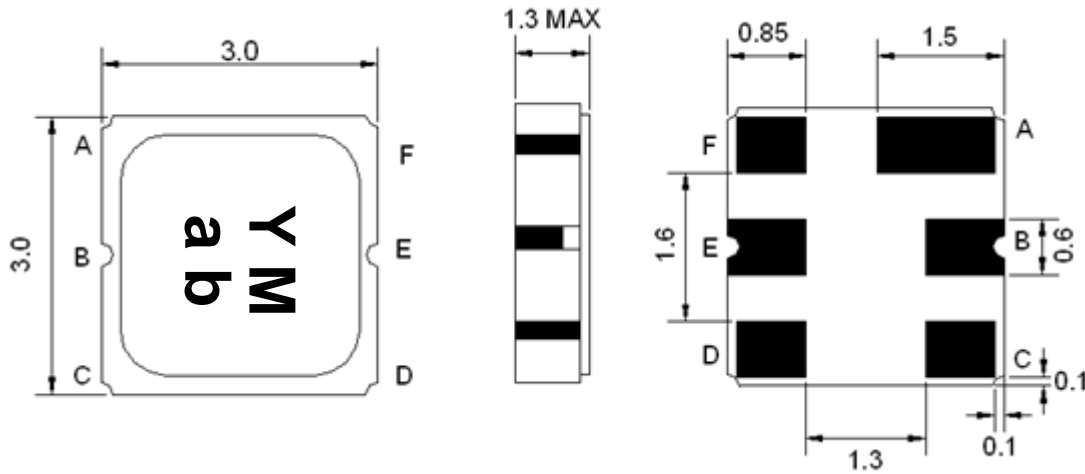

Marking Descriptions	
Y	Wireless Application
M	Series Number
a	Date Code (Year)
b	Date Code (Month)


Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In

## Testing Environment


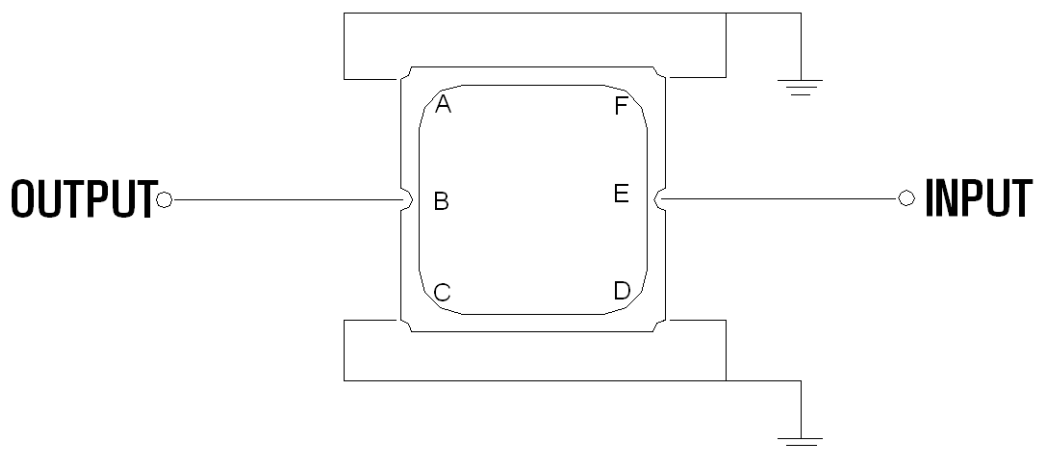


Source & Load Impedance: 50 Ω

## Frequency Characteristics

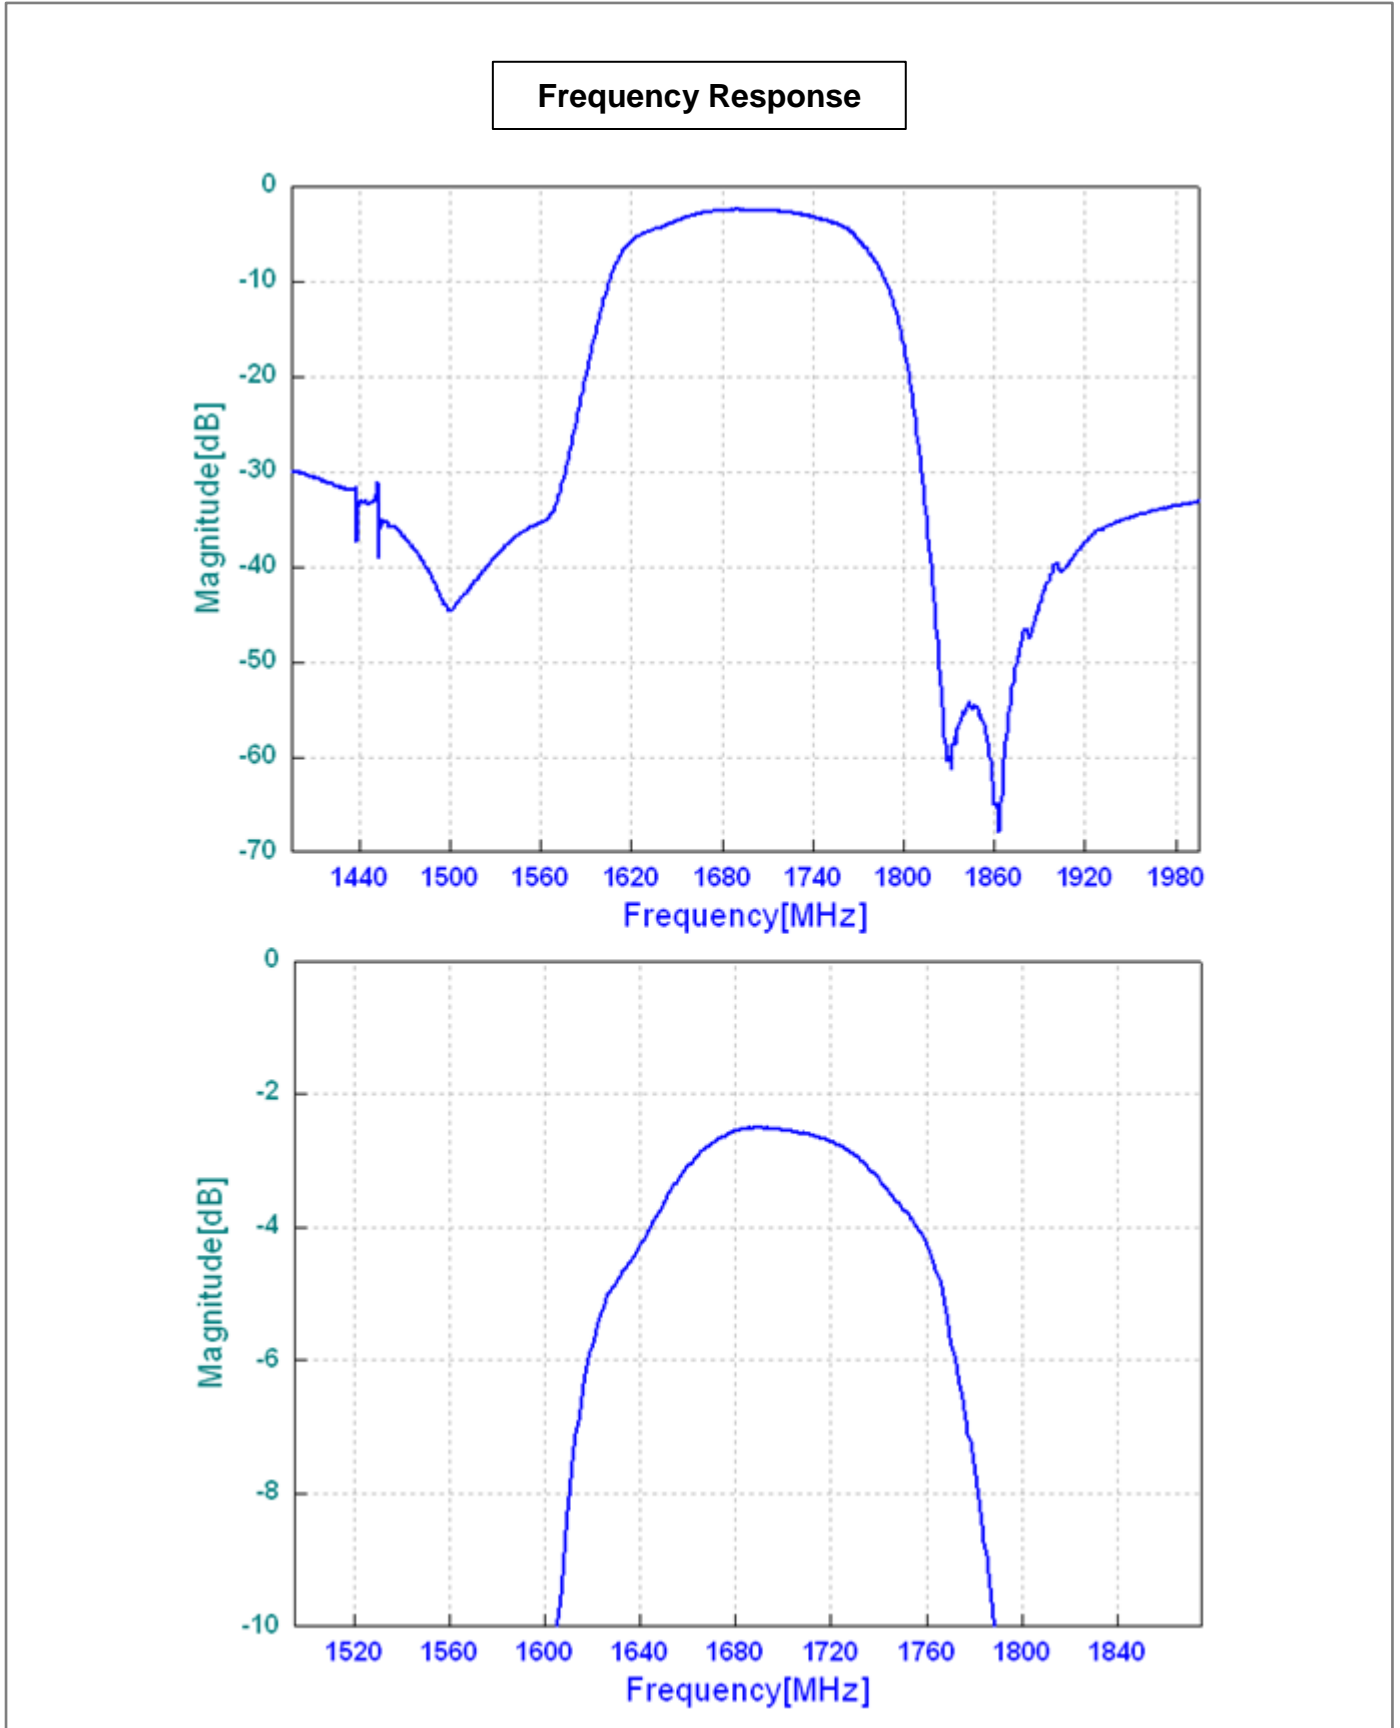

## VSWR

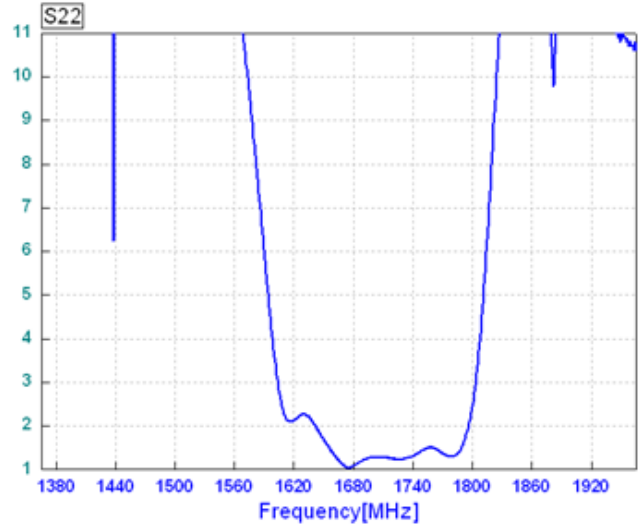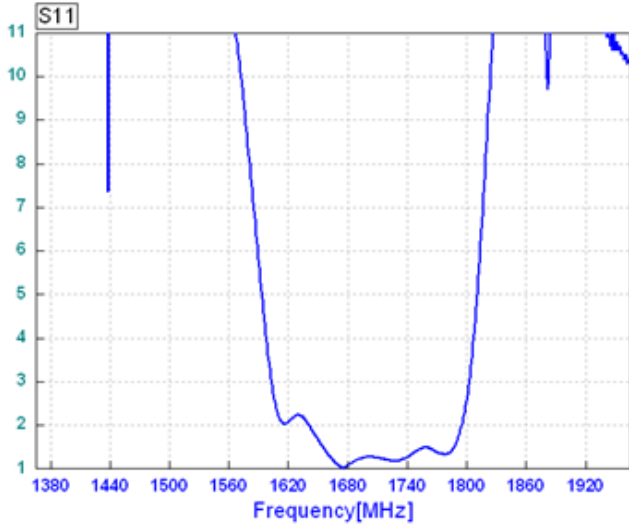

## Smith Chart

