

- Wireless, RF SAW Filter
- Revision 0: August 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+70
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	K			
Length x Width	mm ²	-	5.0 x 5.0	-
Height	mm	-	-	1.4

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	170.0	-
Insertion Loss within 169.7~170.3 MHz	dB	-	1.5	3.5
Amplitude Ripple within 169.7~170.3 MHz	dB _{p-p}	-	0.4	1.5
Attenuation:				
D.C ~ Fo -10.7MHz	dB	40	50	-
F0 +10.7MHz ~ 1000.0MHz	dB	30	40	-
VSWR within 169.7~170.3 MHz	-	-	1.4	2.0

Notes : (1) No Matching Network .


Package Dimensions

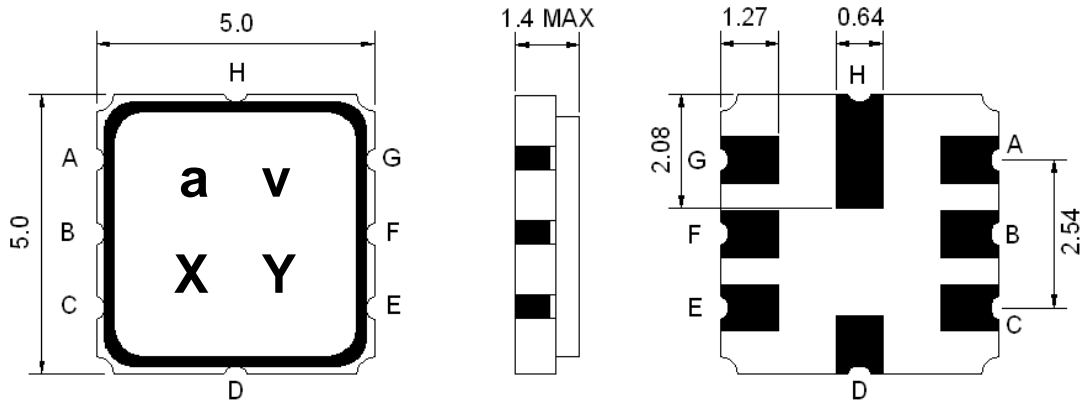

Marking Descriptions	
a	Wireless Application
v	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, E, G, H	Ground
B	In
F	Out

Testing Environment


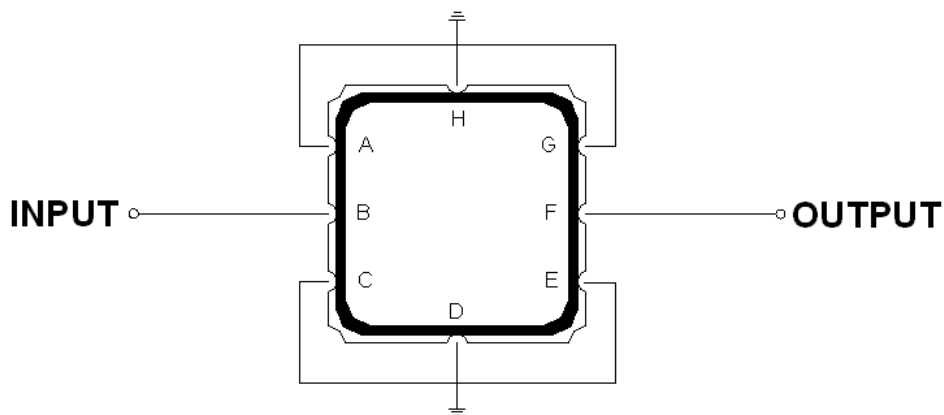


Source & Load Impedance: 50 Ω

Frequency Characteristics

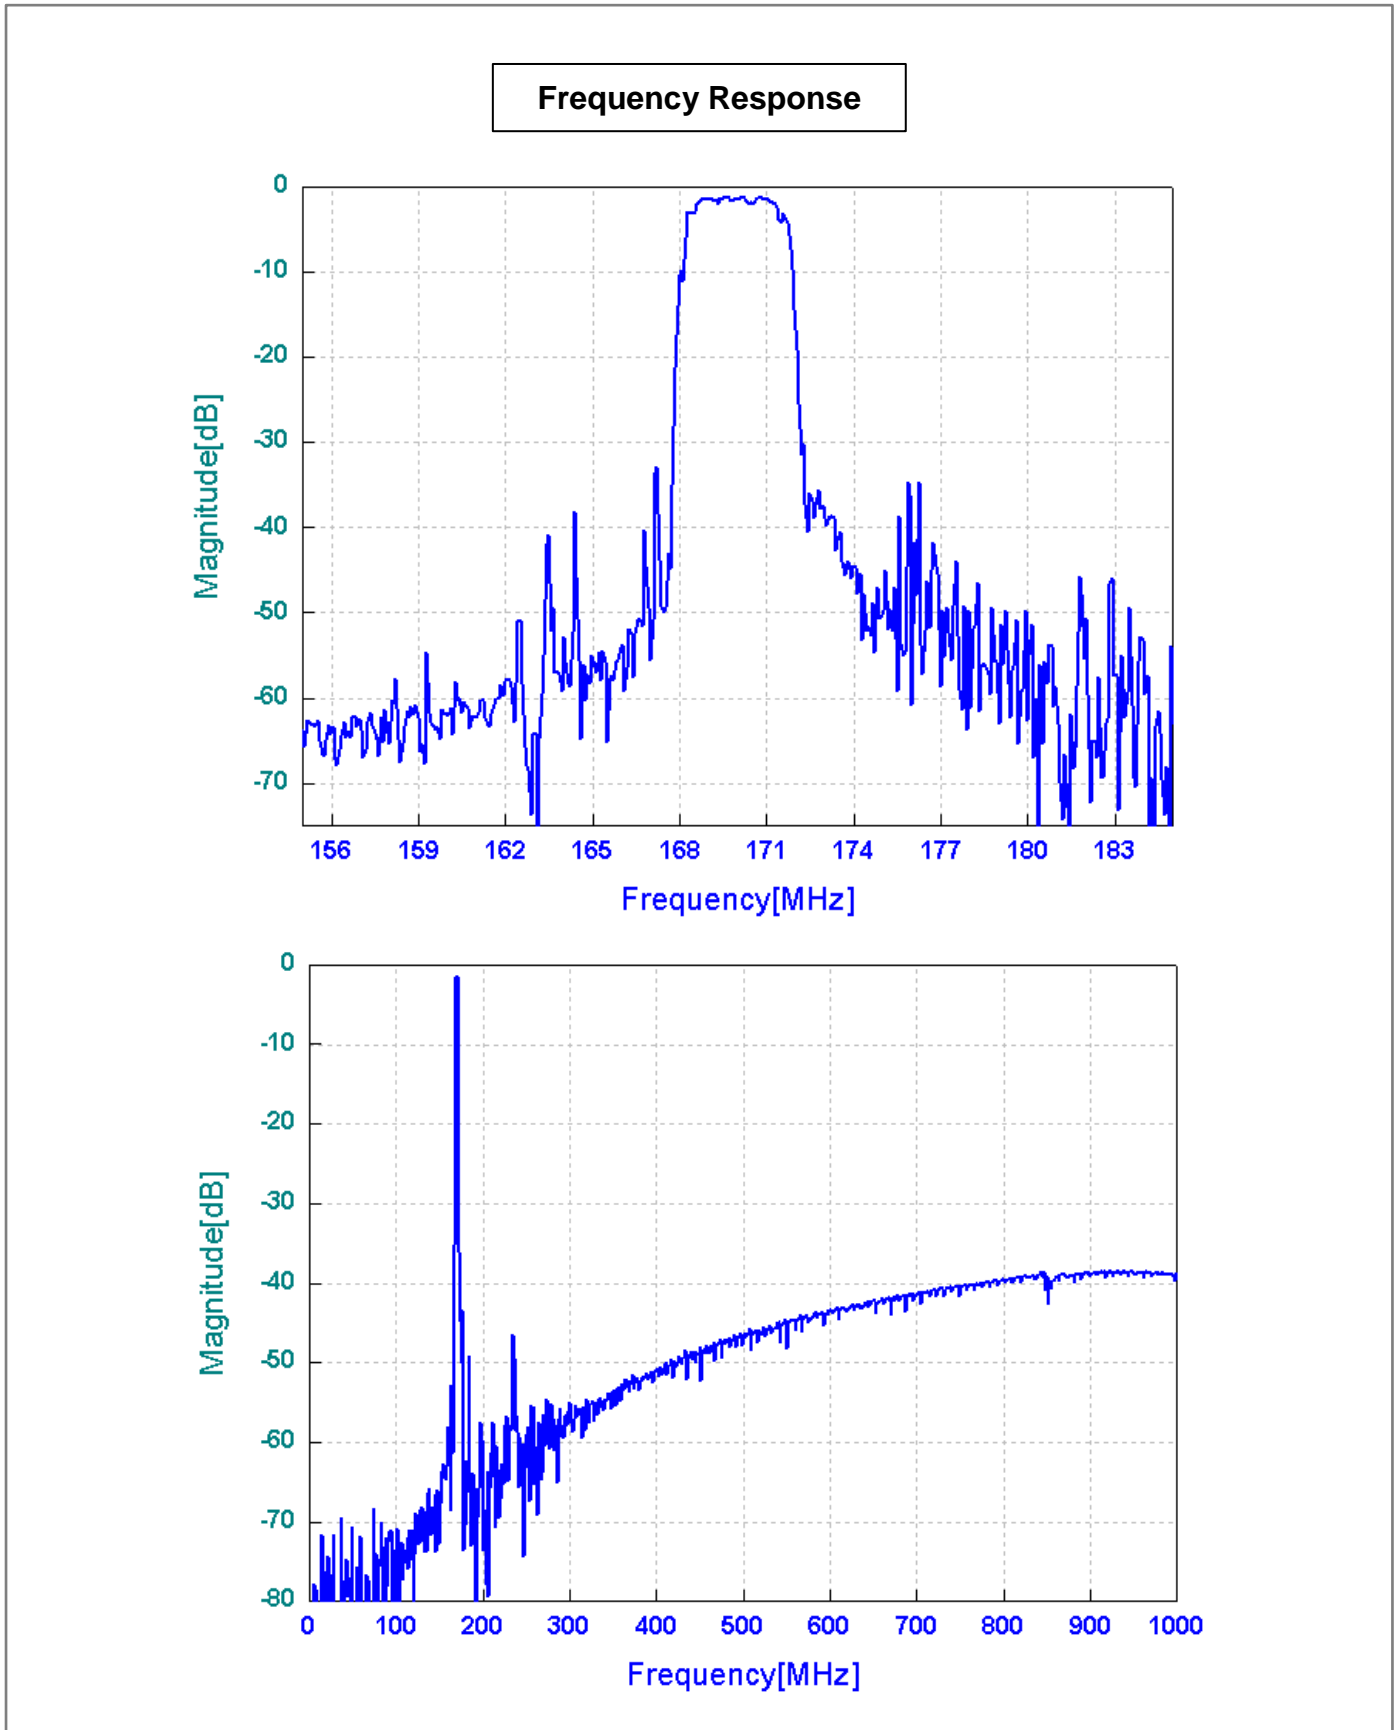

VSWR

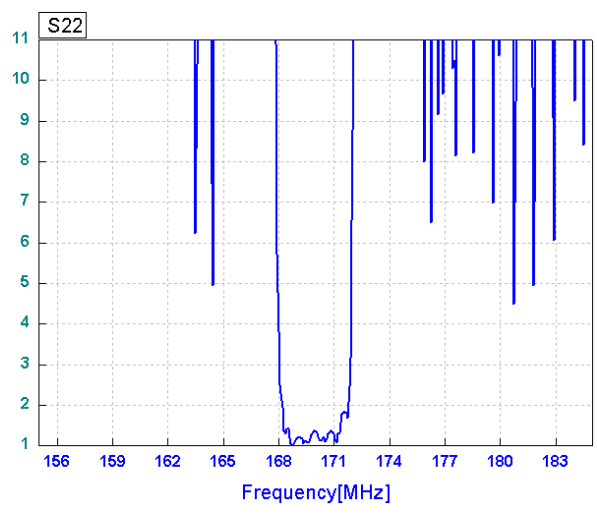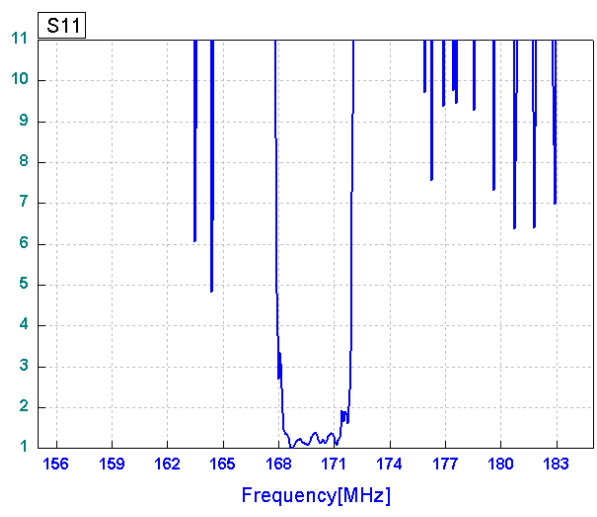

Smith Chart

