

- WCDMA, RF-Tx SAW Filter
- Revision 1: July 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	7.5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	1950	-
Insertion Loss within 1920 ~ 1980 MHz	dB	-	2.8	4.0
Amplitude Ripple within 1920 ~1980 MHz	dB _{p-p}	-	1.4	2.4
Attenuation:				
D.C. ~ 1840 MHz	dB	20	31	-
1840 ~ 1900 MHz	dB	10	17	-
2000 ~ 2030 MHz	dB	4.5	9	-
2030 ~ 2060 MHz	dB	20	50	-
2060 ~ 5000 MHz	dB	22	26	-
VSWR within 1920 ~ 1980 MHz	-	-	1.9	2.4

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

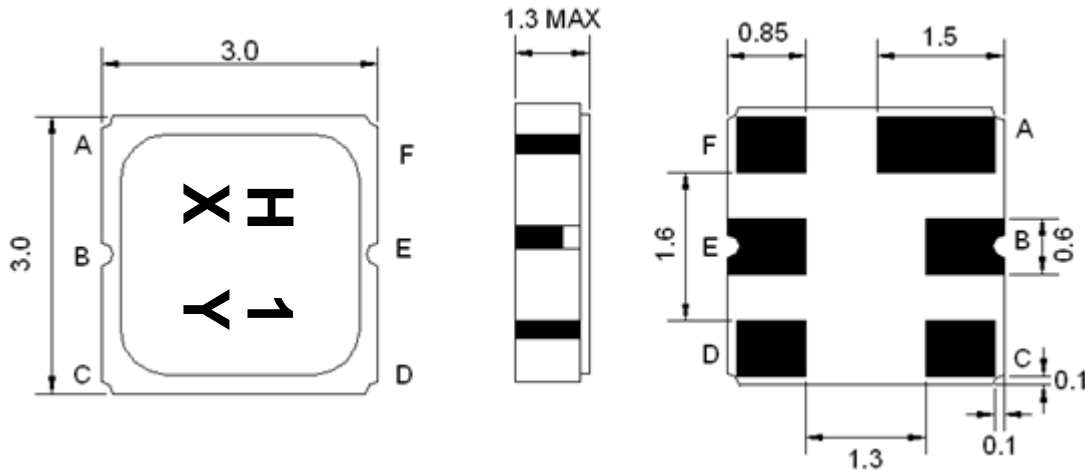

Marking Descriptions	
H	WCDMA Application
1	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, F	Ground
E	In
B	Out



Testing Environment

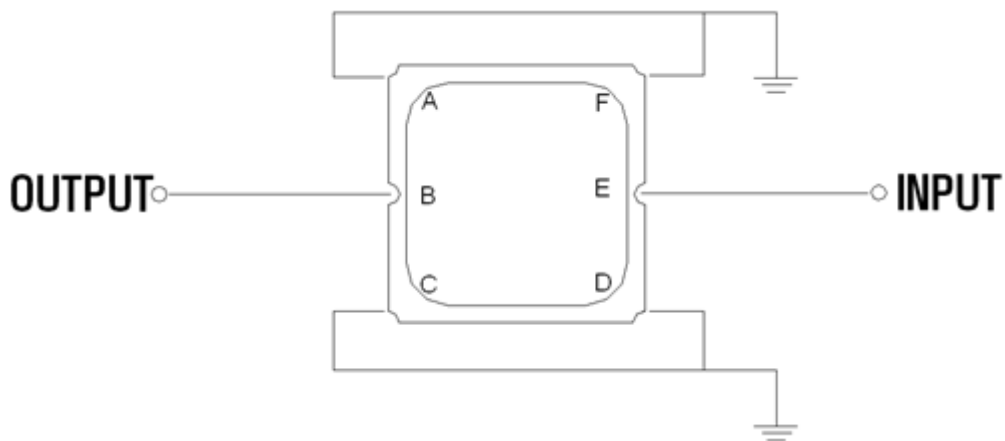



Source & Load Impedance: 50 Ω

Frequency Characteristics

Frequency Response

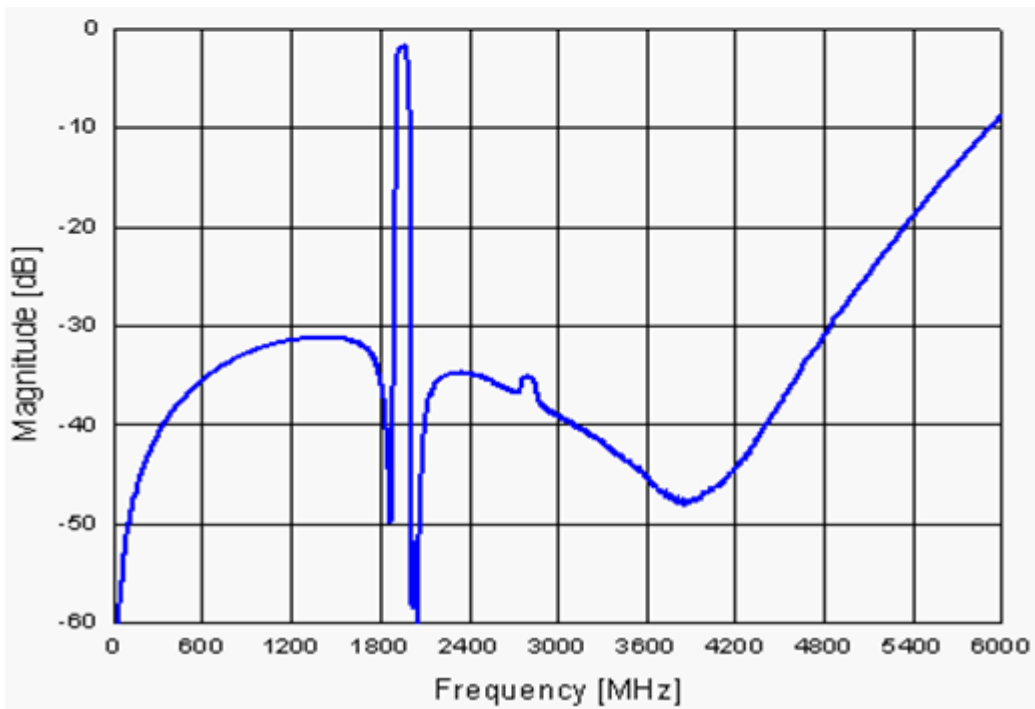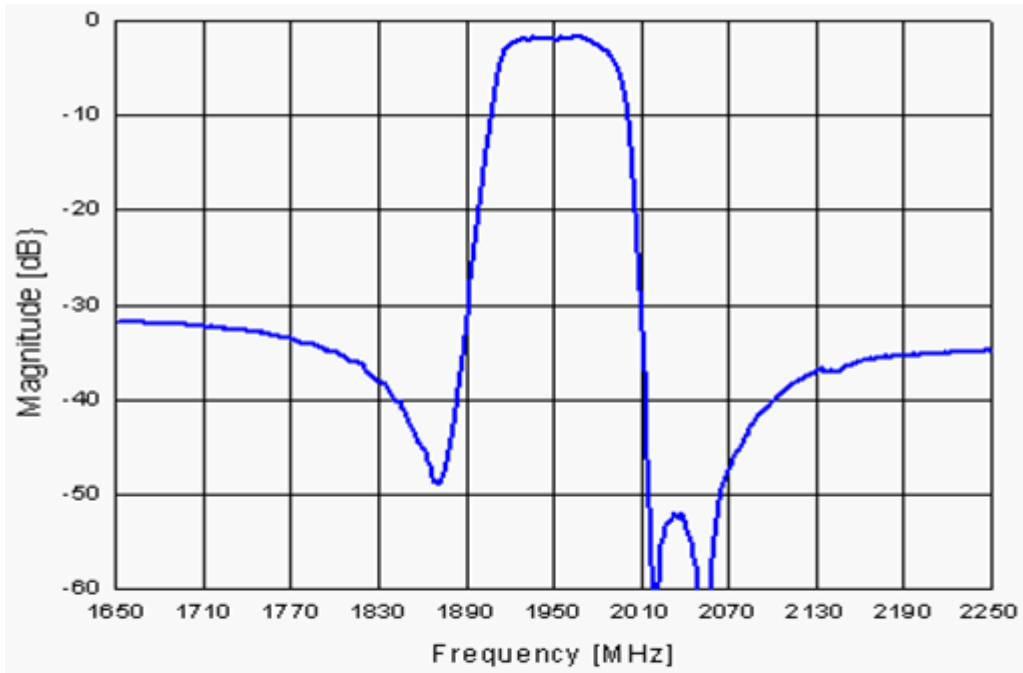

VSWR

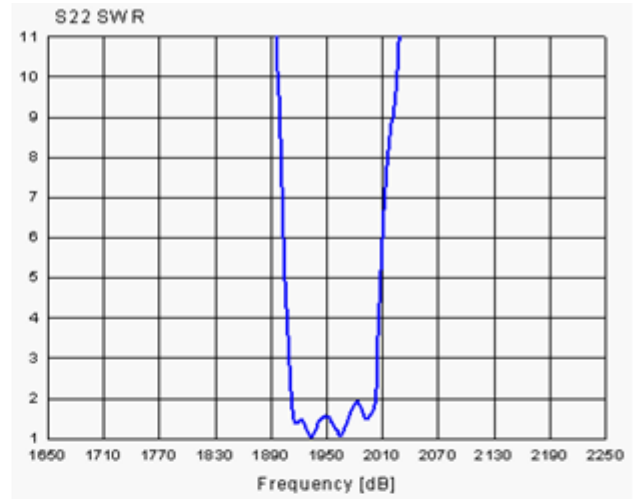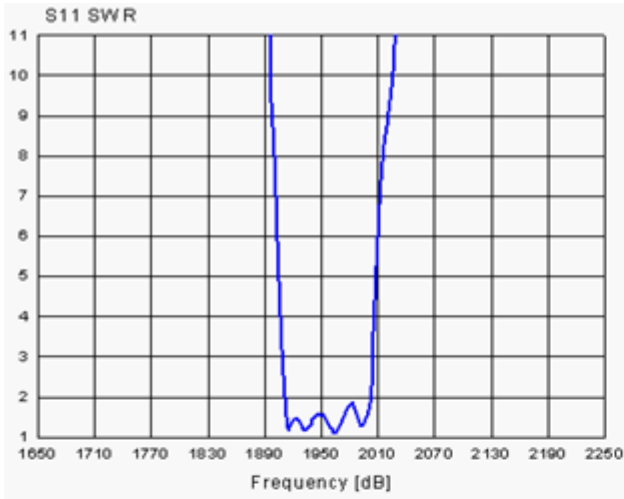

Smith Chart

