

- WIMAX, RF SAW Filter
- Revision 0: October 2010


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	2345.0	-
Insertion Loss within 2330.0 ~ 2360.0 MHz	dB	-	2.2	3.5
Amplitude Ripple within 2330.0 ~ 2360.0 MHz	dB _{p-p}	-	0.7	1.5
Return Loss within 2330.0 ~ 2360.0 MHz	dB	8	12	-
Attenuation:				
800.0 ~ 1900.0 MHz	dB	28	35	-
1920.0 ~ 1980.0 MHz (WCDMA UL)	dB	30	38	-
2110.0 ~ 2170.0 MHz (WCDMA DL)	dB	35	45	-
2400.0 ~ 2420.0 MHz	dB	4	8	-
2420.0 ~ 2497.0 MHz	dB	35	44	-
2nd Harmonic (4690.0 MHz)	dB	20	32	-
3rd Harmonic (7035.0 MHz)	dB	1	3	-

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

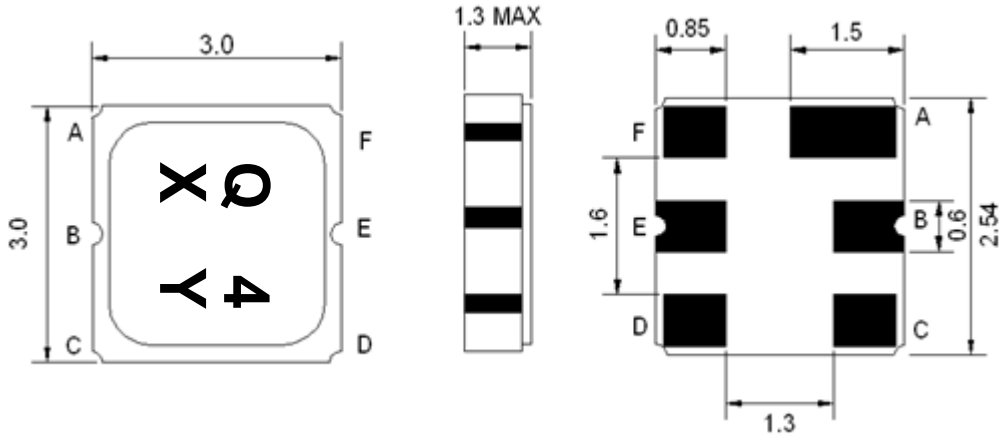

Marking Descriptions	
Q	WiMAX Application
4	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In

Testing Environment


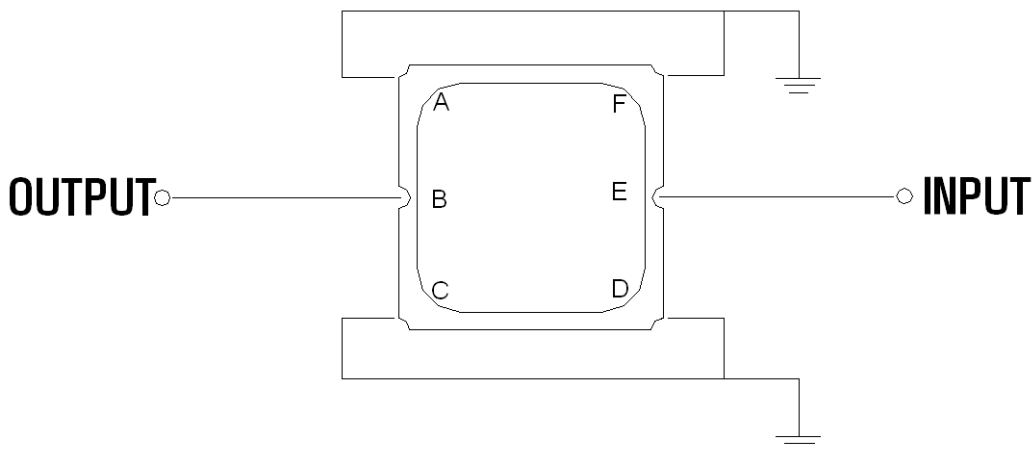


Source & Load Impedance: 50 Ω

Frequency Characteristics

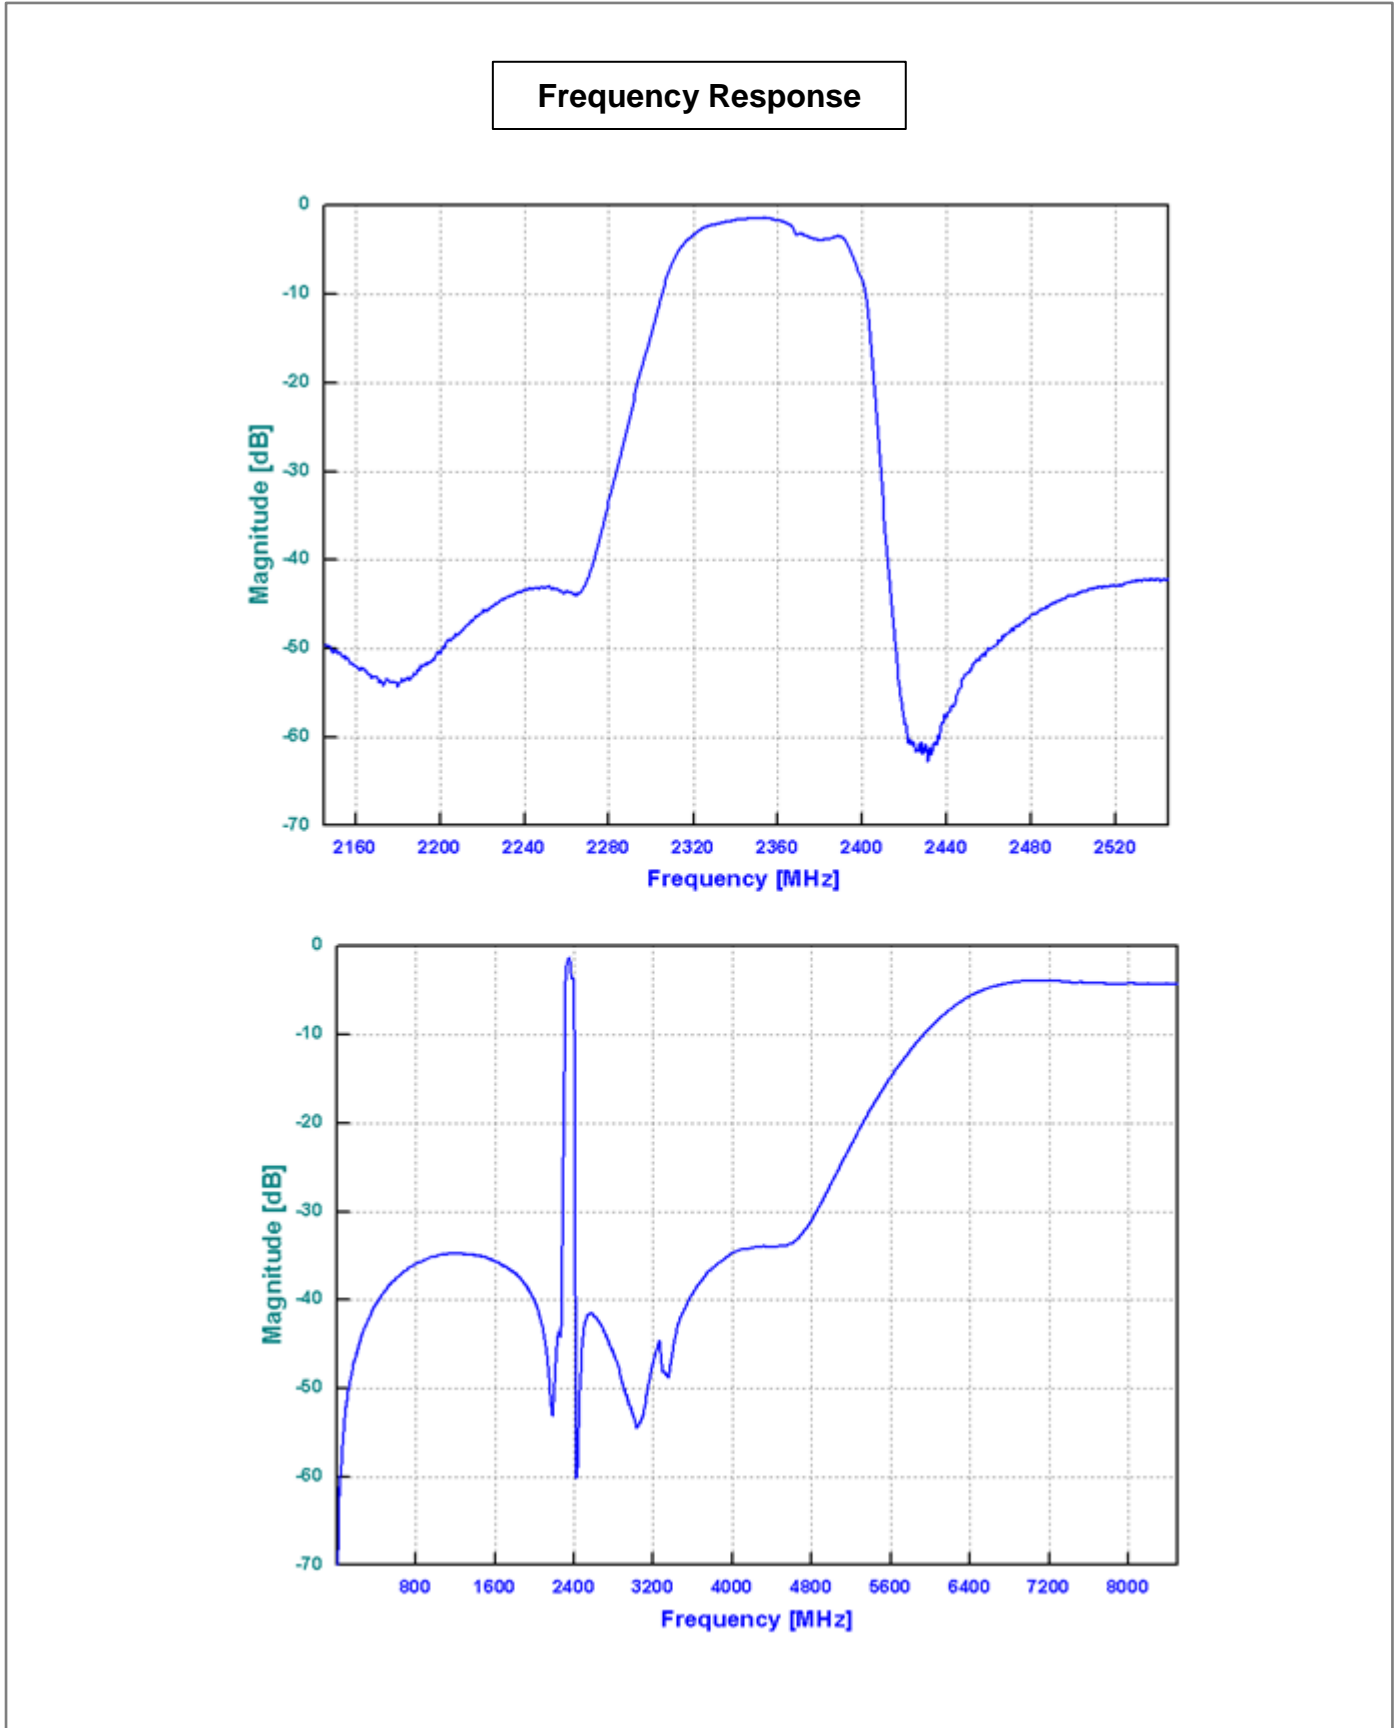

Return Loss

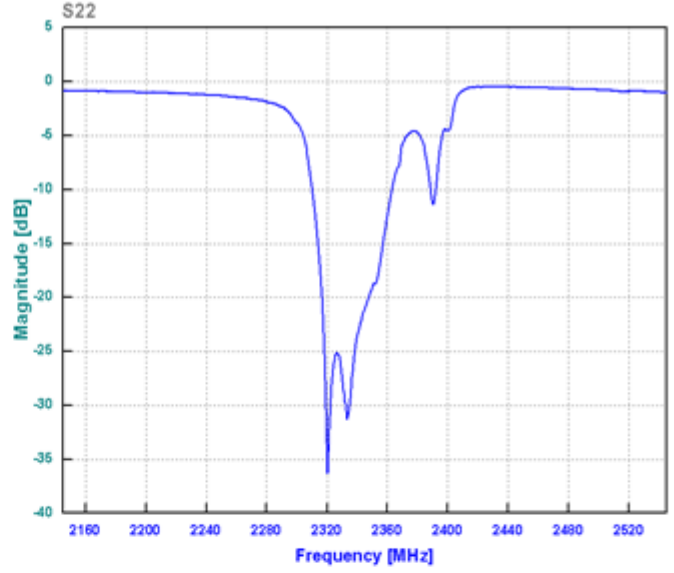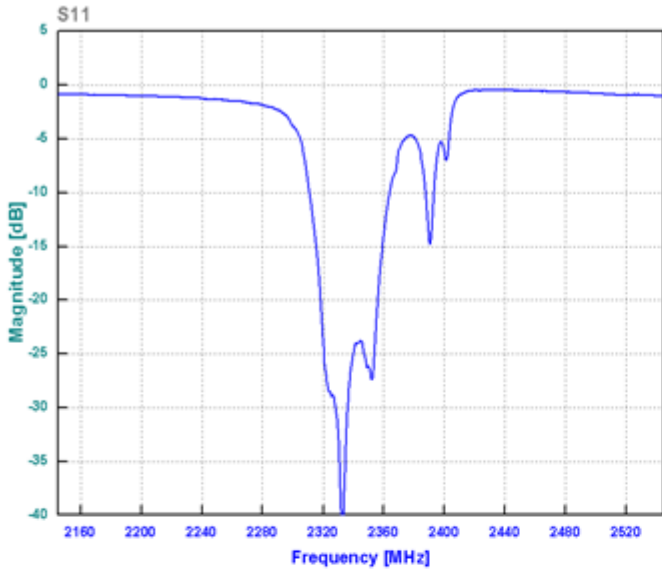

Smith Chart

