

- Wireless, RF SAW Filter
- Revision 0: July 2004


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-10	-	+60
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	0
Source Impedance (single ended) ⁽¹⁾	Ω	-	150	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	150	-
Package type & size	K			
Length x Width	mm ²	-	5.0 x 5.0	-
Height	mm	-	-	1.4

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	250.0	-
Insertion Loss in 247.5 ~ 252.5 MHz	dB	-	3.0	4.0
Amplitude Ripple in 247.5 ~ 252.5 MHz	dB	-	1.5	2.5
Stop Band Attenuation:				
D.C ~ Fo-42.8 MHz	dB	50	55	-
Fo+40.0 ~ F+200.0 MHz	dB	50	55	-

Notes : (1) With Matching Network


Package Dimensions

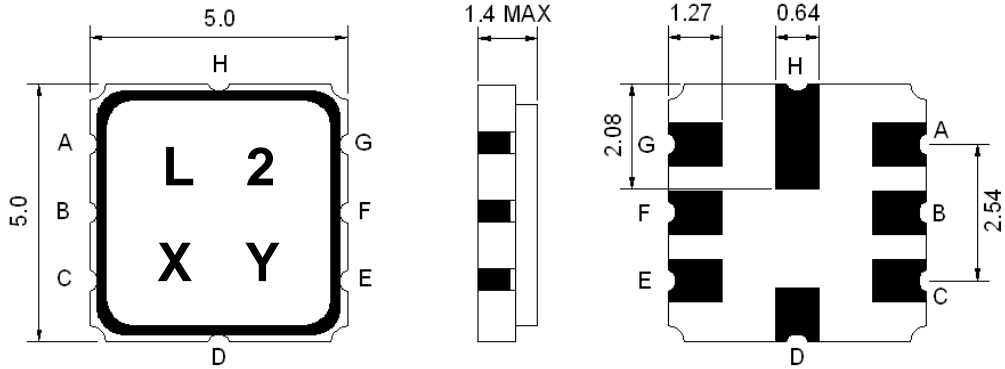

Marking Descriptions	
L	Wireless Application
2	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, E, G, H	Ground
B	In
F	Out

Testing Environment

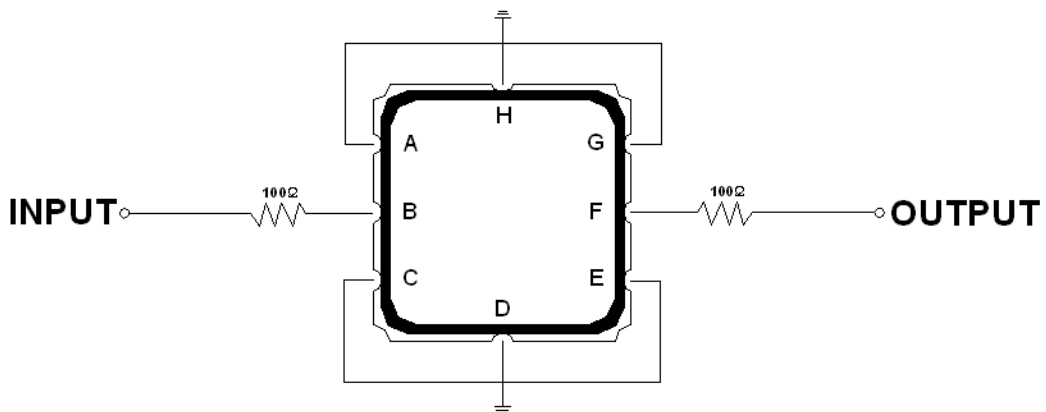

Source & Load Impedance: 50 Ω

Frequency Characteristics

Frequency Response

