

- CDMA 450 L-Band, RF-Tx SAW Filter
- Revision 0: April 2012


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	30
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M2			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	412.5	-
Insertion Loss in 410.0 ~415.0 MHz	dB	-	1.4	2.8
<b>Stop Band Attenuation:</b>				
0.3 ~ 400.0 MHz	dB	23	25	-
420.0 ~ 425.0 MHz	dB	30	40	-
425.0 ~ 1700.0 MHz	dB	20	25	-
1700.0 ~ 2000.0 MHz	dB	25	35	-
VSWR in 410.0 ~ 415.0 MHz	-	-	1.5	2.3

**Notes :** (1) No Matching Network.


## Package Dimensions

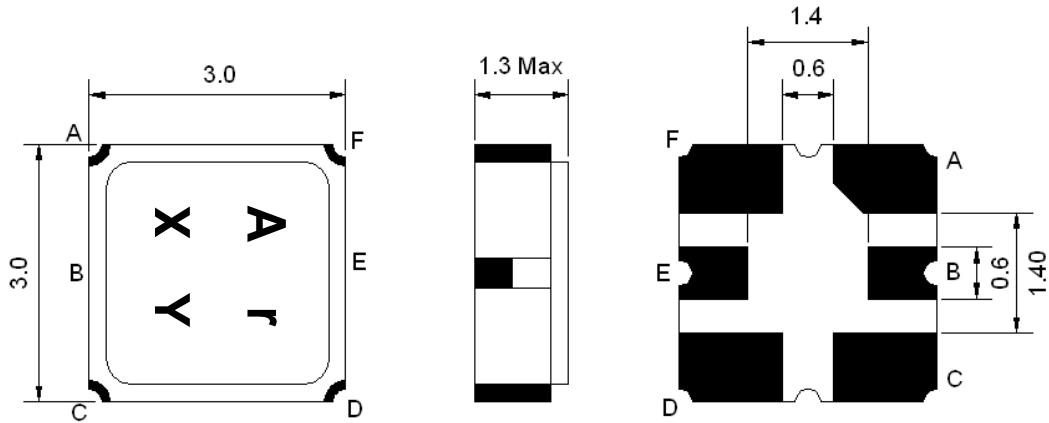

Marking Descriptions	
A	CDMA450 Application
r	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In

## Testing Environment


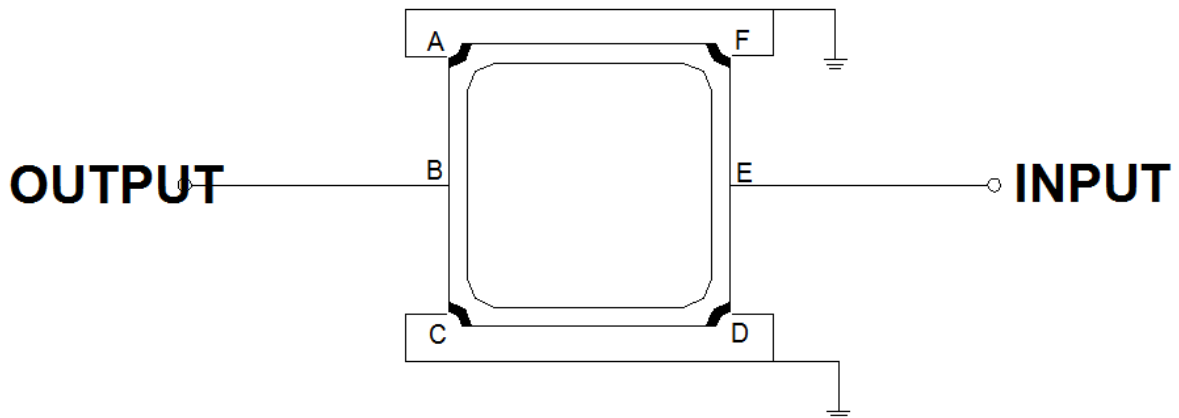


Source & Load Impedance: 50  $\Omega$

## Frequency Characteristics

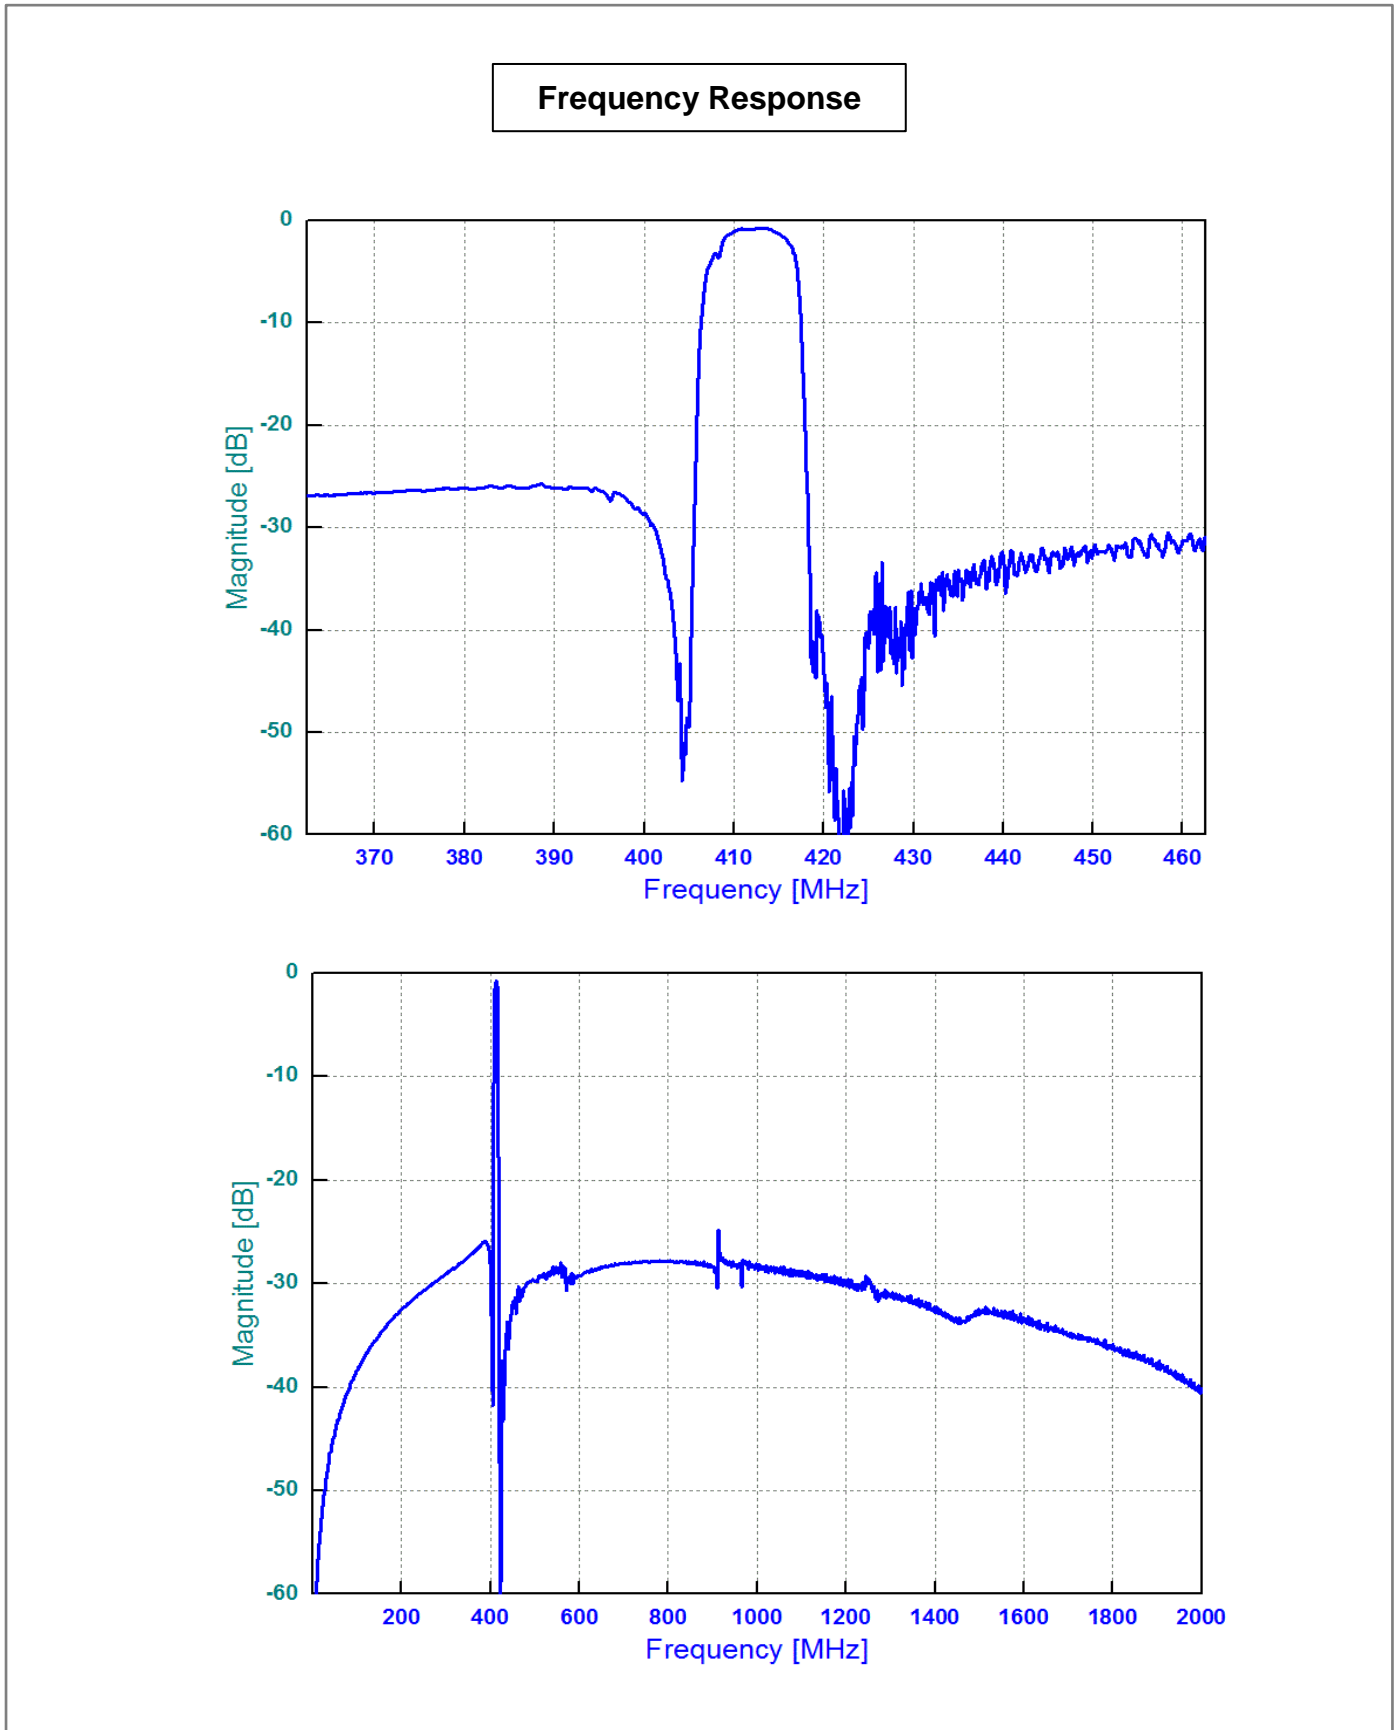

**VSWR**

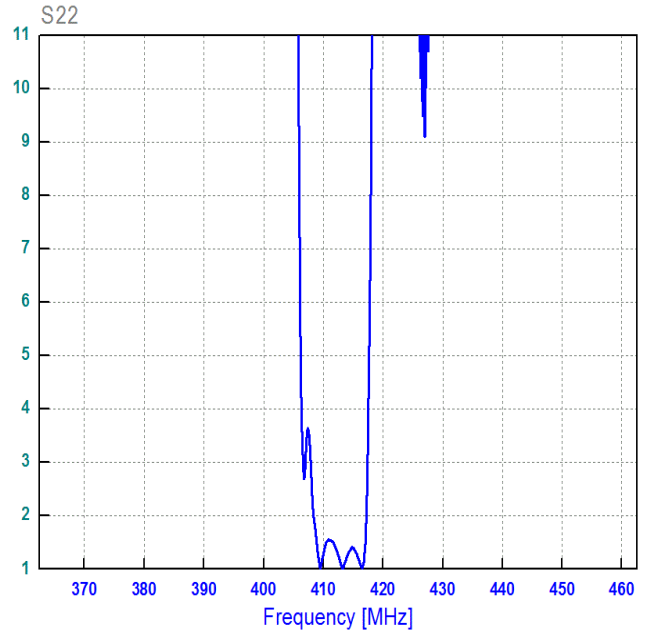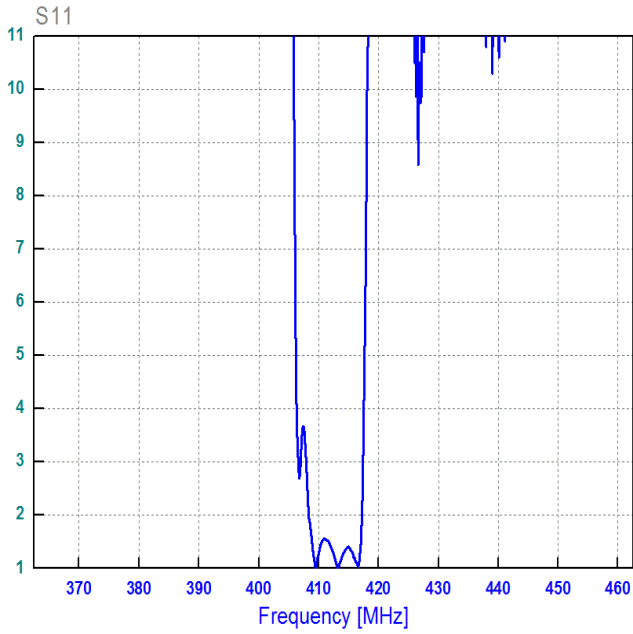

**Smith Chart**

