

- CDMA 450 E-Band, RF-Rx SAW Filter
- Revision 0: January 2010


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	427.75	-
Insertion Loss within 425.5 ~ 430.0 MHz	dB	-	1.8	3.0
<b>Attenuation:</b>				
0.3 ~ 415.5 MHz	dB	35	47	-
415.5 ~ 420.0 MHz	dB	35	45	-
450.0 ~ 600.0 MHz	dB	30	38	-
600.0 ~ 1200.0 MHz	dB	30	40	-
1200.0 ~ 2000.0 MHz	dB	27	35	-
VSWR within 425.5 ~ 430.0 MHz	-	-	1.6	2.3

**Notes :** (1) No Matching Network .


## Package Dimensions

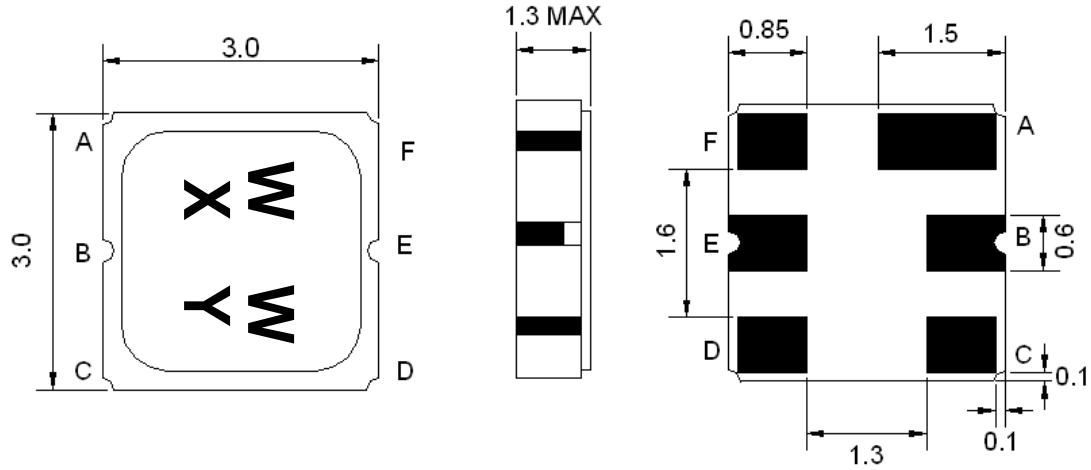

Marking Descriptions	
W	CDMA450 Application
W	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In

## Testing Environment


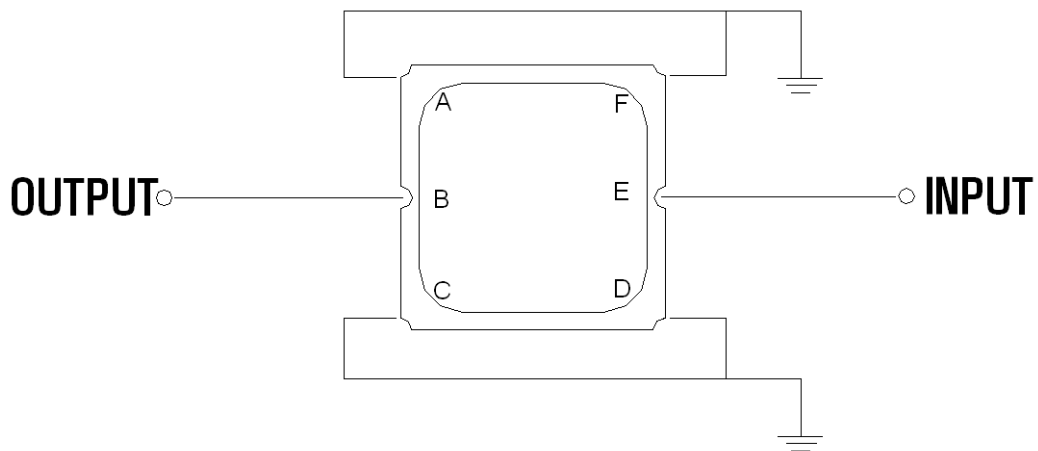


Source & Load Impedance: 50  $\Omega$

## Frequency Characteristics

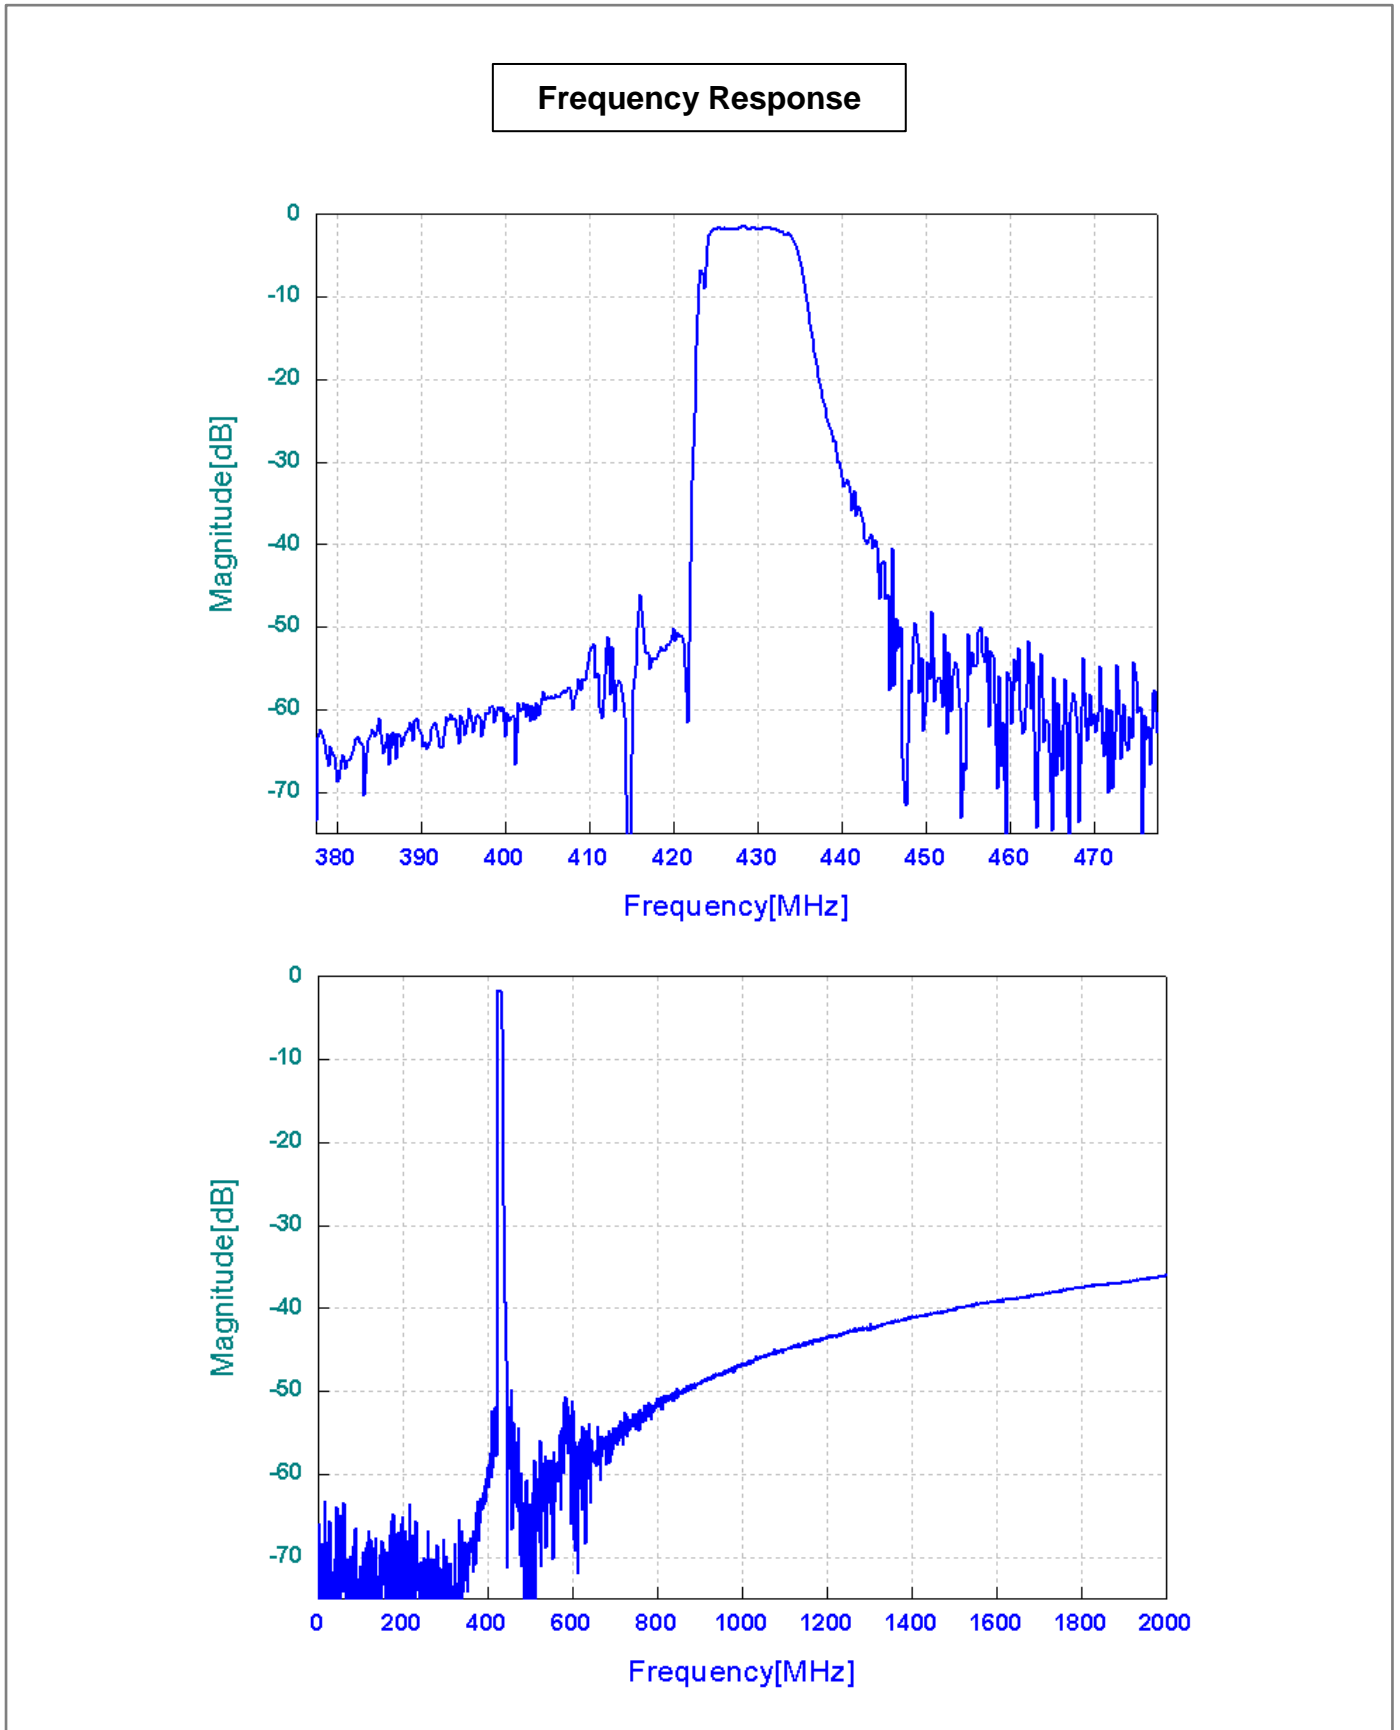

## VSWR

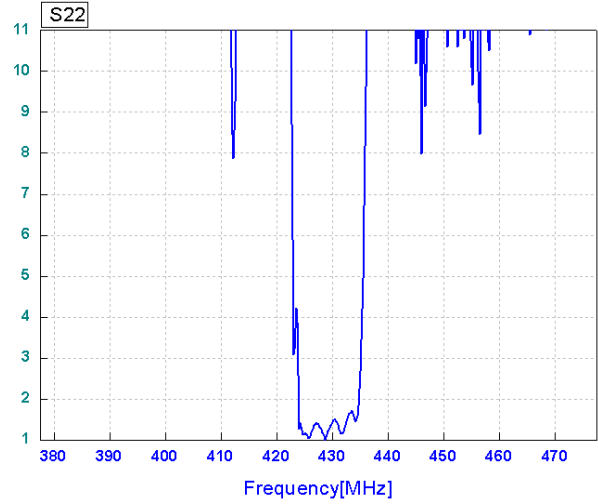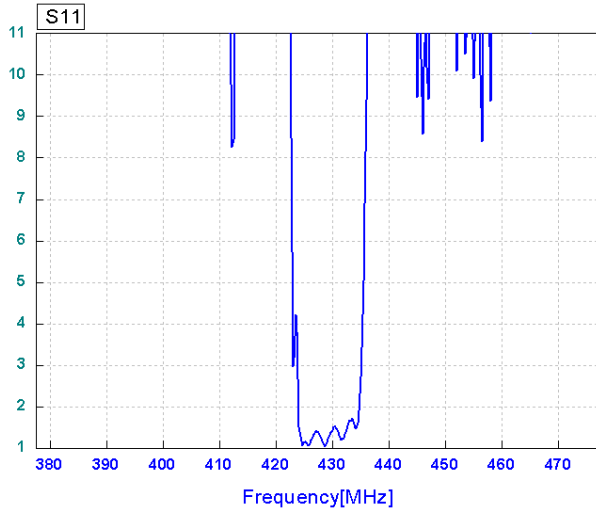

## Smith Chart

