

- CDMA 450 C-Band, Balanced RF-Rx SAW Filter
- Revision 0: April 2005


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	27
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (balanced ended) ⁽¹⁾	Ω	-	100	-
Package type & size	M1			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	462.5	-
Insertion Loss within 460.0 ~ 464.8 MHz	dB	-	2.7	4.0
Attenuation:				
0.3 ~ 450.0 MHz	dB	40	50	-
450.0 ~ 454.8 MHz	dB	35	47	-
485.0 ~ 505.0 MHz	dB	40	48	-
505.0 ~ 1200.0 MHz	dB	40	55	-
1200.0 ~ 2000.0 MHz	dB	35	50	-
VSWR within 460.0 ~ 464.8 MHz	-	-	1.7	2.4

Notes: (1) No Matching Network.


Package Dimensions

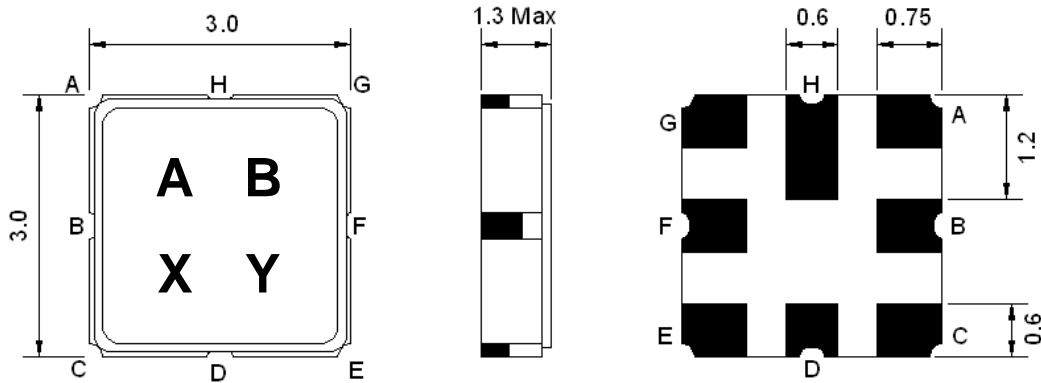

Marking Descriptions	
A	CDMA450 Application
B	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, F, H	Ground
B	In
E, G	Out

Testing Environment


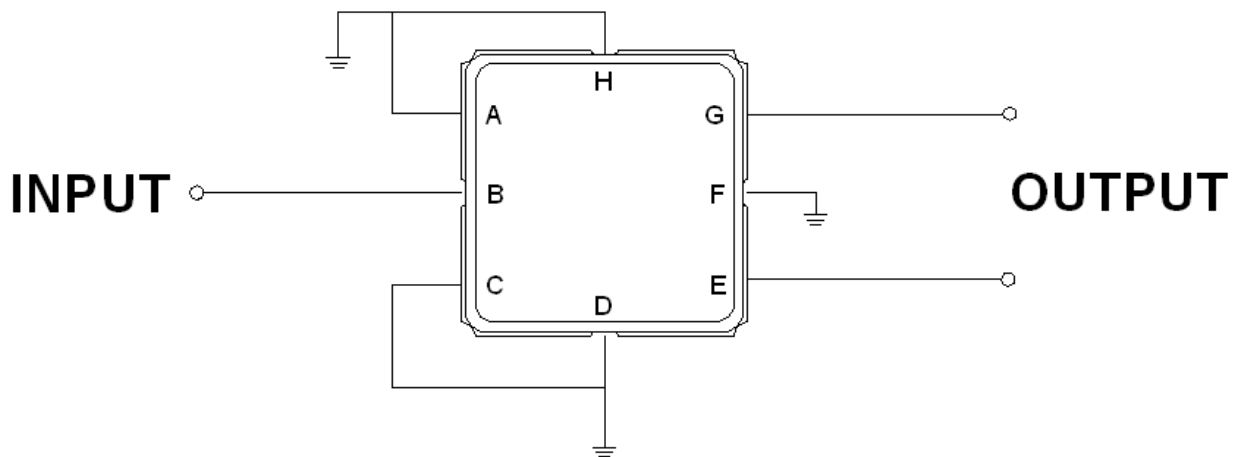


Source Impedance: 50 Ω



Load Impedance: 100 Ω

Frequency Characteristics

Frequency Response

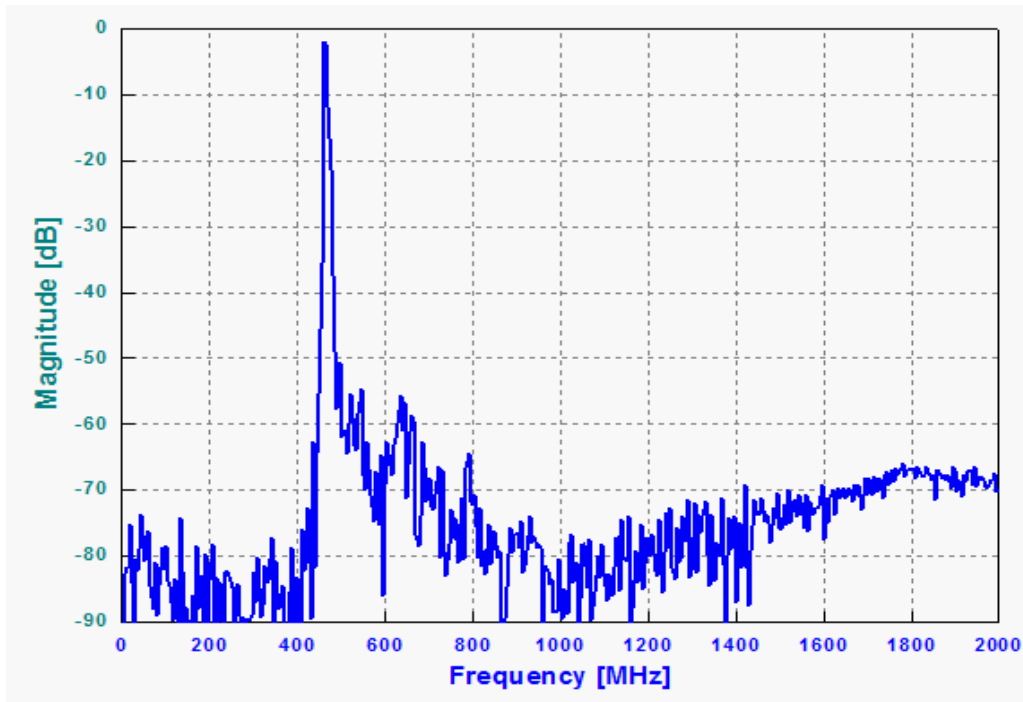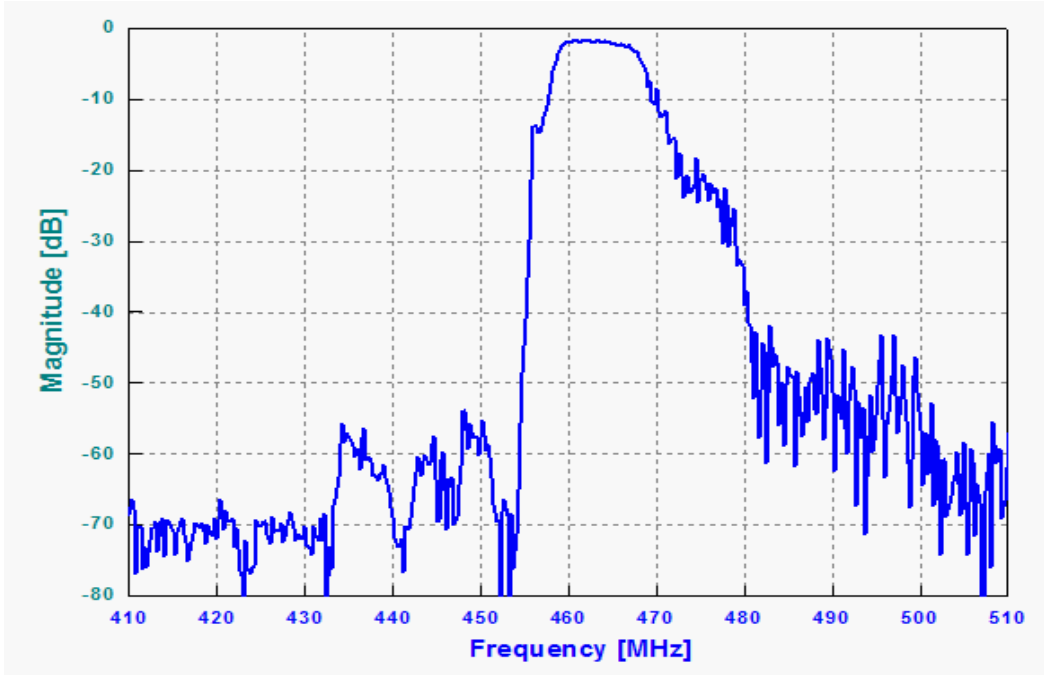

VSWR

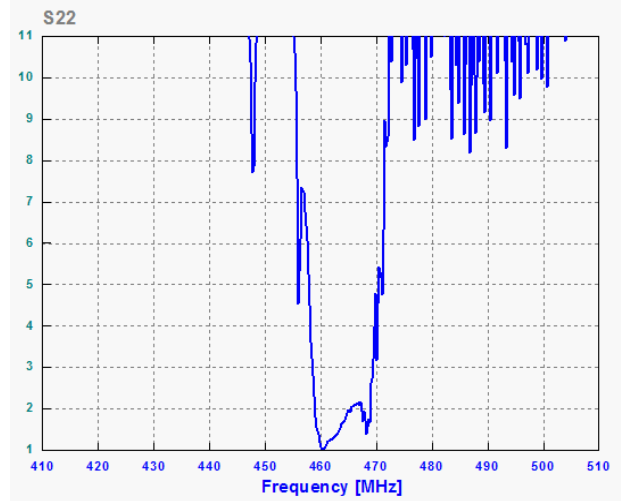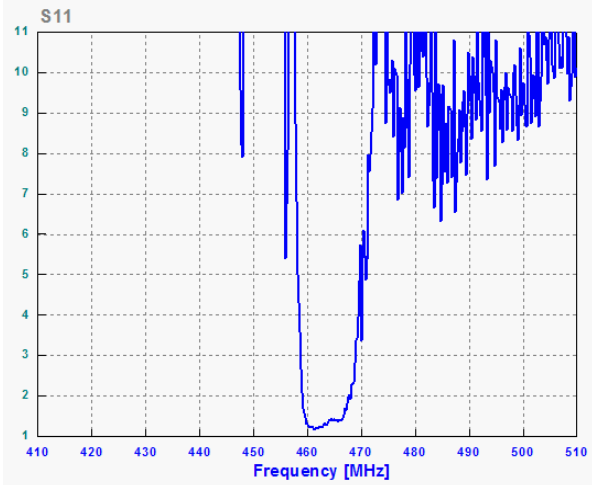

Smith Chart

