

- Wireless, RF SAW Filter
- Revision 0: November 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	811.0	-
Insertion Loss within 806.0 ~ 816.0 MHz	dB	-	2.0	3.0
Amplitude Ripple within 806.0 ~ 816.0 MHz	dB _{p-p}	-	0.5	1.0
Attenuation:				
851.0 ~ 861.0 MHz	dB	40	52	-
VSWR within 806.0 ~ 816.0 MHz	-	-	1.6	2.0

Notes: (1) No Matching Network


Package Dimensions

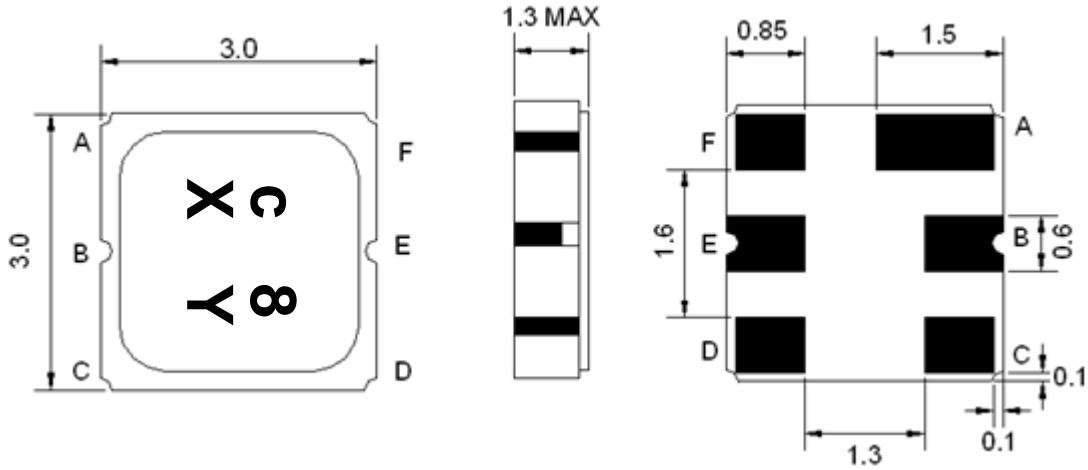

Marking Descriptions	
c	Wireless Application
8	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In



Testing Environment

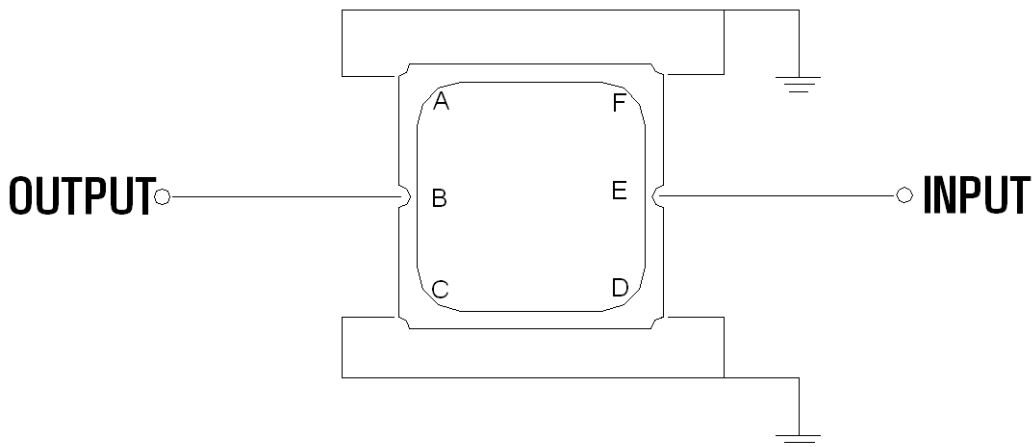



Source & Load Impedance: 50 Ω

Frequency Characteristics

Frequency Response

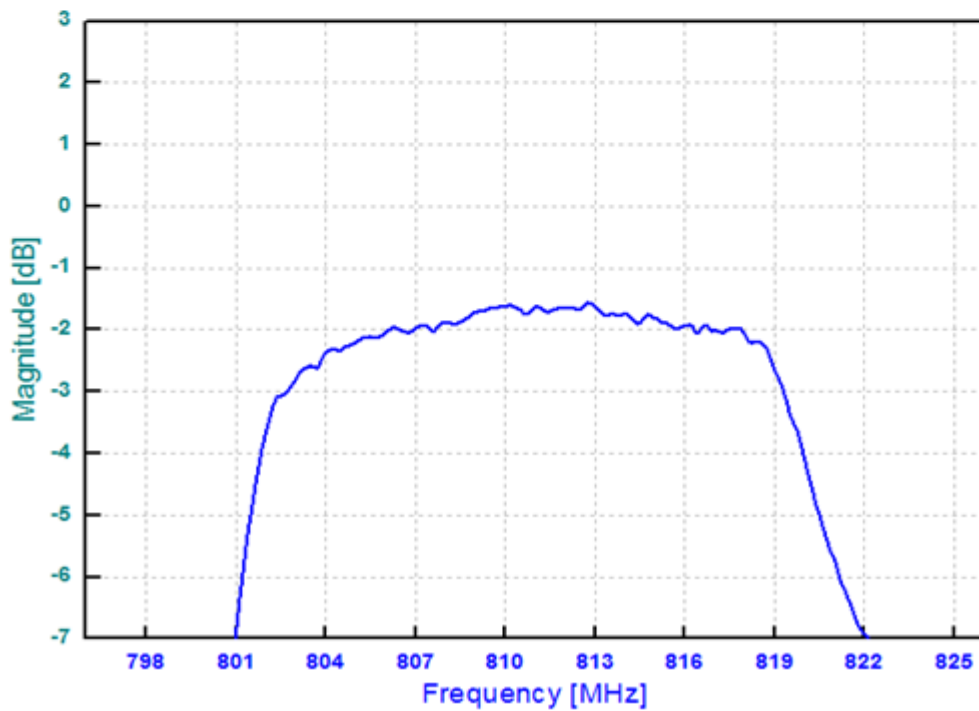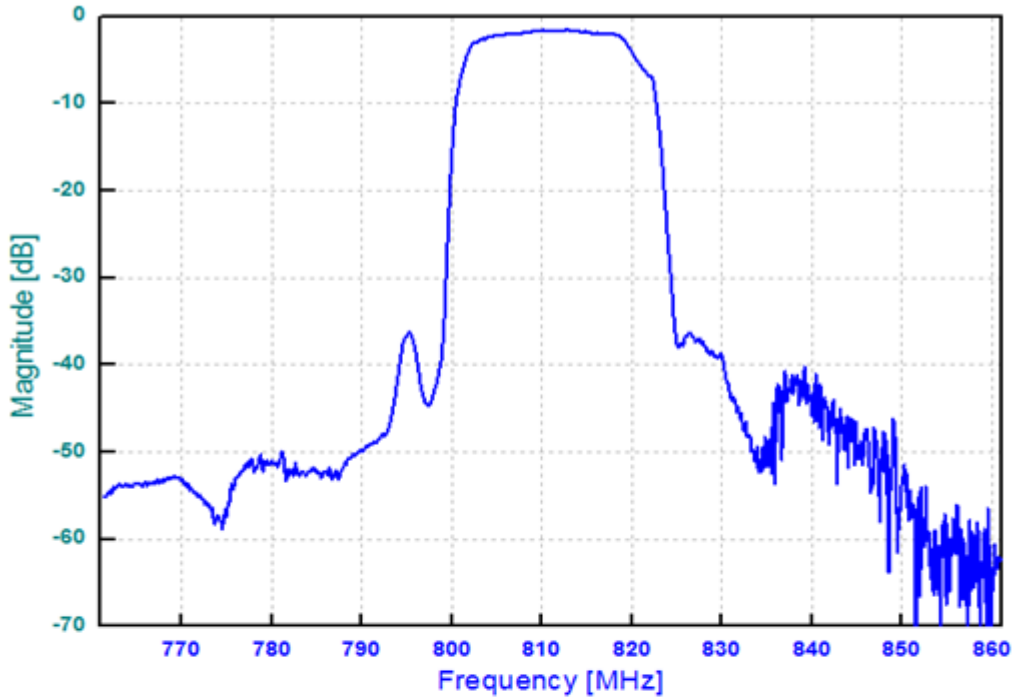

VSWR

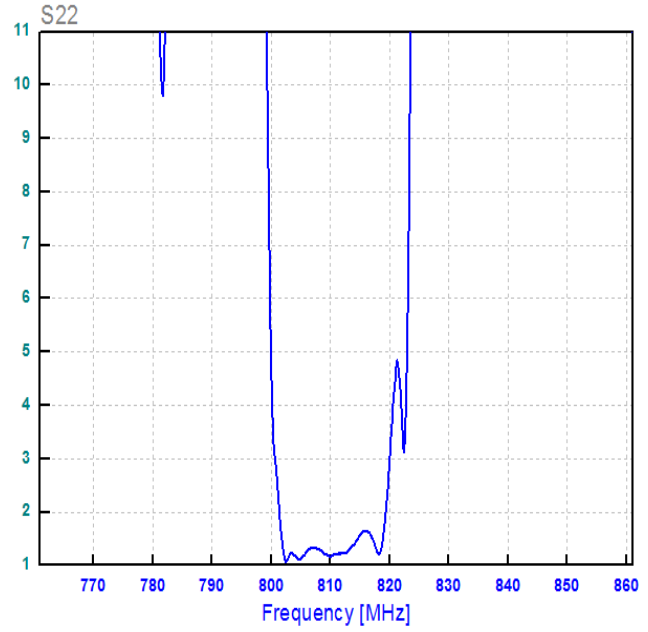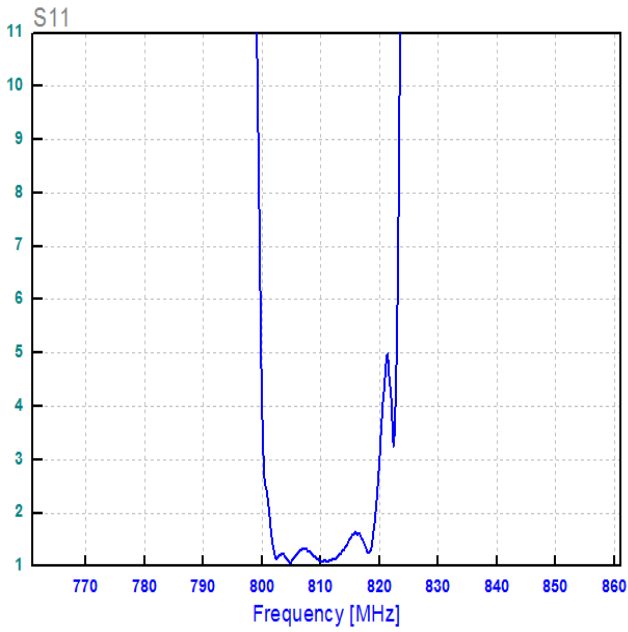

Smith Chart

