

- Wireless, RF SAW Filter
- Revision 0: July 2011


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	847.0	-
Insertion Loss within 832.0 ~ 862.0 MHz	dB	-	2.7	4.5
Amplitude Ripple within 832.0 ~ 862.0 MHz	dB _{p-p}	-	1.2	2.5
Return Loss within 832.0 ~ 862.0 MHz	dB	7.5	11	-
Attenuation:				
692.0 ~ 722.0 MHz	dB	45	55	-
1000.0 ~ 3000.0 MHz	dB	20	25	-
20.0 ~ 650.0 MHz	dB	45	60	-
902.0 ~ 932.0 MHz	dB	30	35	-
762.0 ~ 792.0 MHz	dB	40	50	-
791.0 ~ 821.0 MHz	dB	15	28	-

Notes: (1) No Matching Network

Package Dimensions


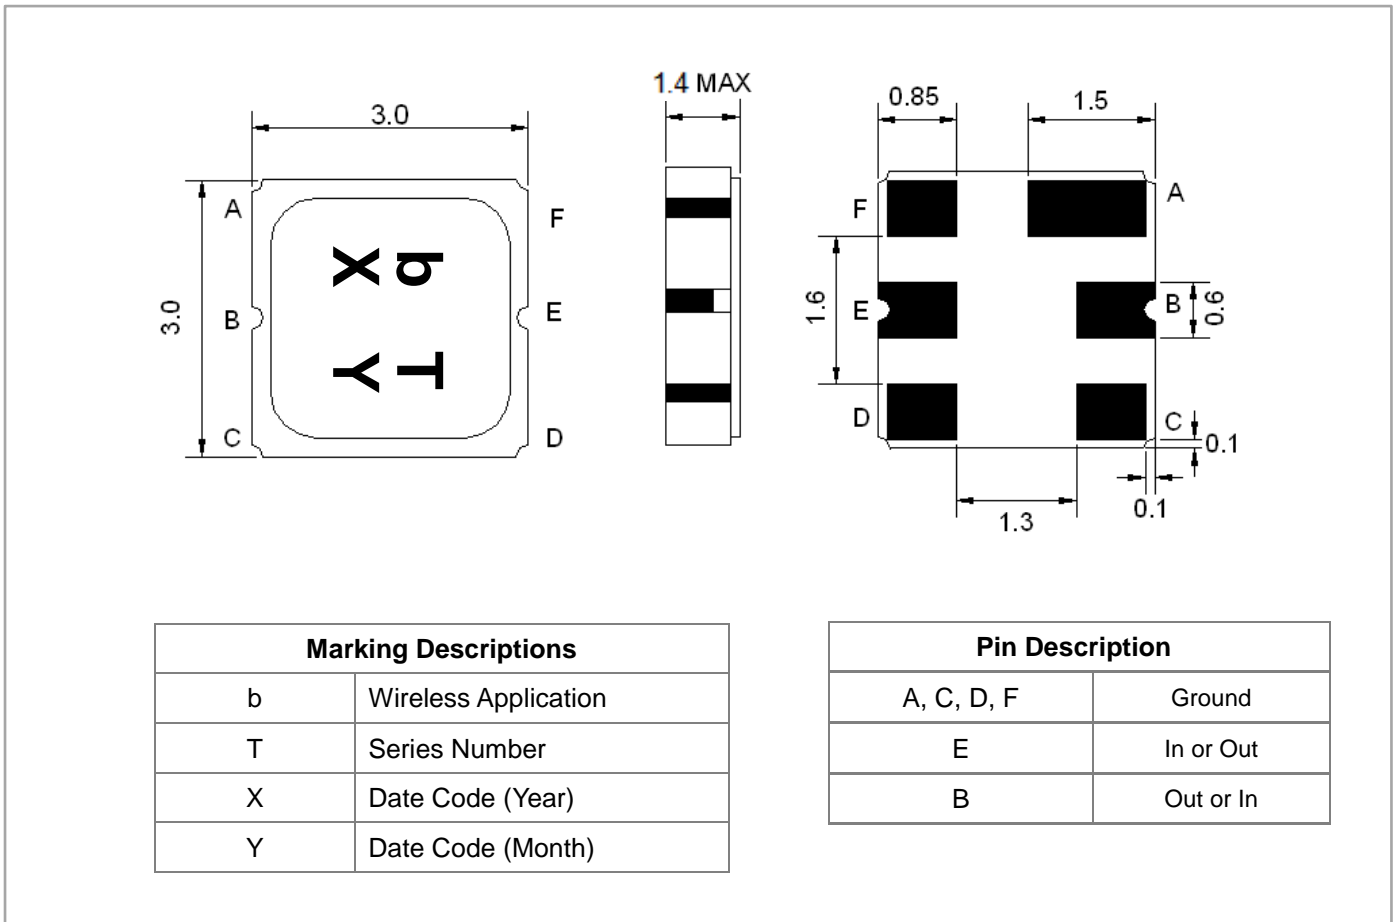


Testing Environment


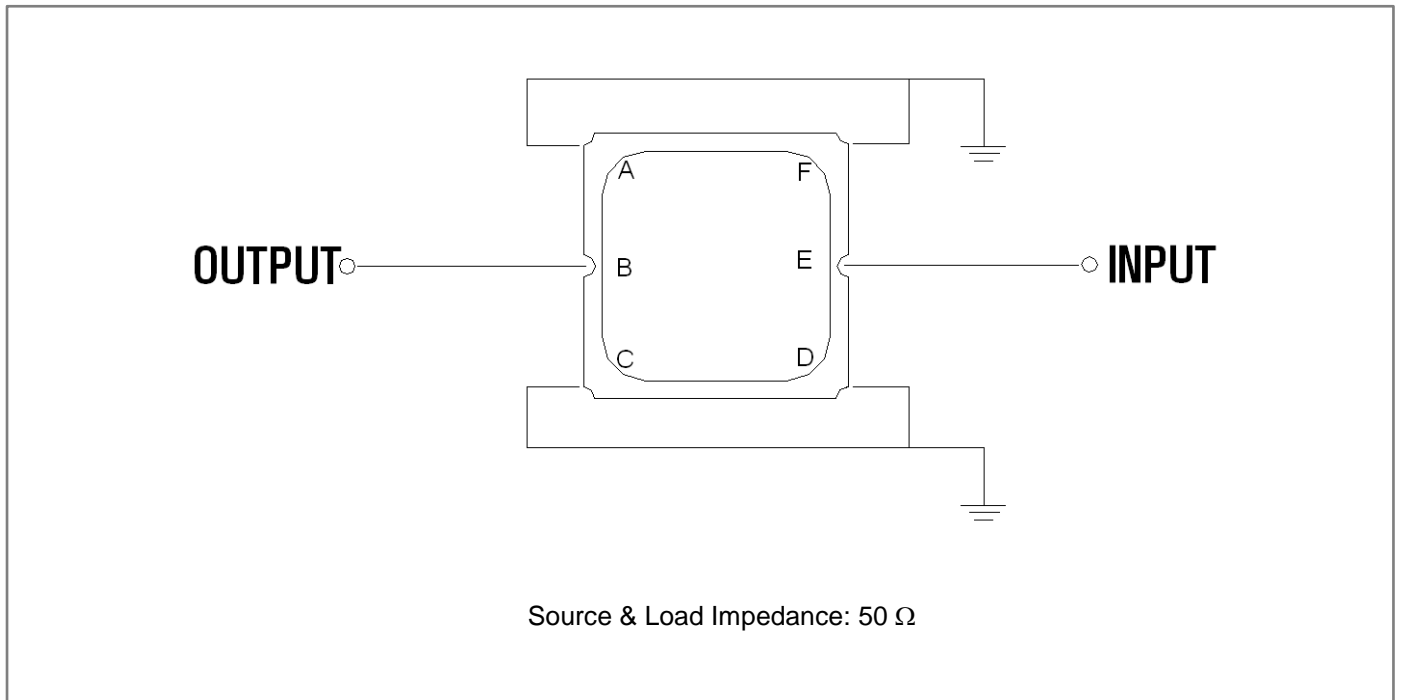


Frequency Characteristics

Frequency Response

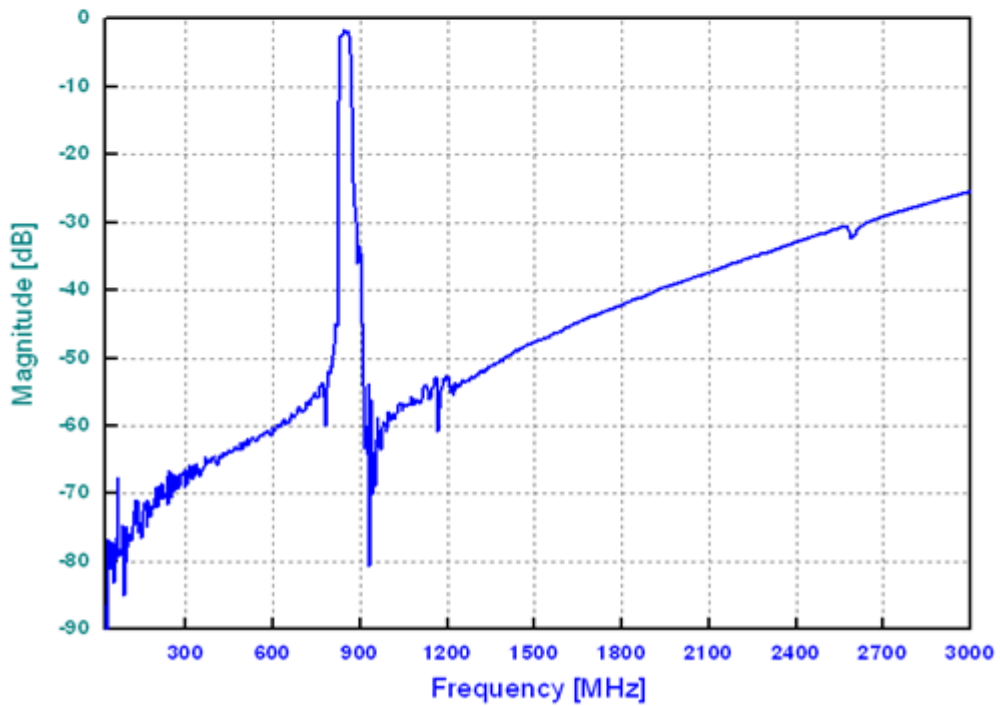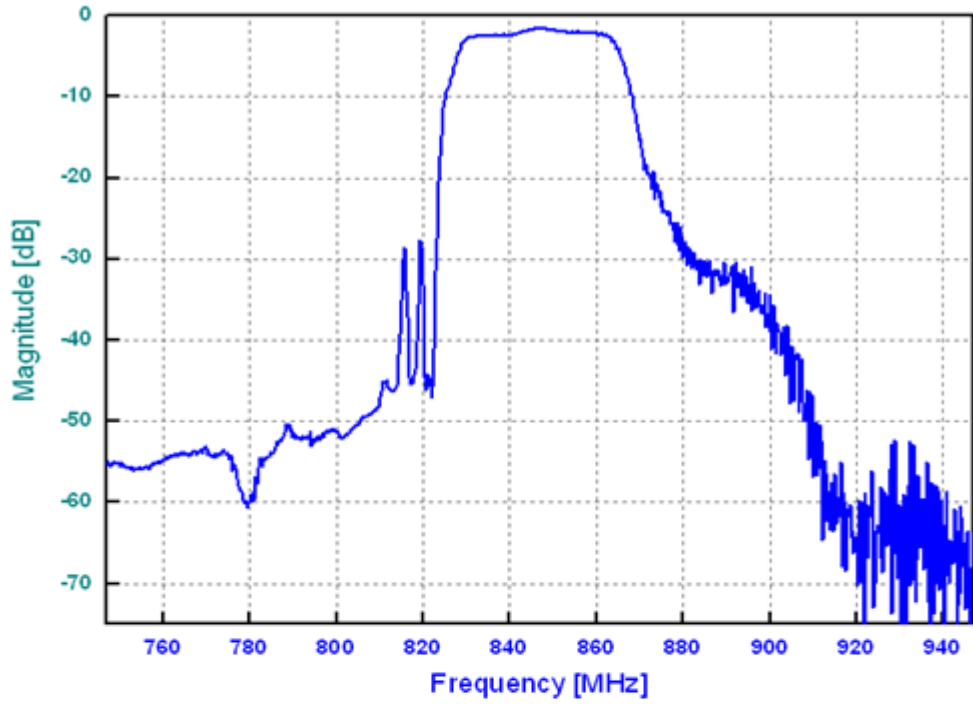

Return Loss

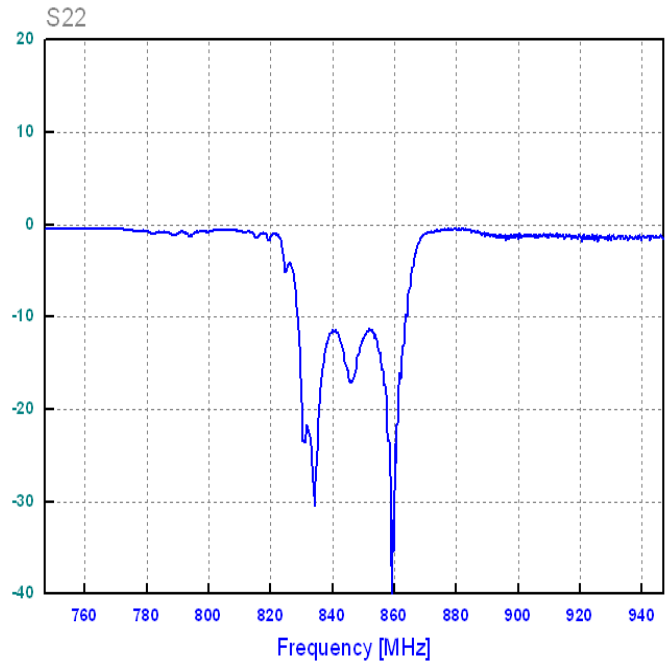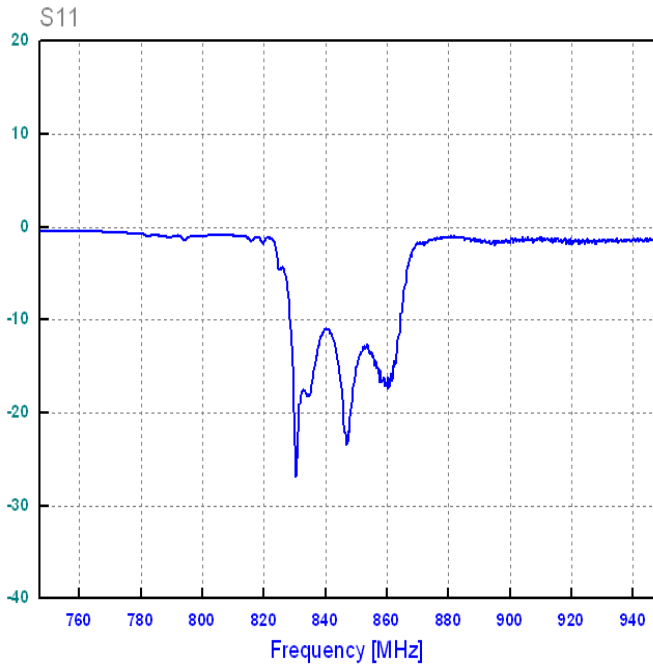

Smith Chart

