

- Wireless, RF SAW Filter
- Revision 0: December 2010


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	910.0	-
Insertion Loss within 905.0 ~ 915.0 MHz	dB	-	2.3	3.2
Amplitude Ripple within 905.0 ~ 915.0 MHz	dB <sub>p-p</sub>	-	0.6	1.2
<b>Attenuation:</b>				
950.0 ~ 960.0 MHz	dB	40	52	-
VSWR within 905.0 ~ 915.0 MHz	-	-	1.6	2.1

**Notes:** (1) No Matching Network


## Package Dimensions

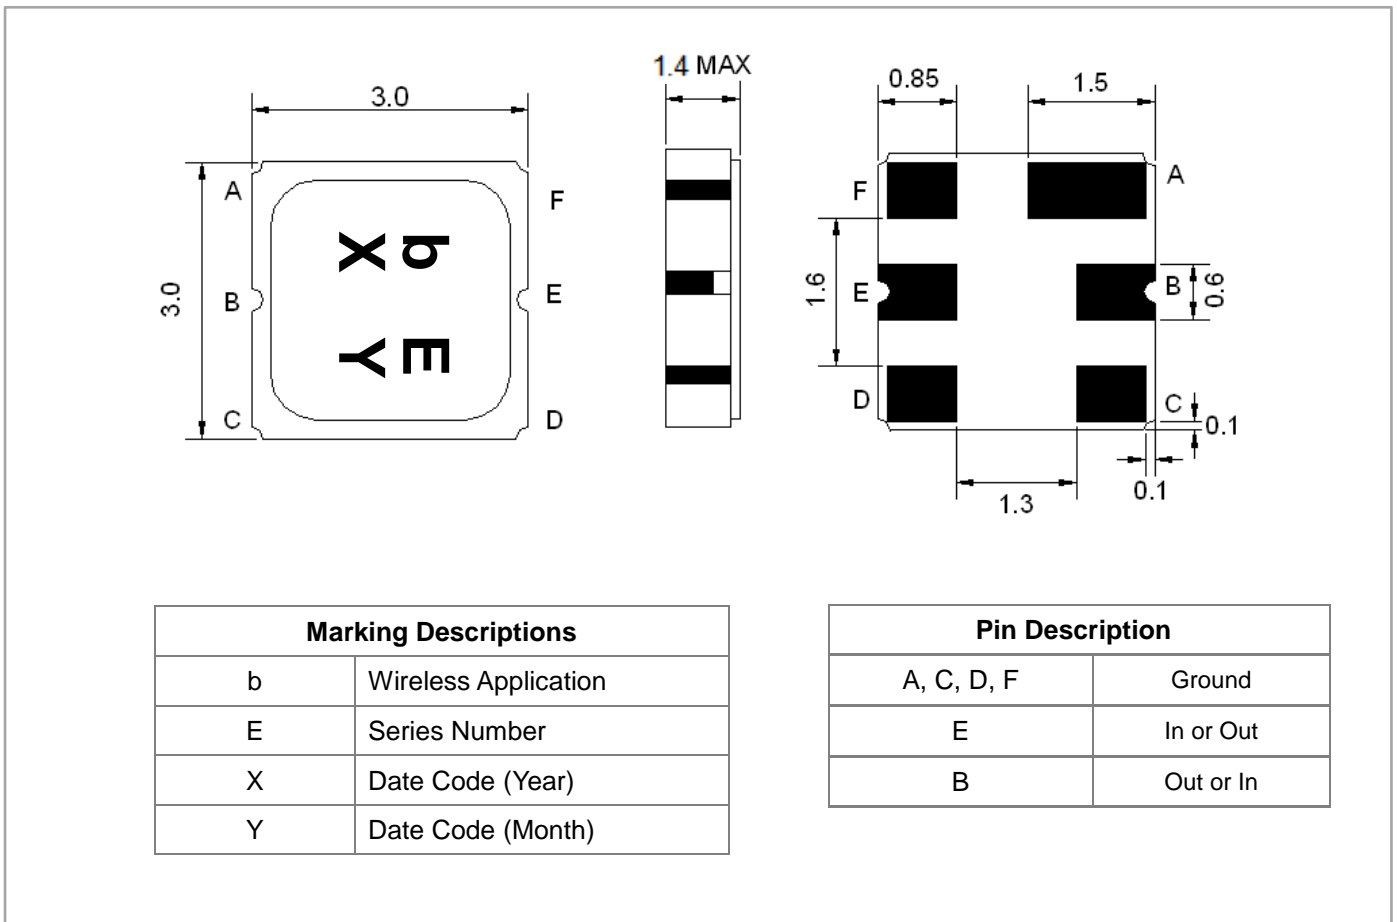



## Testing Environment

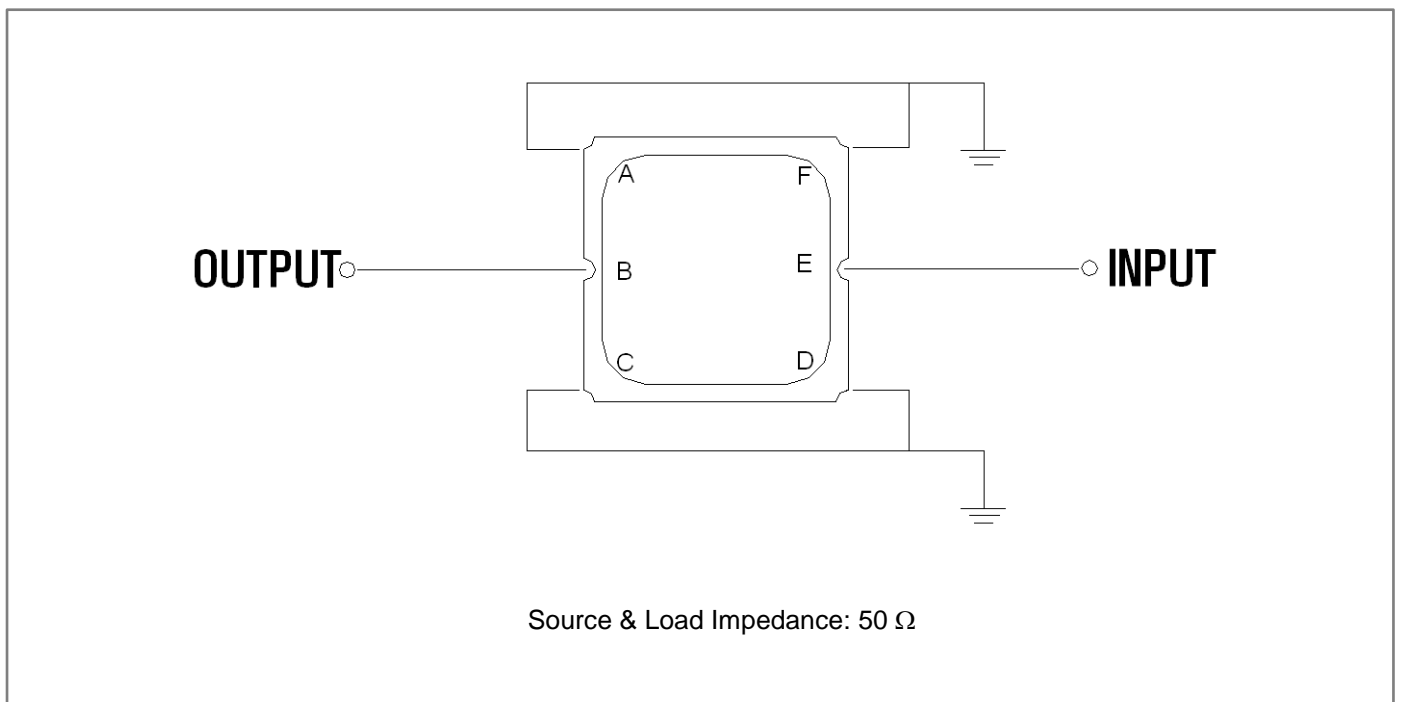

## Frequency Characteristics

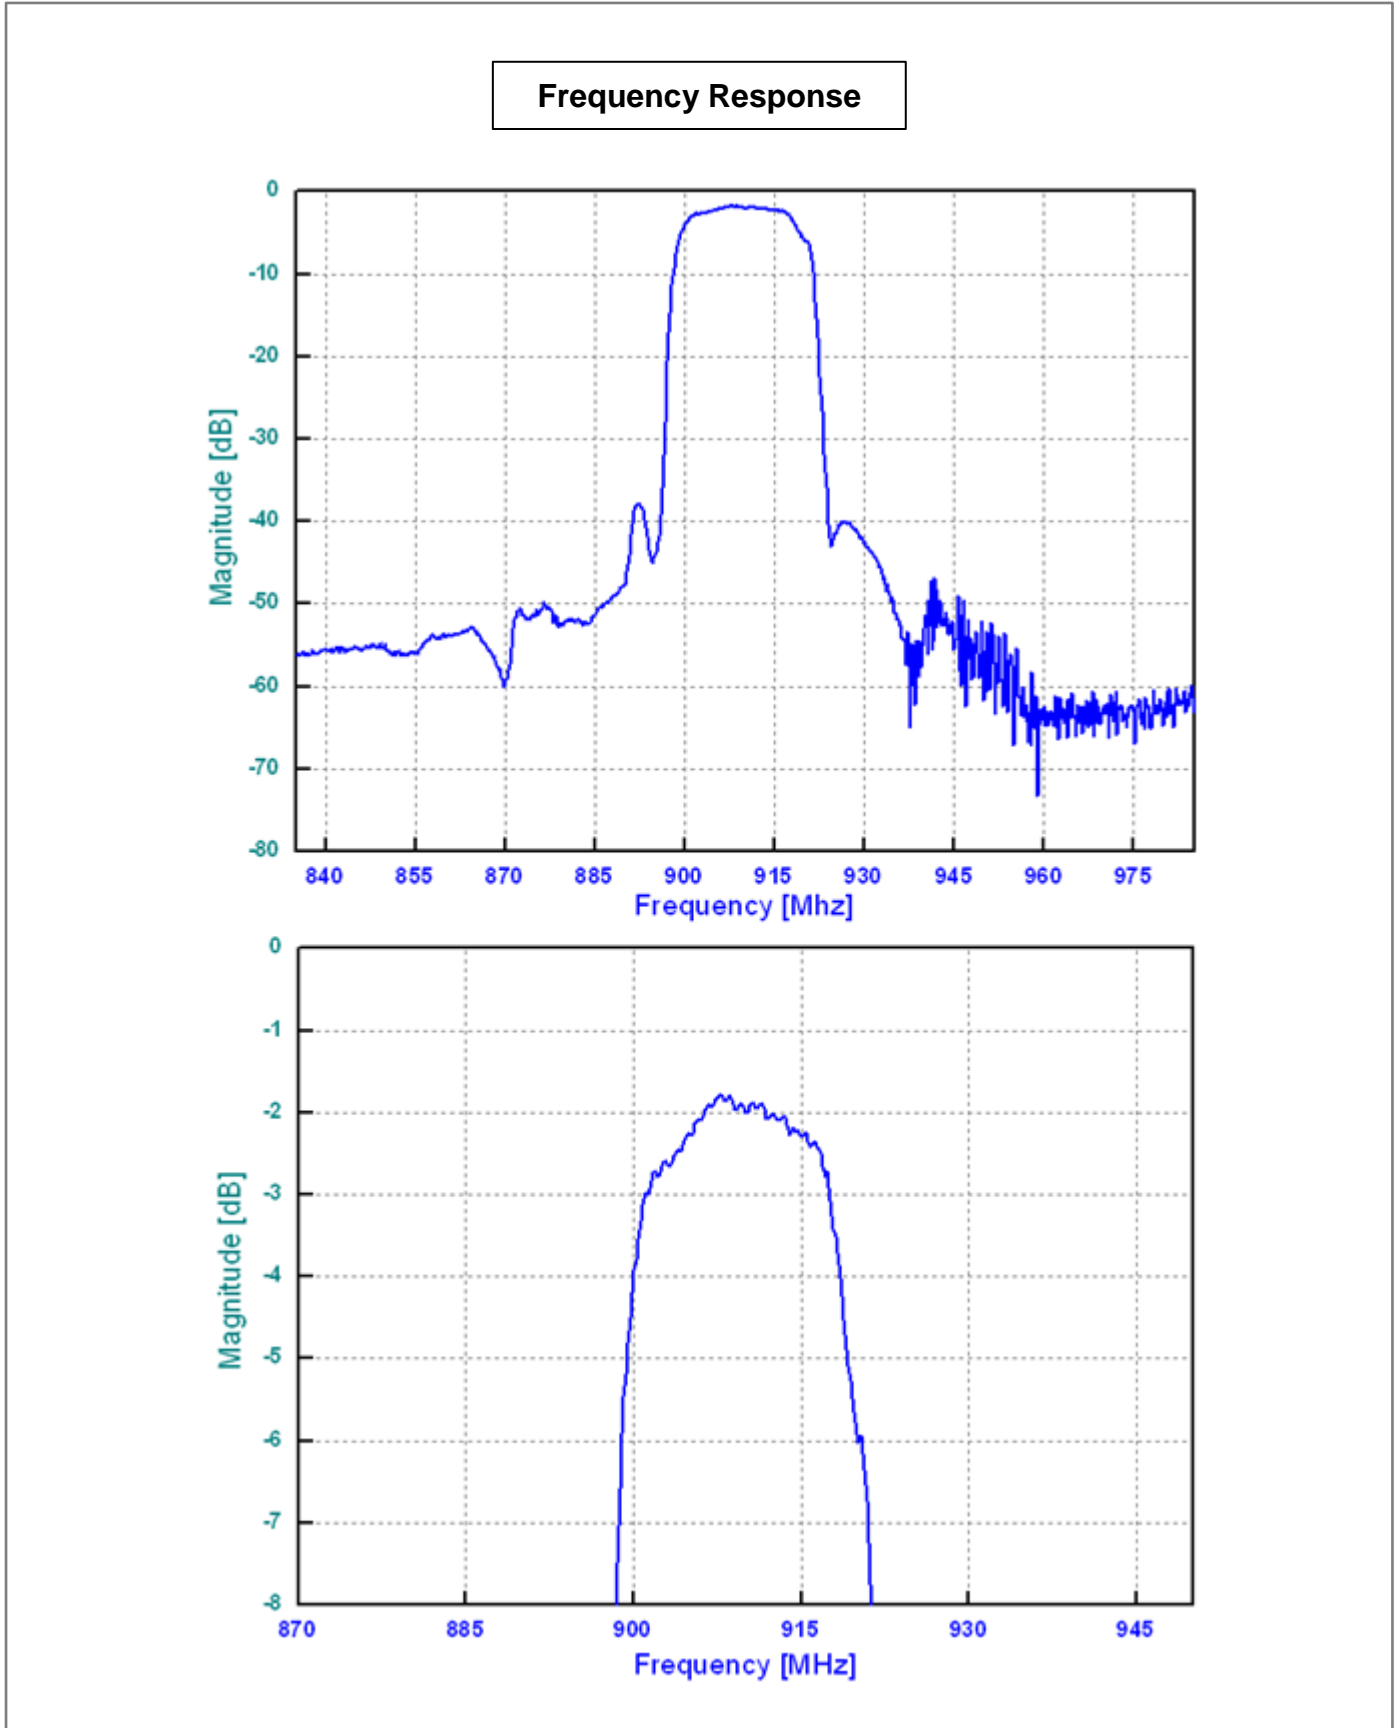

### VSWR

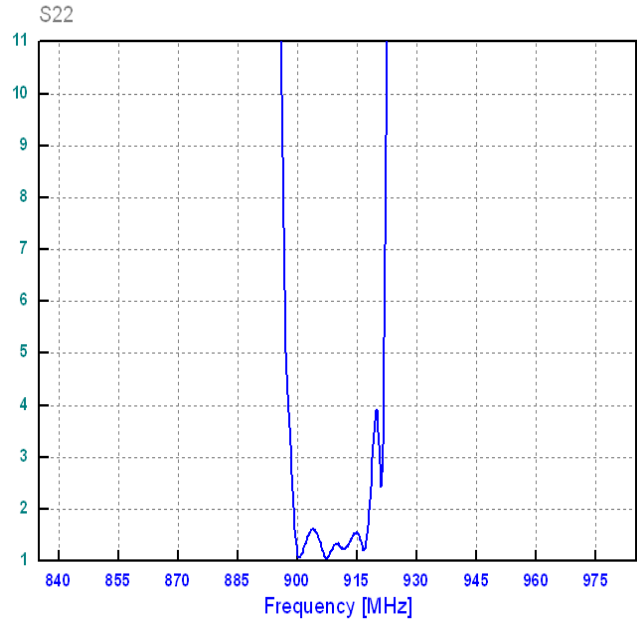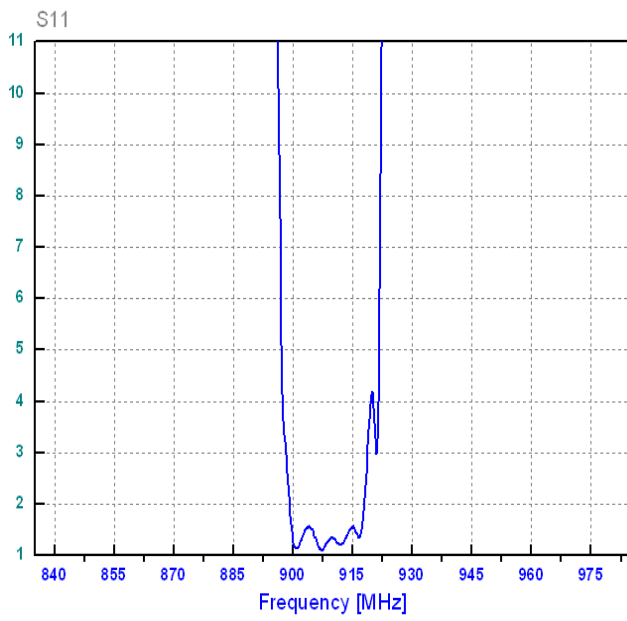

### Smith Chart

