

- Wireless, RF SAW Filter
- Revision 0: February 2007


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	M			
Length x Width	mm <sup>2</sup>	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	915.0	-
Insertion Loss within 911.5 ~ 918.5 MHz	dB	-	2.6	4.0
Amplitude Ripple within 911.5 ~ 918.5 MHz	dB <sub>p-p</sub>	-	0.5	1.5
<b>Attenuation:</b>				
D.C. ~ 600 MHz	dB	50	60	-
600 ~ 840 MHz	dB	40	55	-
869 ~ 894 MHz	dB	35	45	-
970 ~ 1500 MHz	dB	40	50	-
VSWR within 911.5 ~ 918.5 MHz	-	-	1.5	2.0

**Notes:** (1) No Matching Network (Ref. Testing Environment Circuit as shown below).

## Package Dimensions


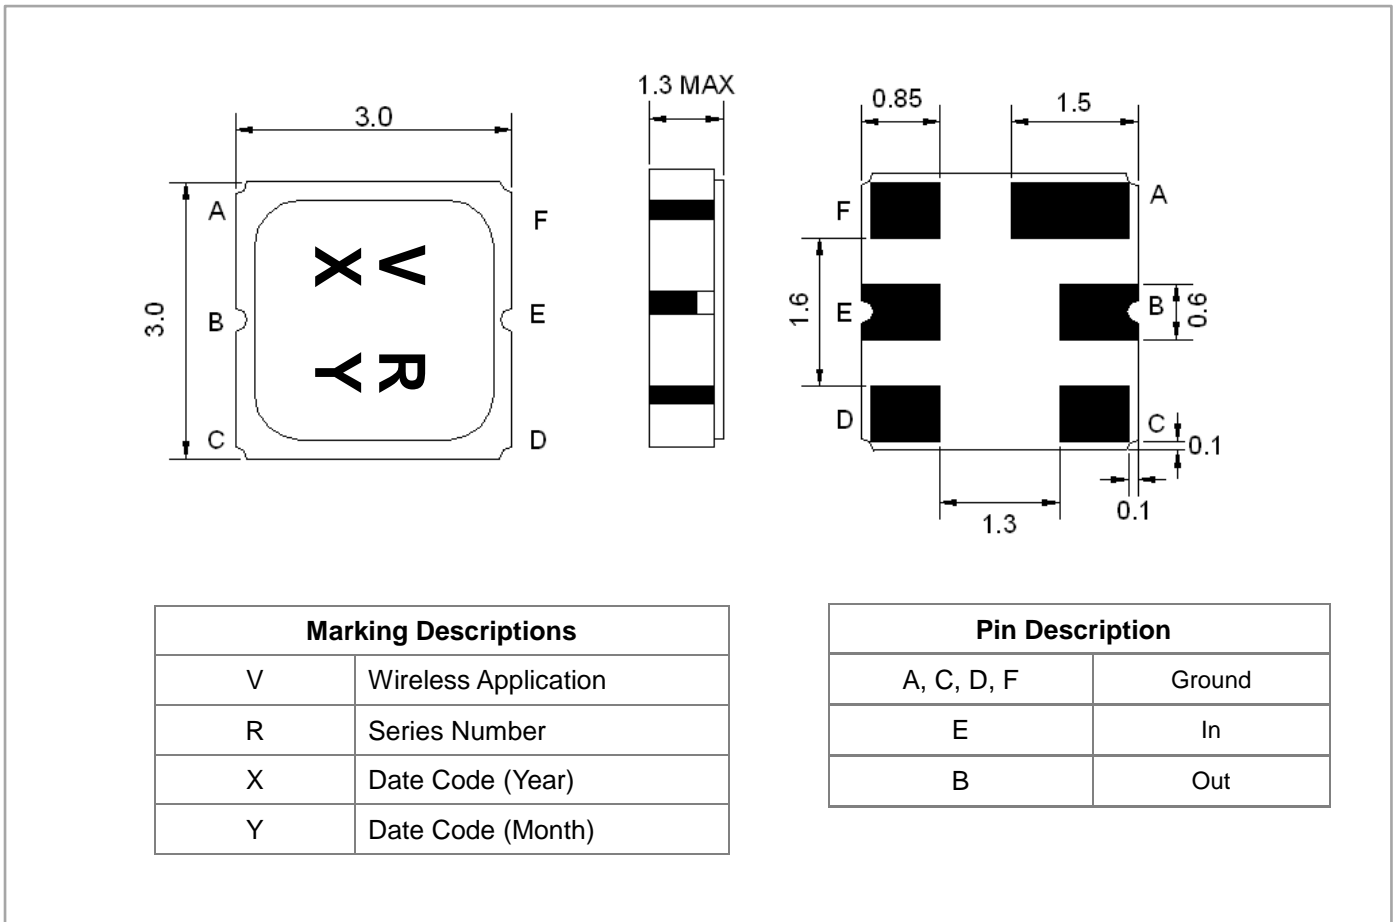


## Testing Environment


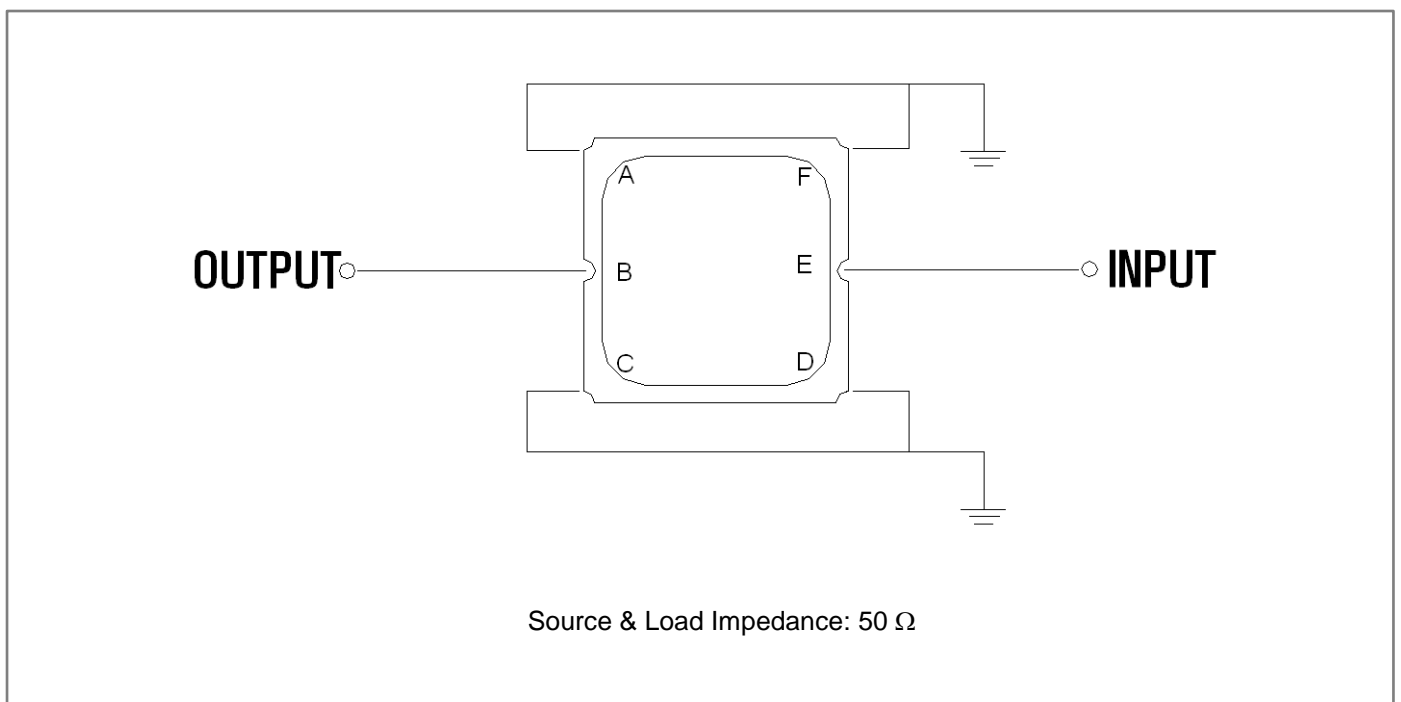


## Frequency Characteristics

Frequency Response

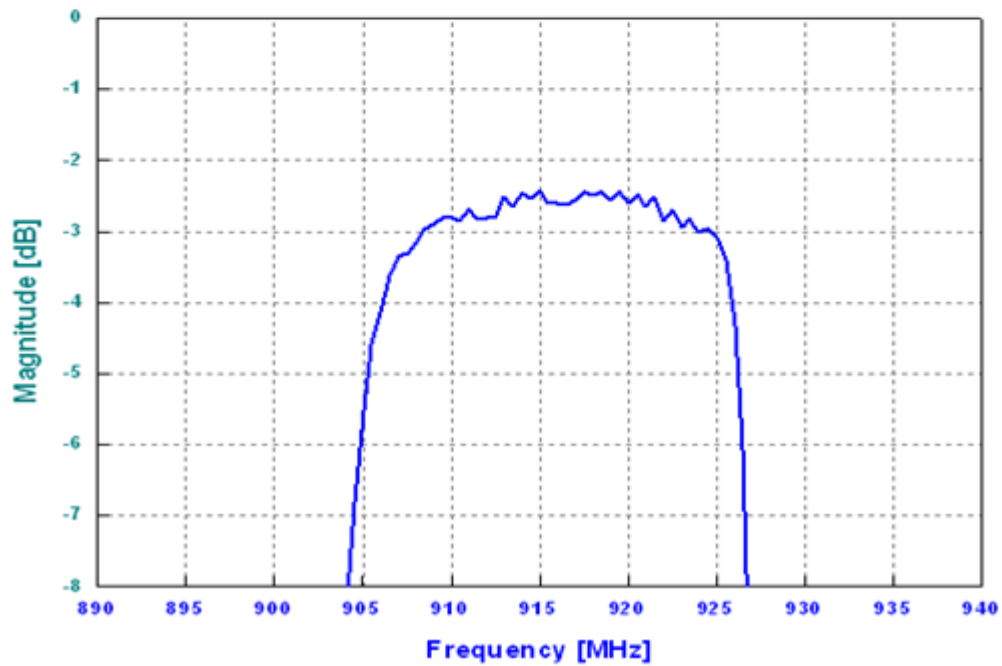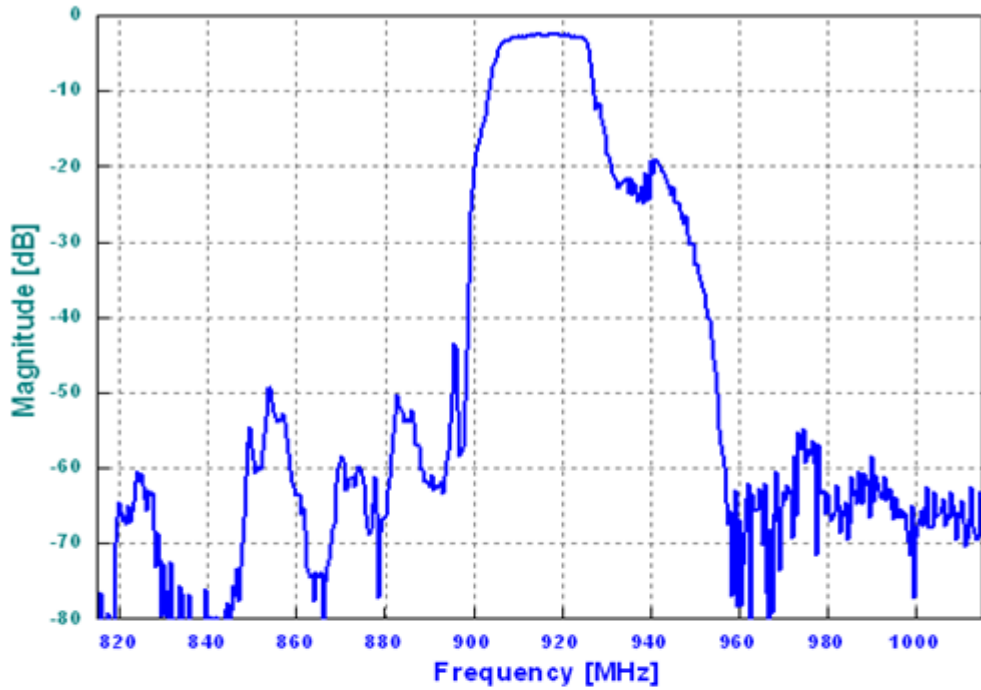

## VSWR

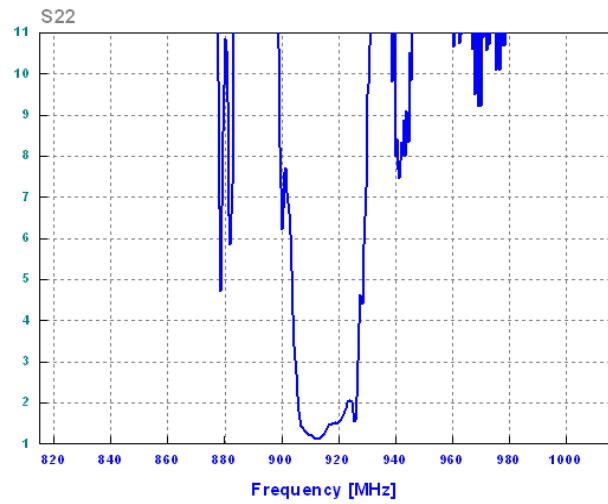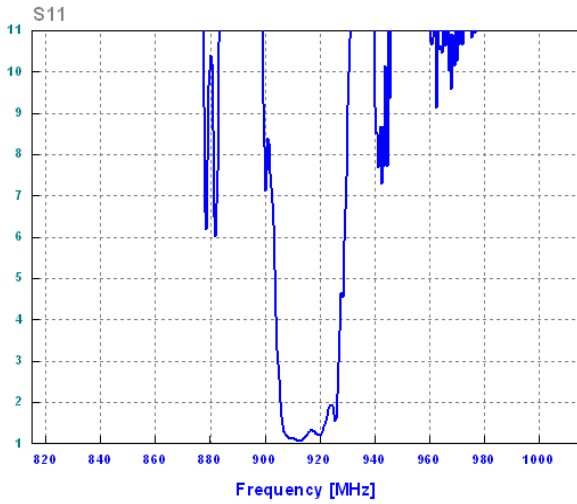

## Smith Chart

