

- Wireless, RF SAW Filter
- Revision 0: May 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+65
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	939.0	-
Insertion Loss within 936 ~ 942 MHz	dB	-	2.5	3.0
Amplitude Ripple within 936 ~ 942 MHz	dB _{p-p}	-	0.3	1.0
Attenuation:				
D.C. ~ 840 MHz	dB	50	65	-
840 ~ 894 MHz	dB	45	55	-
984 ~ 1000 MHz	dB	40	43	-
1000 ~ 1500 MHz	dB	50	60	-
1500 ~ 2000 MHz	dB	40	45	-
VSWR within 936 ~ 942 MHz	-	-	1.5	2.0

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).

Package Dimensions


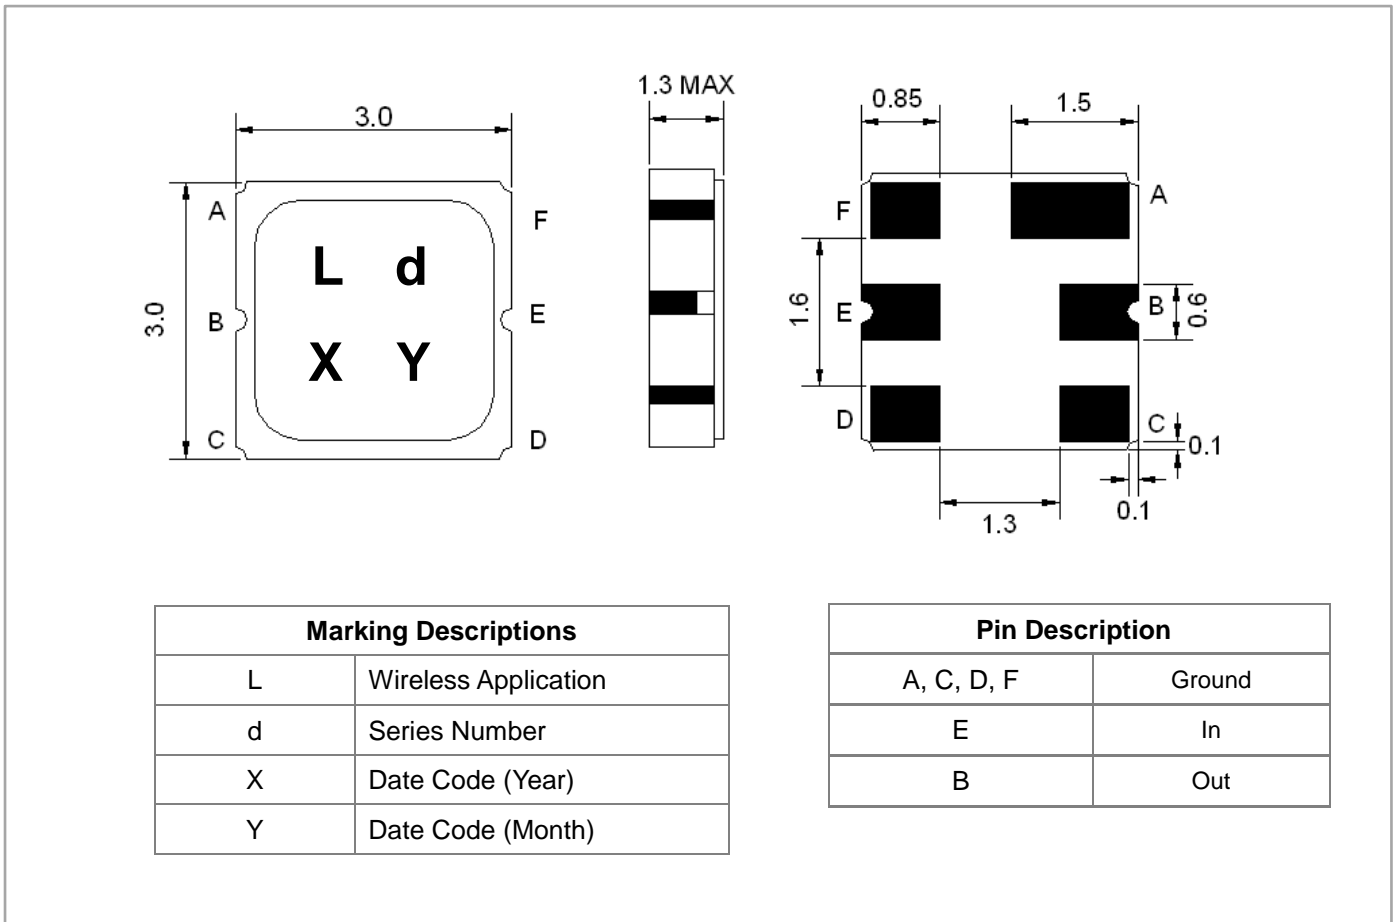


Testing Environment


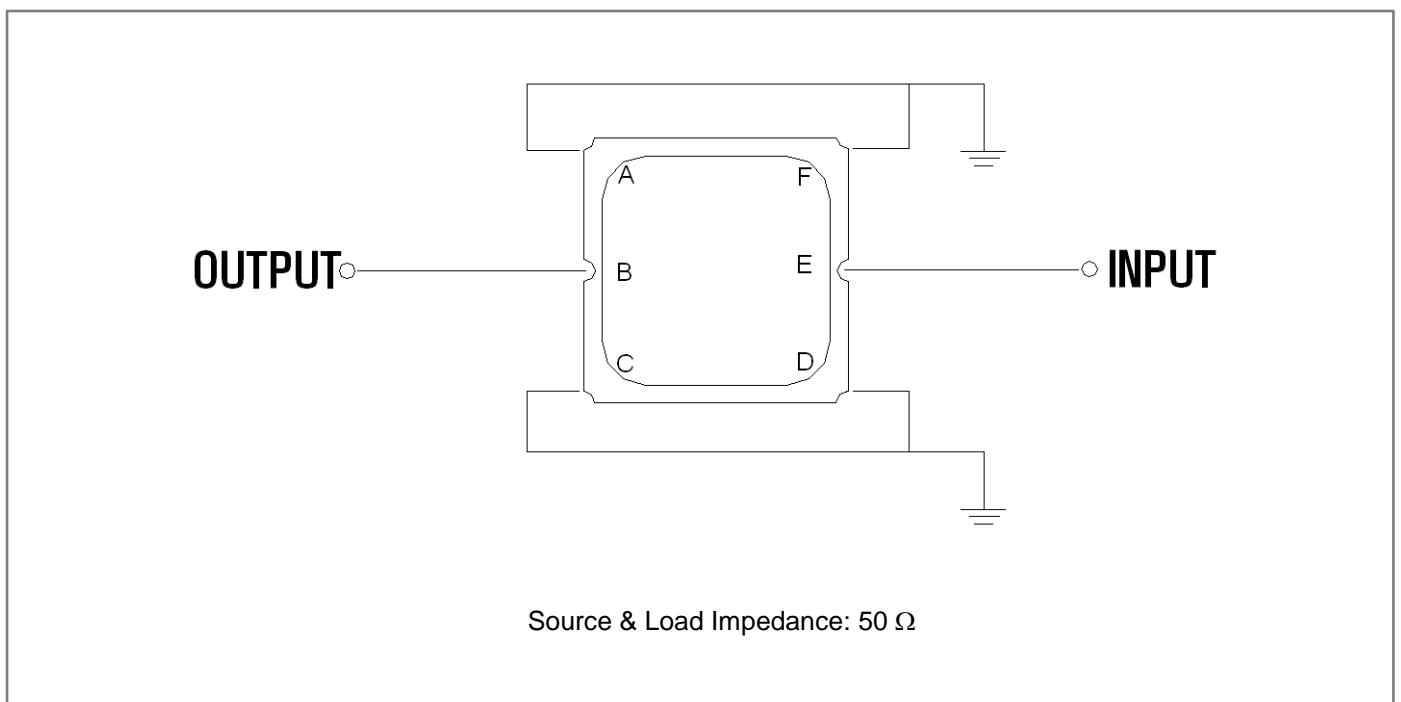


Frequency Characteristics

Frequency Response

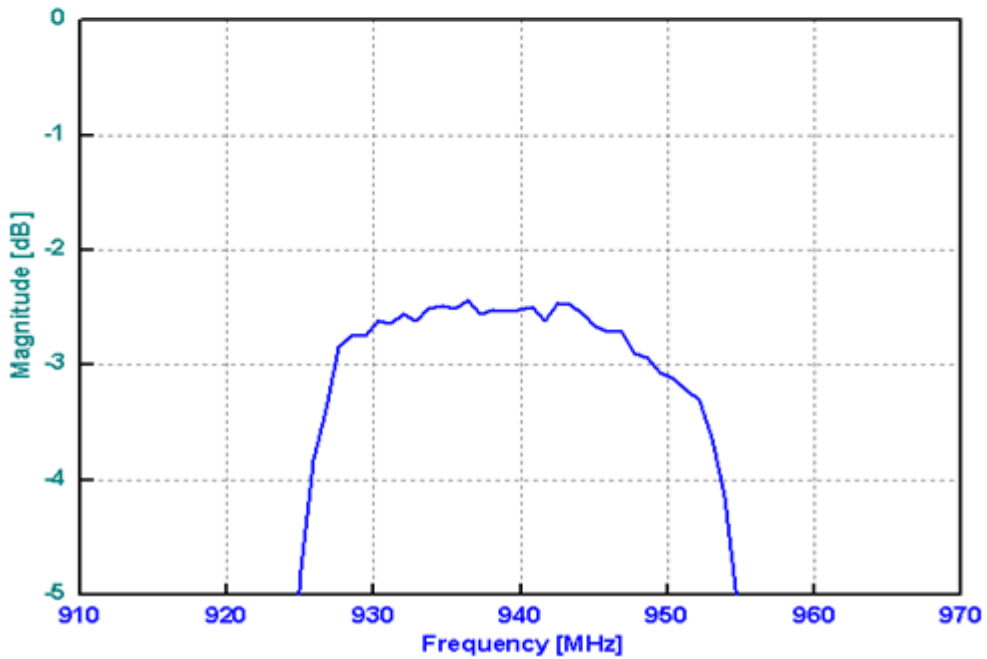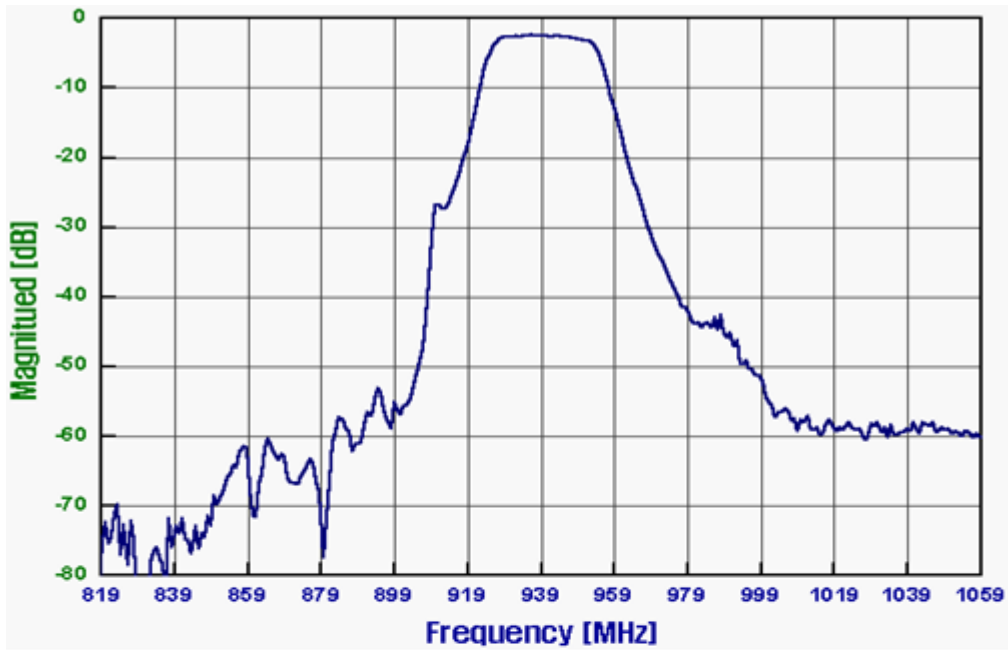

VSWR

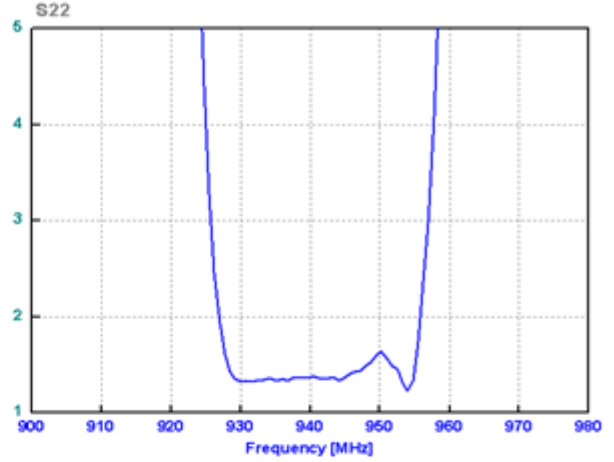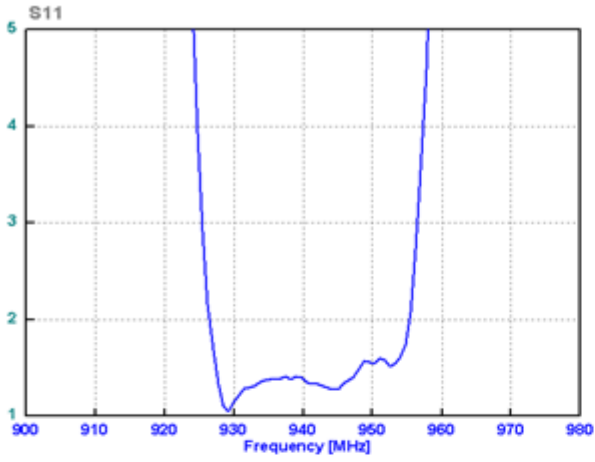

VSWR

