

- Wireless, RF SAW Filter
- Revision 0: August 2007


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	P			
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	-	1.4


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	967.0	-
Insertion Loss within 964.0 ~ 970.0 MHz	dB	-	2.8	3.5
Amplitude Ripple within 964.0 ~ 970.0 MHz	dB _{p-p}	-	0.5	1.0
Attenuation:				
D.C ~ Fo-45.0 MHz	dB	45	55	-
Fo+70.0 ~ Fo+500.0 MHz	dB	50	60	-
VSWR within 964.0 ~ 970.0 MHz	-	-	1.5	2.0

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).

Package Dimensions

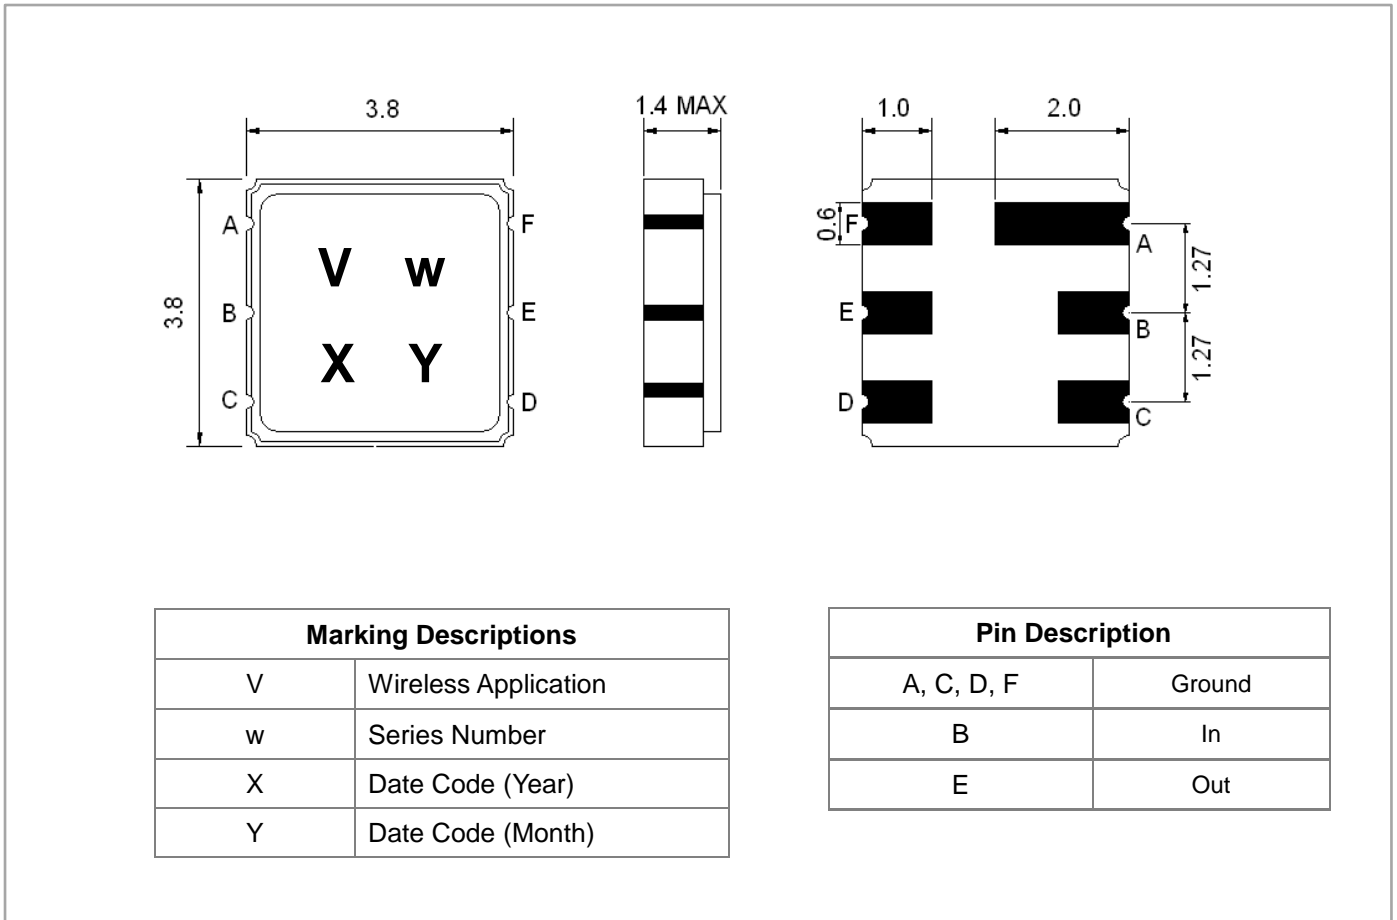

Testing Environment

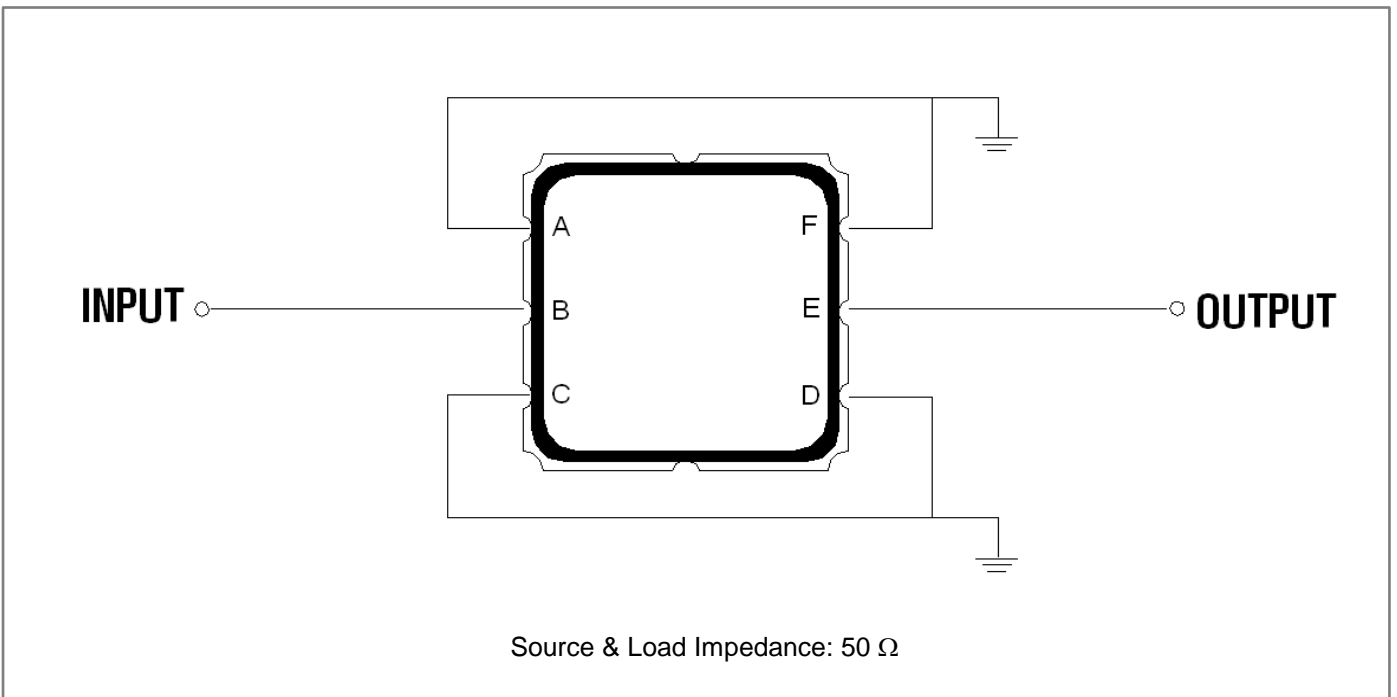

Frequency Characteristics

Frequency Response

