

- PCN, RF SAW Filter
- Revision 0: September 2012


Electrical Characteristics

MAXIMUM RATINGS				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	S20			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3


ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	1842.5	-
Insertion Loss within 1805~1880 MHz	dB	-	2.7	4.0
Amplitude Ripple within 1805~1880 MHz	dB _{p-p}	-	1.9	2.5
Attenuation:				
D.C ~ 1500 MHz	dB	20	25	-
1600 ~ 1710 MHz	dB	22	26	-
1710 ~ 1785 MHz	dB	10	25	-
1920 ~ 3120 MHz	dB	25	28	-
3120 ~ 4000 MHz	dB	20	30	-
VSWR within 1805~1880 MHz	-	-	2.0	2.5

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

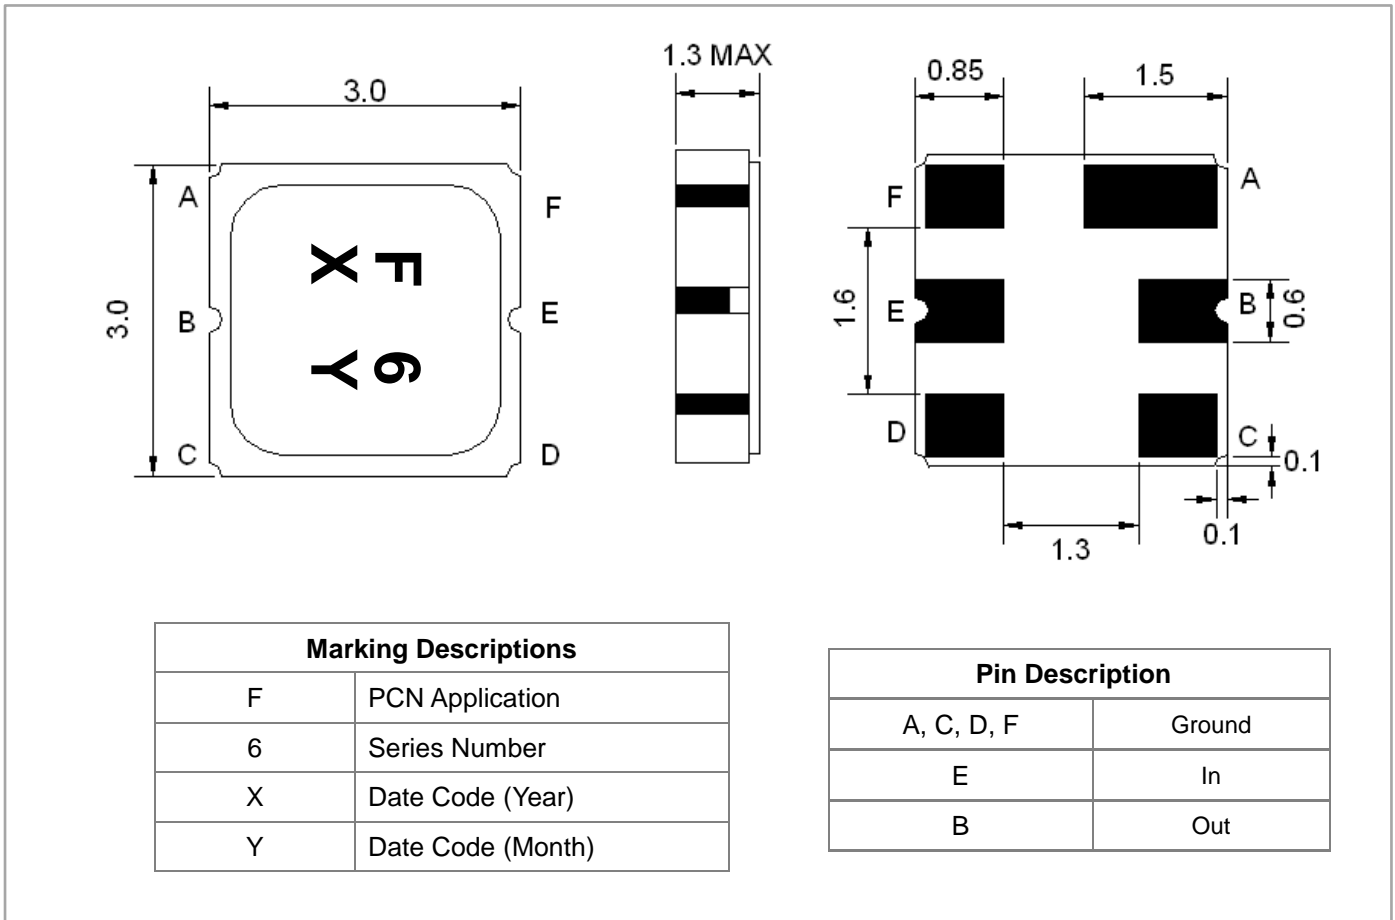



Testing Environment

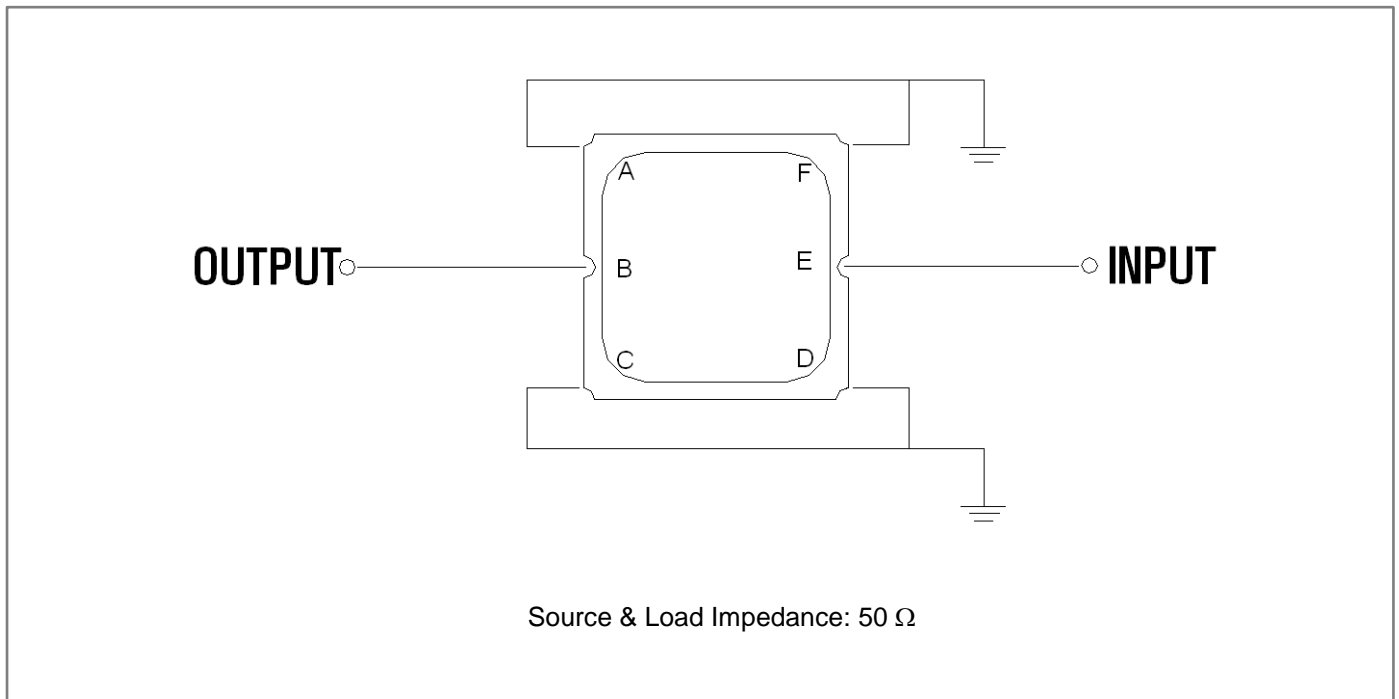

Frequency Characteristics

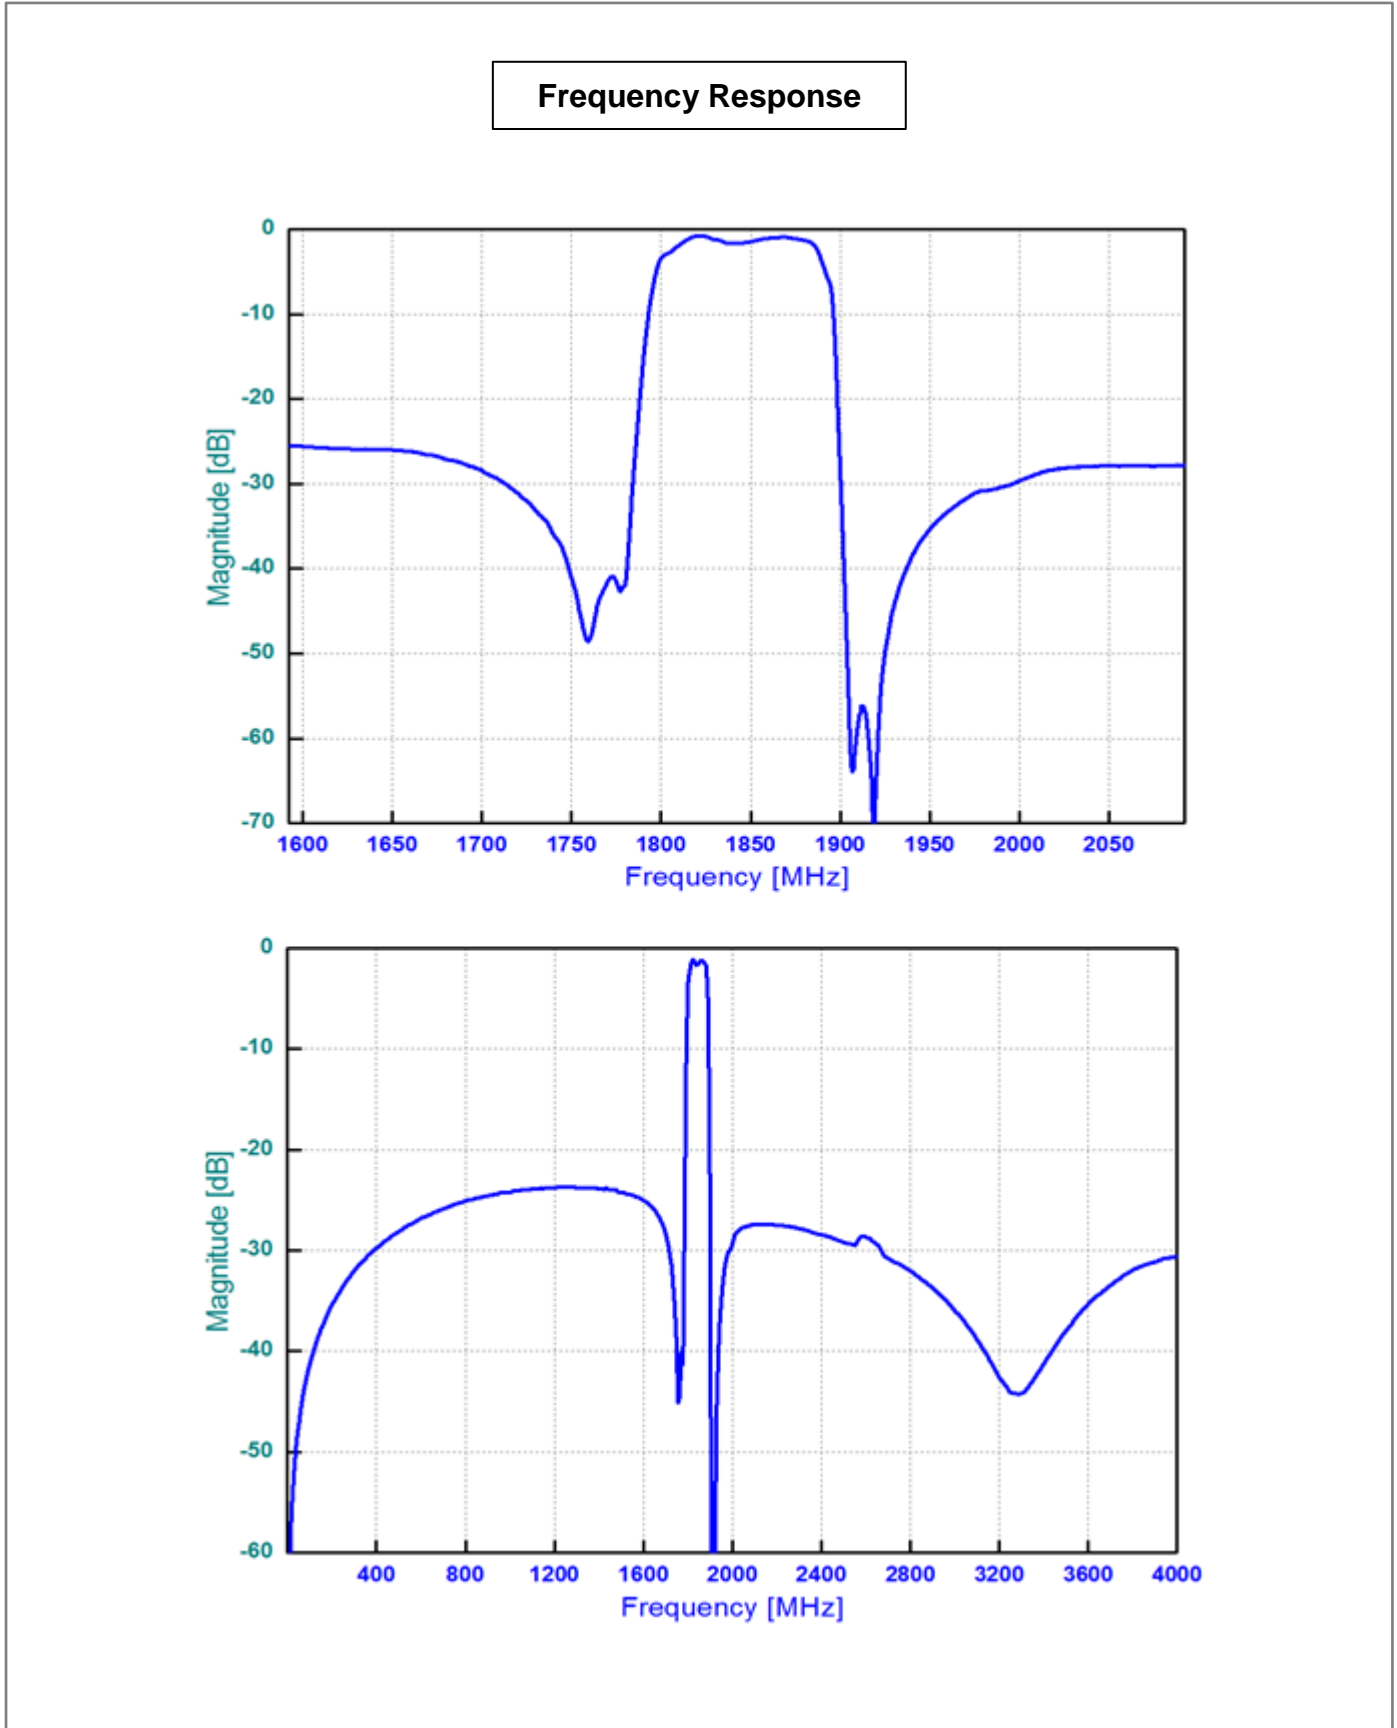

VSWR

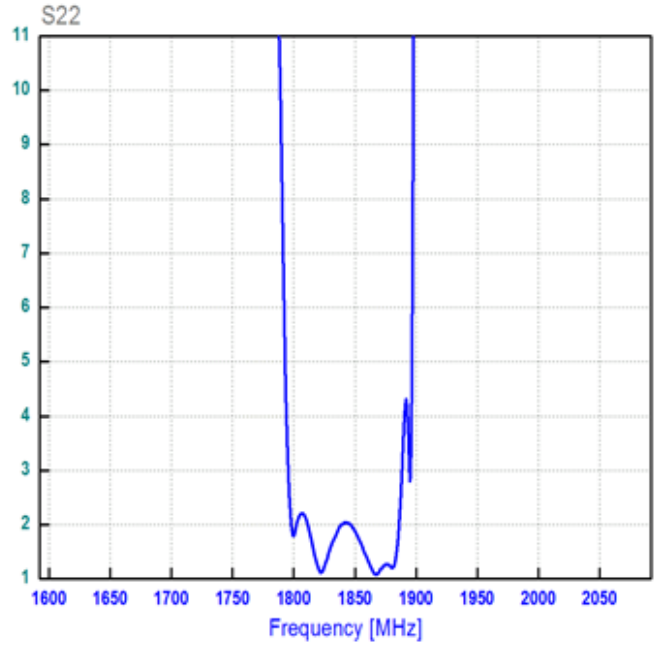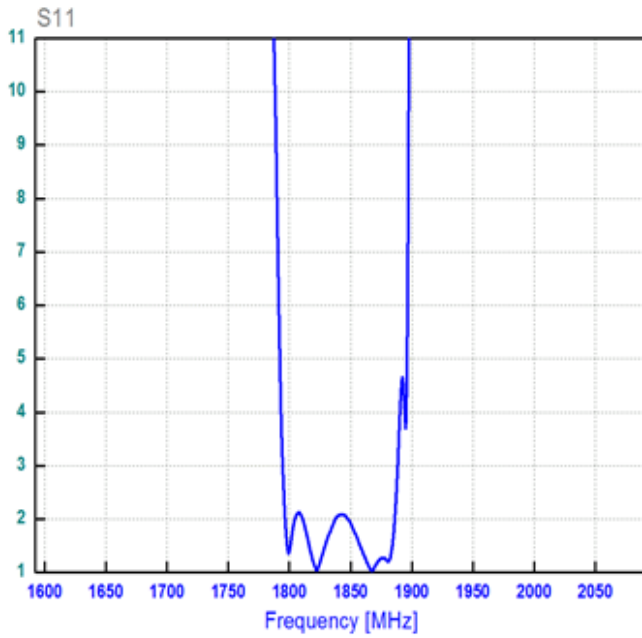

Smith Chart

