

- Remote Control, 1-Port SAW Resonator
- Revision0: March 2005


## Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	12
Maximum Input Power	dBm	-	-	0
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Package type & size	K			
Length x Width	mm <sup>2</sup>	-	5.0 x 5.0	-
Height	mm	-	-	1.4

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fr)	MHz	403.475	403.550	403.625
Insertion Loss	dB	-	0.5	2.0
Unloaded Quality Factor (QU)	-	-	14400	-
Loaded Quality Factor (QL)	-	-	1000	-
Equivalent Elements				
Motional Capacitance (Cm)	fF	-	2.2	-
Motional Inductance (Lm)	μH	-	70.6	-
Motional Resistance (Rm)	Ω	-	12.43	-
Parallel Capacitance (Co)	pF	-	3.68	-
Temp. coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	10	-	40

**Notes:** (1) No Matching Network


## Package Dimensions

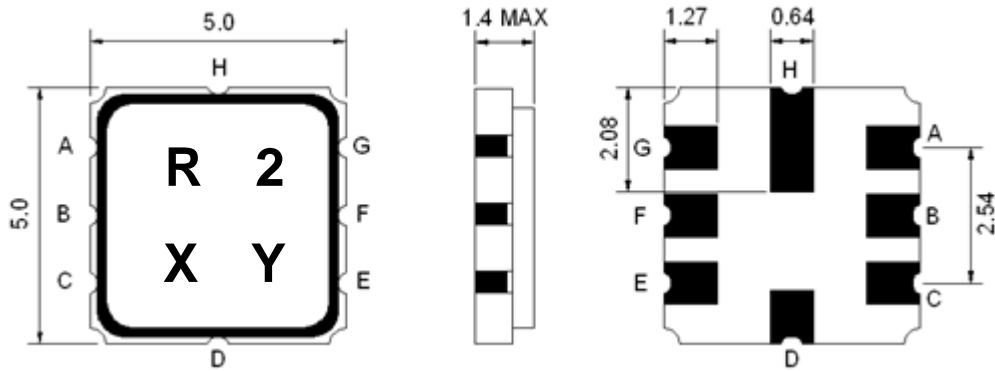

Marking Descriptions	
R	Resonator Application
2	Series Number
X	Date Code (Year)
Y	Date Code (Month)

Pin Description	
A, C, D, E, G, H	Ground
B	In
F	Out

## Testing Environment

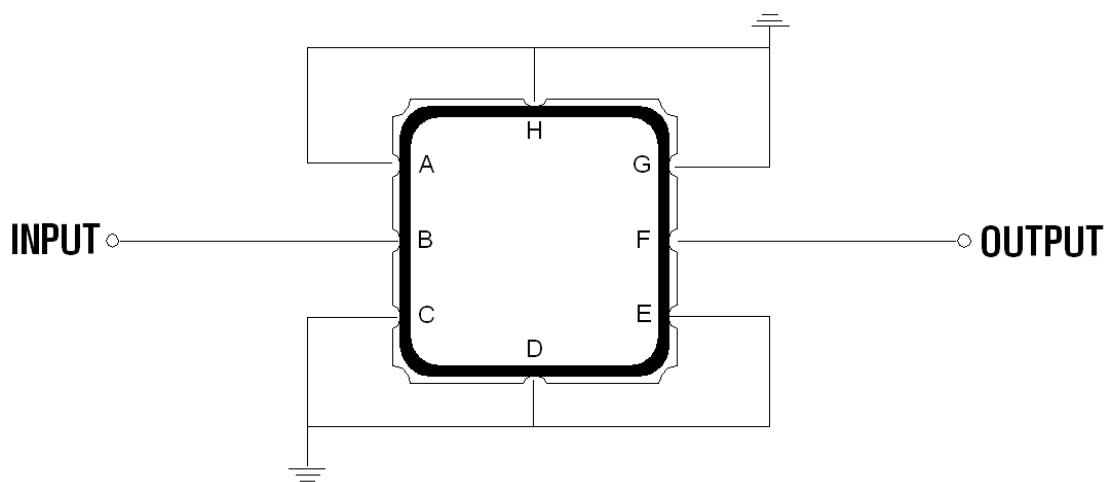

Source & Load Impedance: 50  $\Omega$

## Frequency Characteristics

**Frequency Response**

