


CERAMIC FILTER (MHz band, 3pins)
FEATURES:


- **LOW SPURIOUS TYPE**
- **4.5 / 5.5 / 6.0 / 6.5 MHz ARE AVAILABLE**



PART NUMBER	3dB BAND WIDTH (kHz)	20dB BAND WIDTH (kHz) MAX.	INSERTION LOSS (dB) MAX.	SPURIOUS RESPONSE (dB) MIN.	INPUT/OUTPUT IMPEDANCE(Ω)
LTS4.5MCB	± 60 (± 100)	600 (470)	6 (3.2)	30 (0~4.5MHz)	1000
LTS5.5MCB	± 60 (± 115)	600 (500)	6 (3.6)	30 (0~5.5MHz)	600
LTS6.0MCB	± 60 (± 115)	600 (500)	6 (4.0)	30 (0~6.0MHz)	470
LTS6.5MCB	± 70 (± 115)	650 (530)	6 (3.6)	30 (0~6.5MHz)	470
LTS4.5MDB	± 70 (± 130)	750 (520)	6 (3.0)	30 (0~4.5MHz)	1000
LTS5.5MDB	± 80 (± 150)	750 (640)	6 (3.0)	30 (0~5.5MHz)	600
LTS6.0MDB	± 80 (± 155)	750 (640)	6 (3.8)	30 (0~6.0MHz)	470
LTS6.5MDB	± 80 (± 150)	800 (640)	6 (3.4)	30 (0~6.5MHz)	470
LT4.5MB	± 60 (± 105)	530 (420)	6 (4)	20 (within 4.5+ 0.8/-1.0MHz)	1000
LT5.5MB	± 75 (± 120)	550 (470)	6 (3)	25 (within 5.5+ 1.0MHz)	600
LT6.0MB	± 80 (± 130)	600 (500)	6 (2.5)	25 (within 6.0+ 1.0MHz)	470
LT6.5MB	± 80 (± 130)	630 (530)	6 (2.5)	25 (within 6.5+ 1.0MHz) 30 (within 6.5+ 1.0MHz)	470

■ PACKAGE DIMENSIONS
LTS


- (1) INPUT
(2) GROUND
(3) OUTPUT
Unit: mm

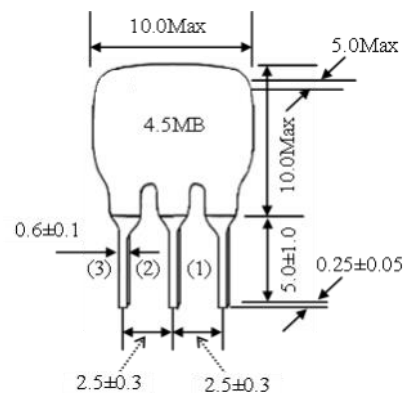LT


- (1) INPUT
(2) GROUND
(3) OUTPUT
Unit: mm

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.