

CERAMIC FILTER (MHz band, 4pins)


FEATURES:

- LOW SPURIOUS TYPE
- 4.5 / 5.5 / 6.0 / 6.5 MHz ARE AVAILABLE



PART NUMBER	3dB BAND WIDTH (kHz)	20dB BAND WIDTH (kHz) MAX.	INSERTION LOSS (dB) MAX.	SPURIOUS RESPONSE (dB) MIN.	INPUT/OUTPUT IMPEDANCE(Ω)
LTT4.5MA	± 40	370	10.0	40	1000
LTT4.72MA	± 40	370	10.0	40	1000
LTT5.5MA	± 50	350	9.0	50	600
LTT5.74MA	± 50	350	9.0	50	600
LTT6.0MA	± 50	400	9.0	50	470
LTT6.25MA	± 50	400	9.0	50	470
LTT6.5MA	± 50	400	9.0	50	470
LTT6.74MA	± 50	400	9.0	50	470

■ PACKAGE DIMENSIONS

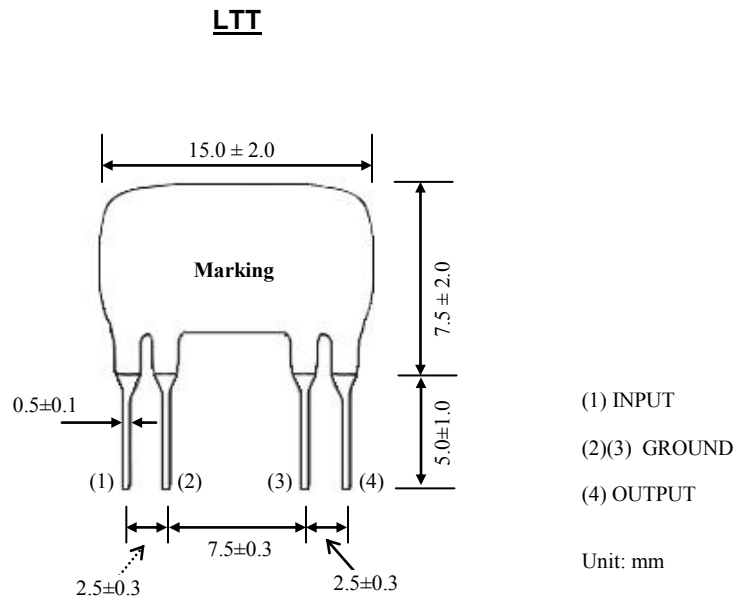

Transko Electronics, Inc reserves the right to make changes to the product (s), service (s), and specification (s) described herein without notice. See "Terms of Sale" for details on our website.