

- 70.0 MHz IF SAW Filter / 14.0 MHz Bandwidth
- Revision 0: 27 Dec. 2007


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	69.90	70.00	70.10
Insertion Loss at Fo	dB	-	21.0	24.0
Amplitude Ripple Variation at Fo ±7.0 MHz	dB _{p-p}	-	0.55	1.0
Group Delay Variation at Fo ±7.0 MHz	nsec	-	50	100
Absolute Delay at Fo	µsec	-	2.34	-
Temperature Coefficient	ppm/°C	-	-72	-
Bandwidth at -1.0 dB	MHz	-	14.82	-
Bandwidth at -3.0 dB	MHz	14.90	15.15	-
Bandwidth at -40.0 dB	MHz	-	16.48	16.80
Lower Sidelobe	dB	50	55	-
Upper Sidelobe	dB	50	55	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

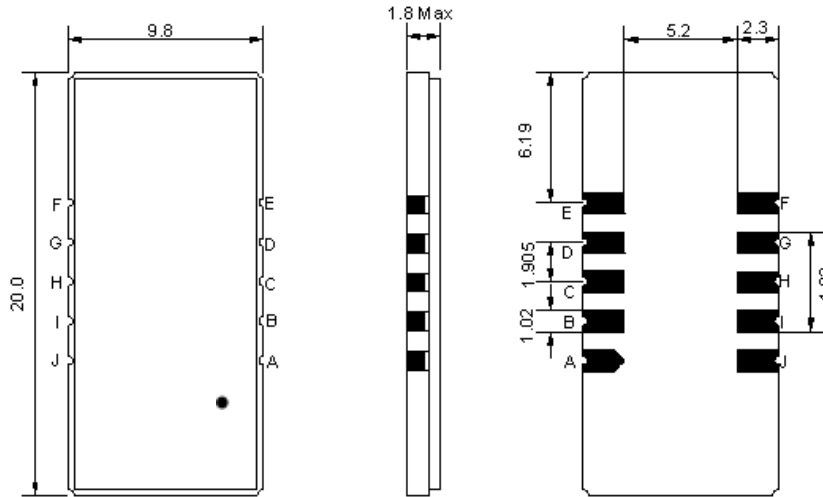

- ① **TRANSKO:** Brand
- ② **TA07014A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

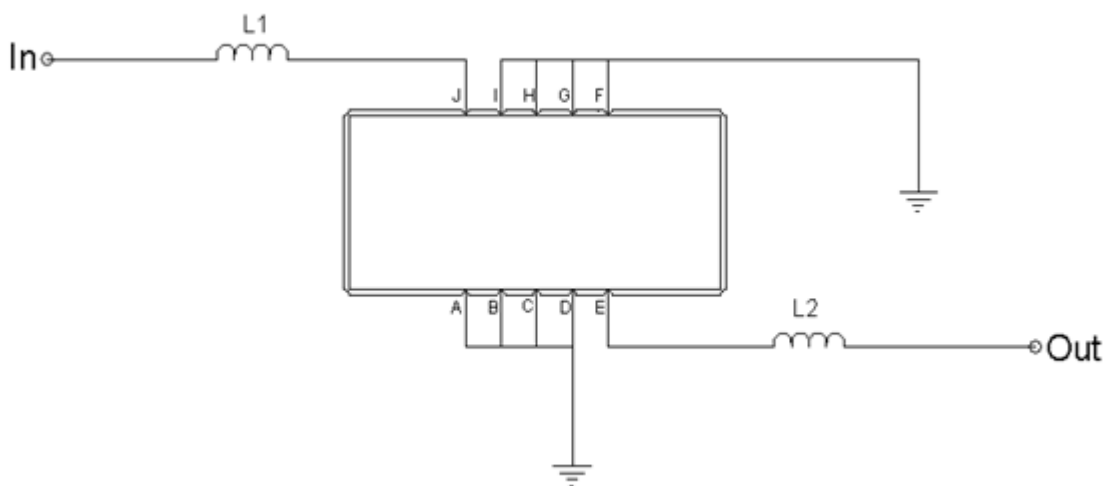


Test Fixture & Values	
Input	L1=180nH
Output	L2=100nH
Source/Load Impedance	50 Ω


Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

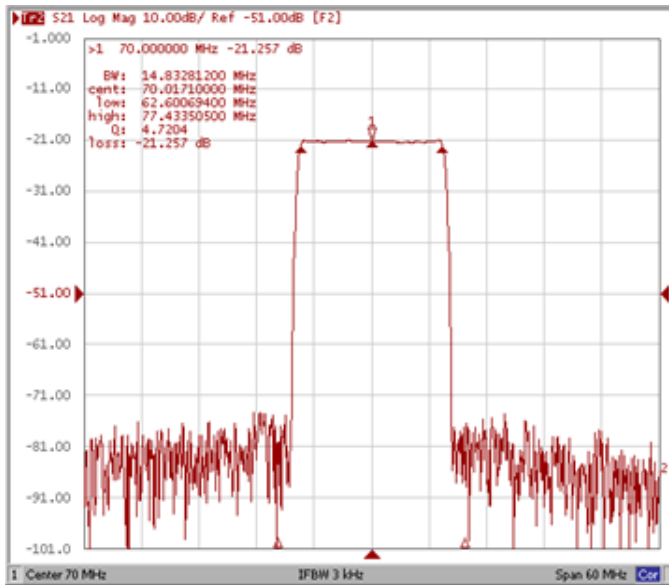


Bandwidth at -3.0 dB

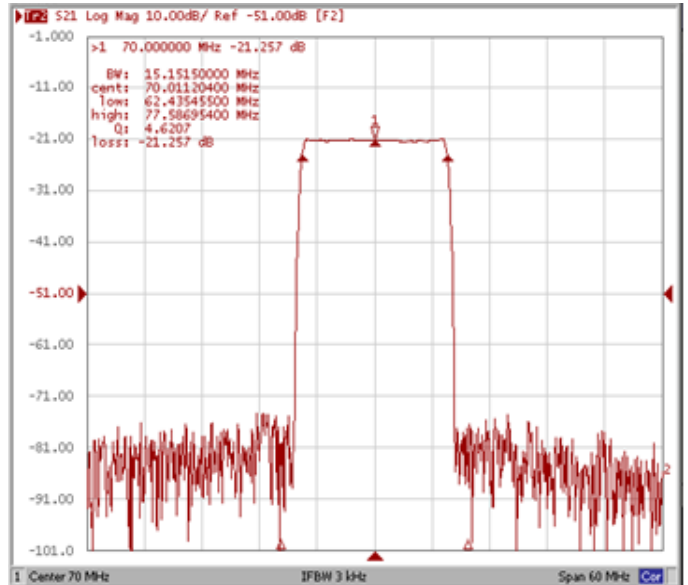

Bandwidth at -40.0 dB

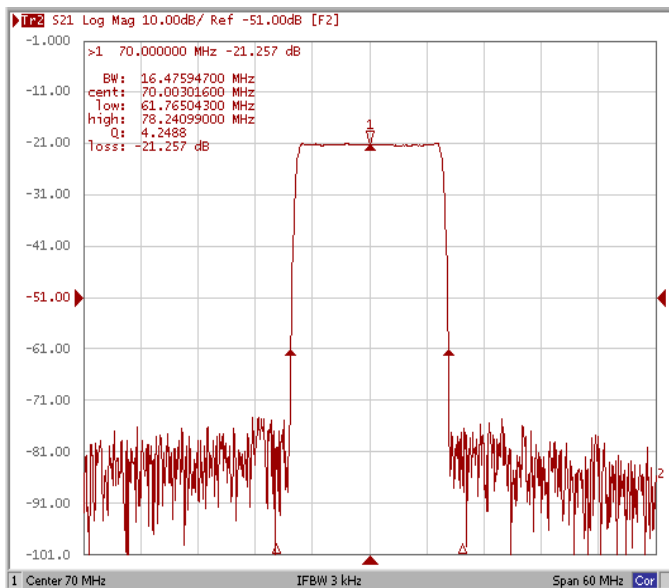


Wide Band

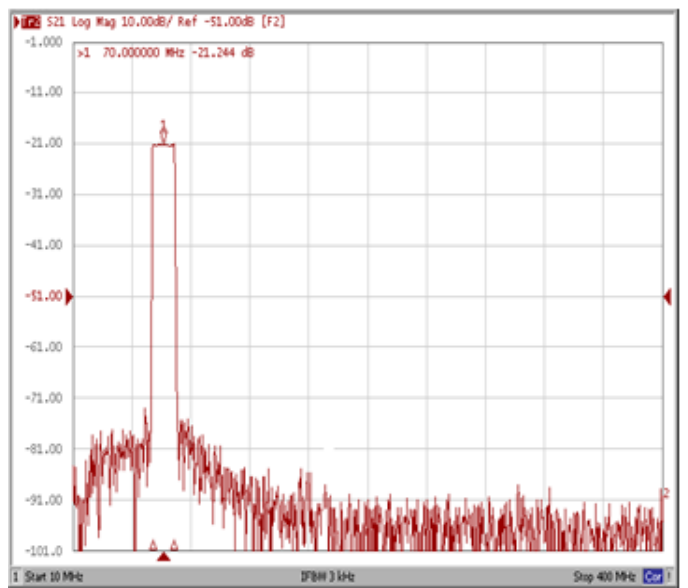


Frequency Response


Ripple Variation Fo ±7.0 MHz

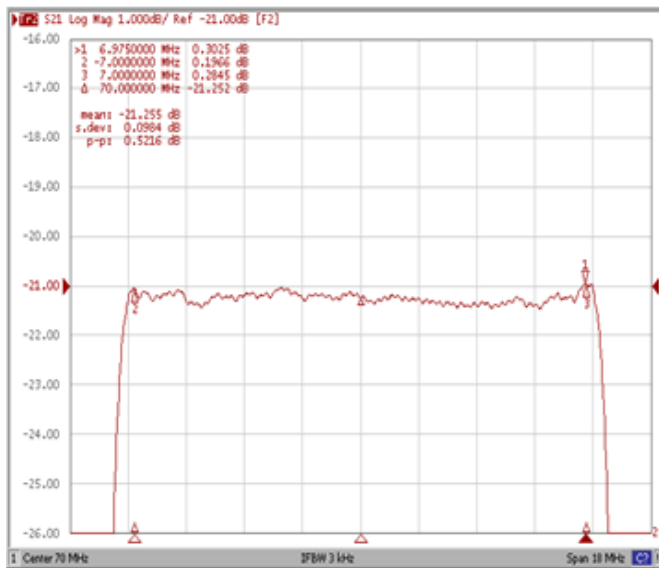

Group Delay Variation Fo ±7.0 MHz

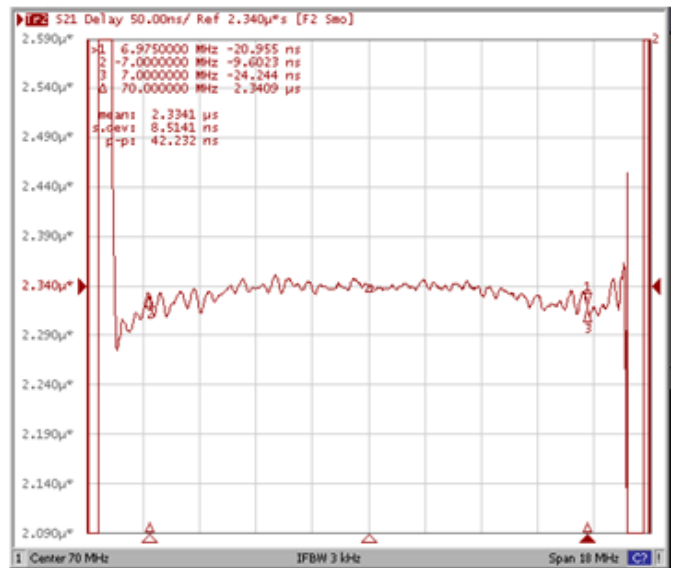

Smith Chart

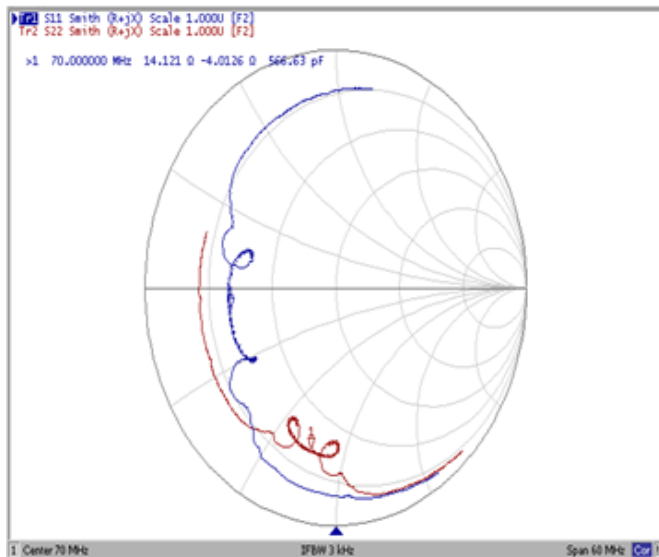

VSWR

