

- 75.0 MHz IF SAW Filter / 9.82 MHz Bandwidth
- Revision 0: 19 Nov. 2008


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	75.00	-
Insertion Loss at Fo	dB	-	19.7	22.0
Group Delay Variation (Fo±4.6MHz)	ns	-	60	120
Absolute Delay	us	-	2.4	-
Passband Ripple (Fo±4.6MHz)	dB	-	0.42	0.9
Bandwidth at -1dB	MHz	-	9.82	-
Bandwidth at -55dB	MHz	-	11.90	-
Ultimate Attenuation(65.1MHz~69MHz)	-	50	55	-
Ultimate Attenuation(81MHz~84.9MHz)	-	50	60	-
Temperature coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

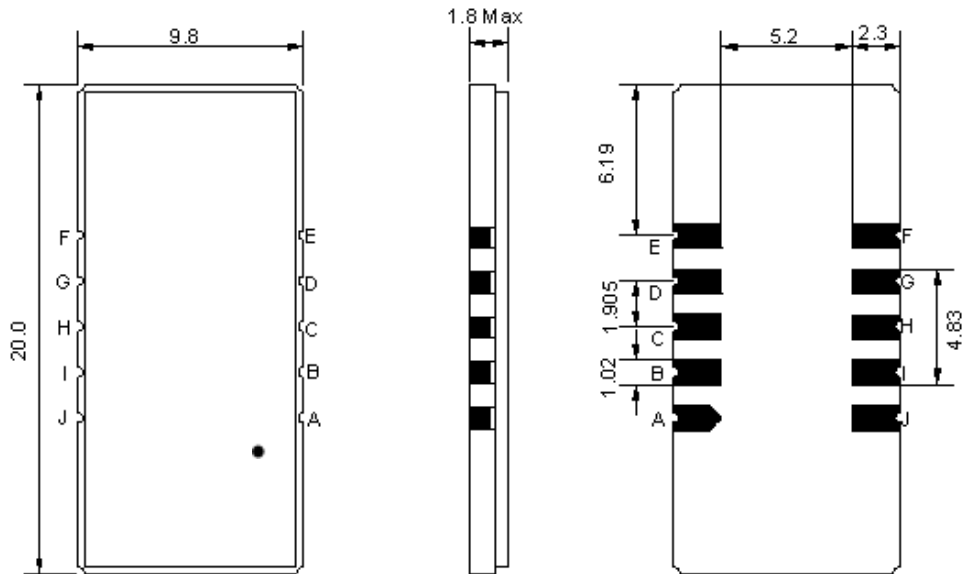

- ① **TRANSKO:** Brand
- ② **TA07509A:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

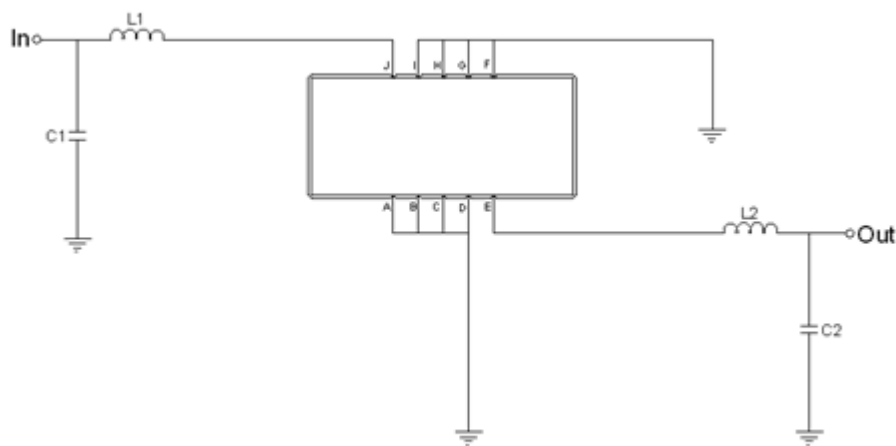



Test Fixture & Values	
Input	L1=33nH, C1=10pF
Output	L2=33nH, C2=10pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -55.0 dB

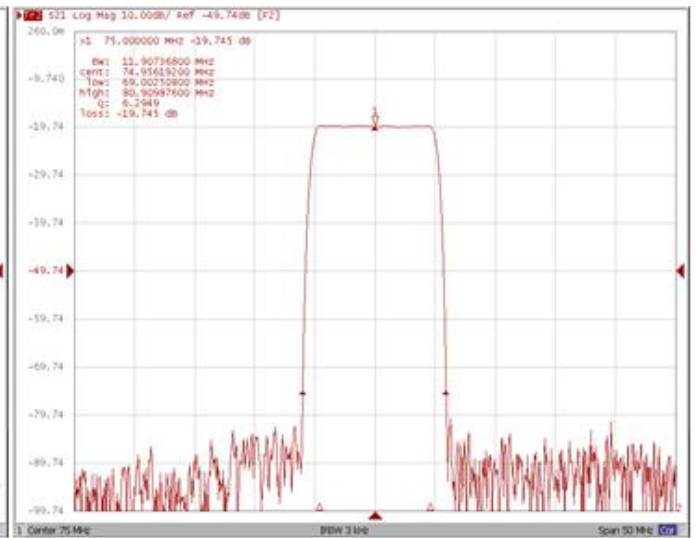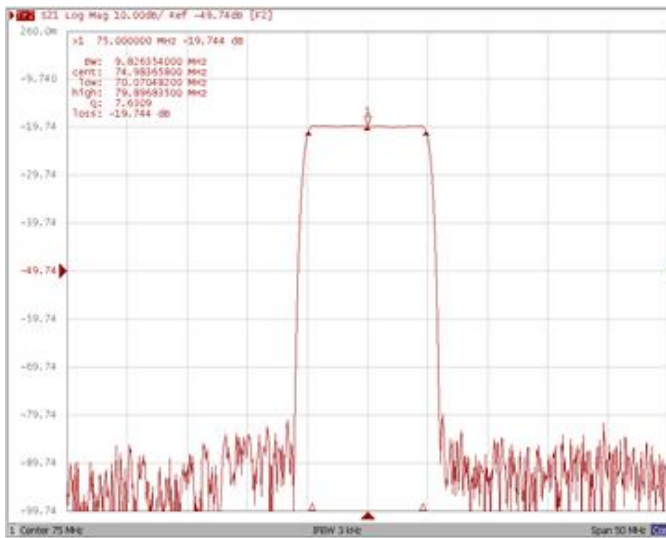

Ultimate Attenuation



Wide Band

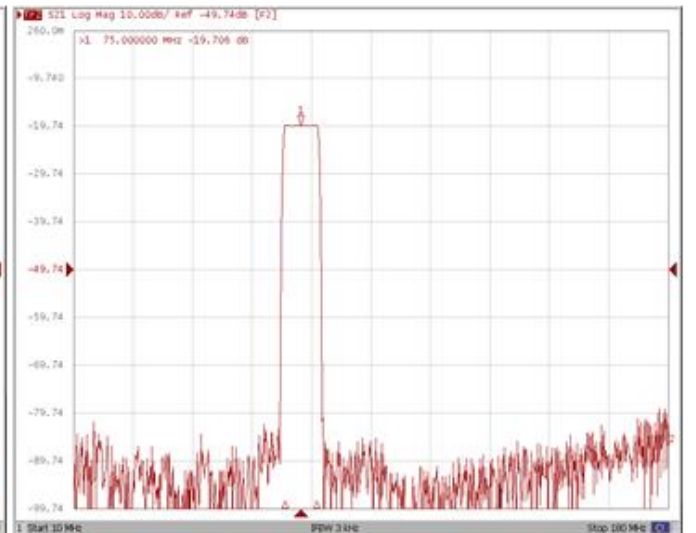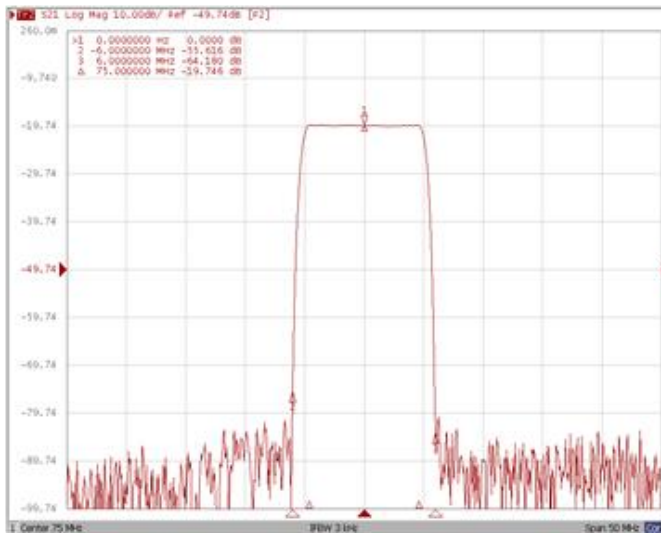

Frequency Response

Ripple Variation Fo±4.6MHz

Group Delay Variation Fo±4.6MHz

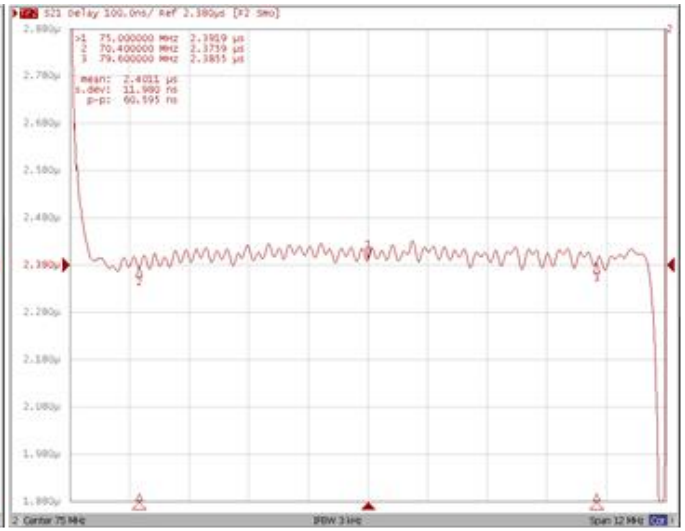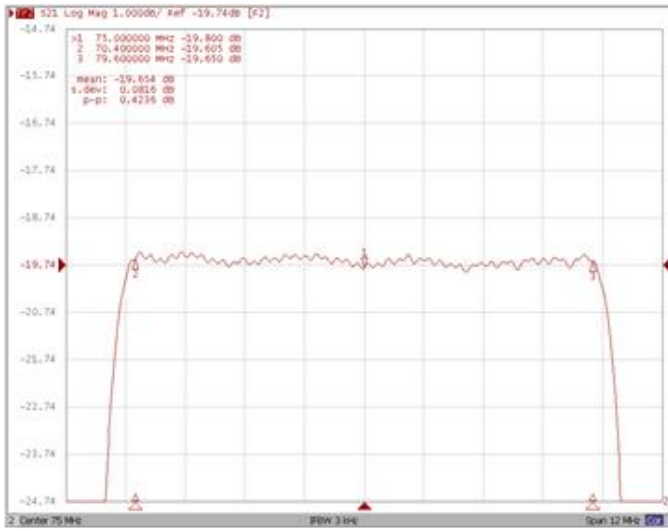

Smith Chart

VSWR

