

- 80.1 MHz IF SAW Filter / 20.10 MHz Bandwidth
- Revision 0: 09. Feb. 2009


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-30	-	80
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	79.95	80.10	80.25
Insertion Loss at Fo	dB	-	21.3	23.0
Group Delay Variation (Fo±9.22MHz)	ns	-	35	60
Absolute Delay	us	-	2.38	-
Passband Ripple (Fo±9.22MHz)	dB	-	0.75	1.00
Bandwidth at -1dB	MHz	19.30	20.10	-
Bandwidth at -3dB	MHz	-	20.45	-
Bandwidth at -20dB	MHz	-	21.36	21.56
Bandwidth at -40dB	MHz	-	21.80	-
Ultimate Rejection	dB	50	52	-
Temperature coefficient	ppm/°C	-	-72	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

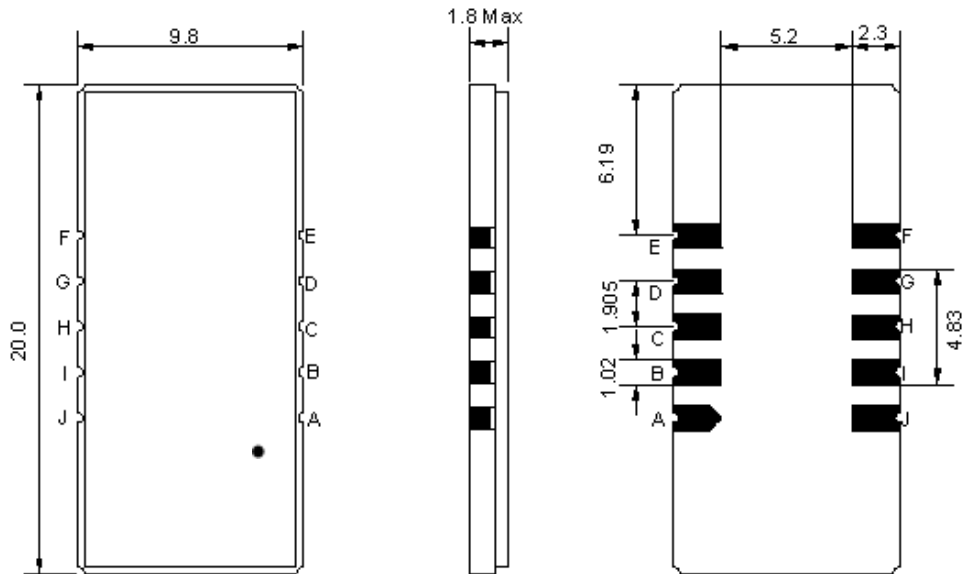

- ① **TRANSKO:** Brand
- ② **TA08020B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

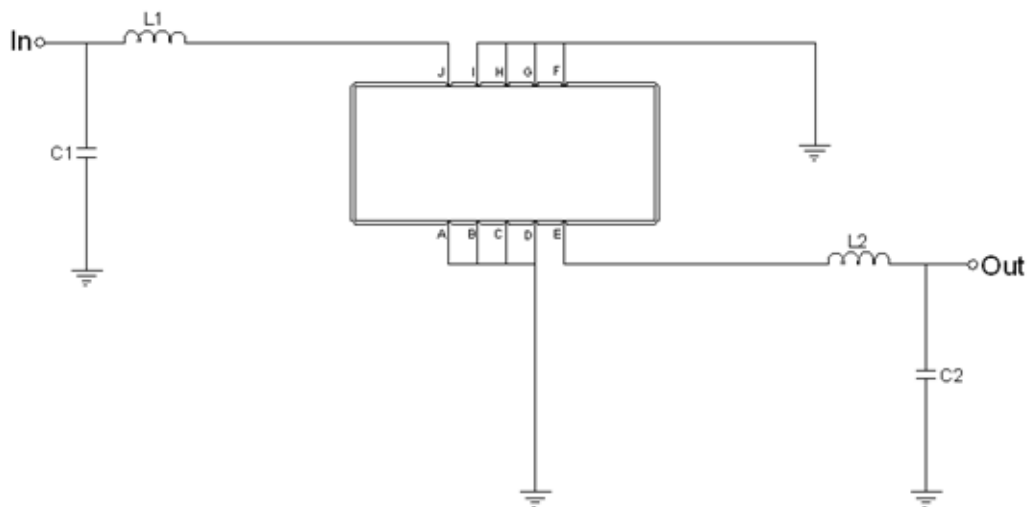



Test Fixture & Values	
Input	L1=150nH, C1=13pF
Output	L2=56nH, C2=100nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

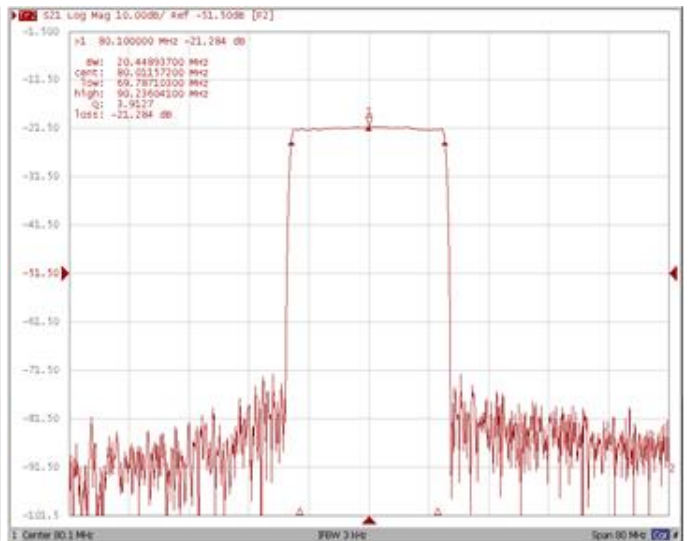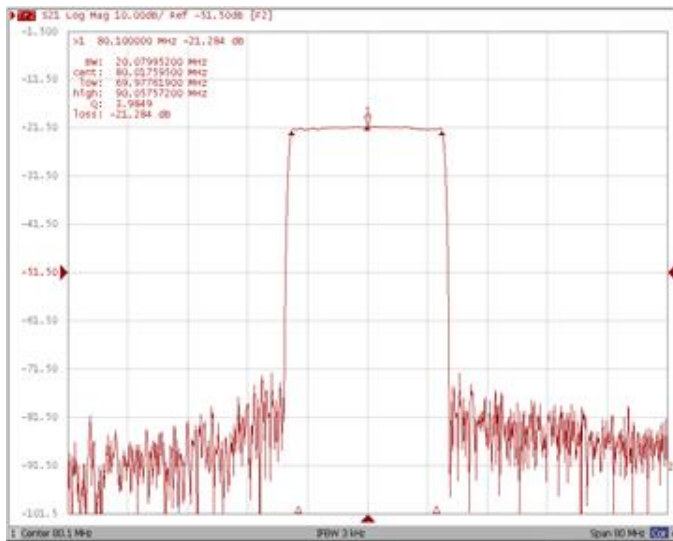

Bandwidth at -20.0 dB


Bandwidth at -40.0 dB

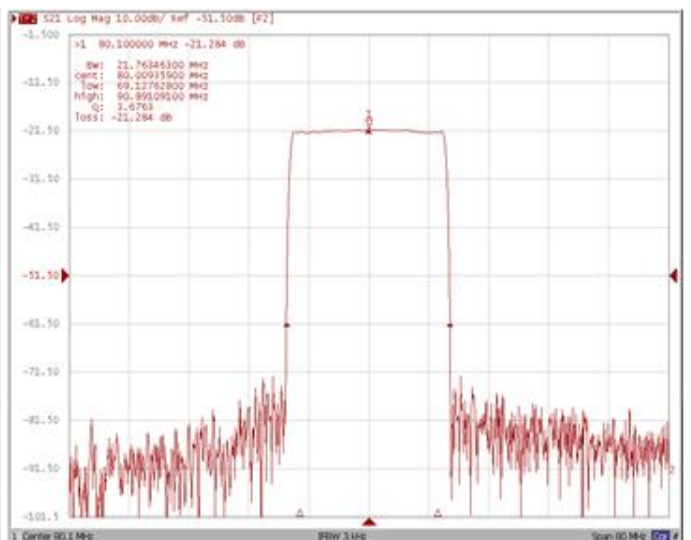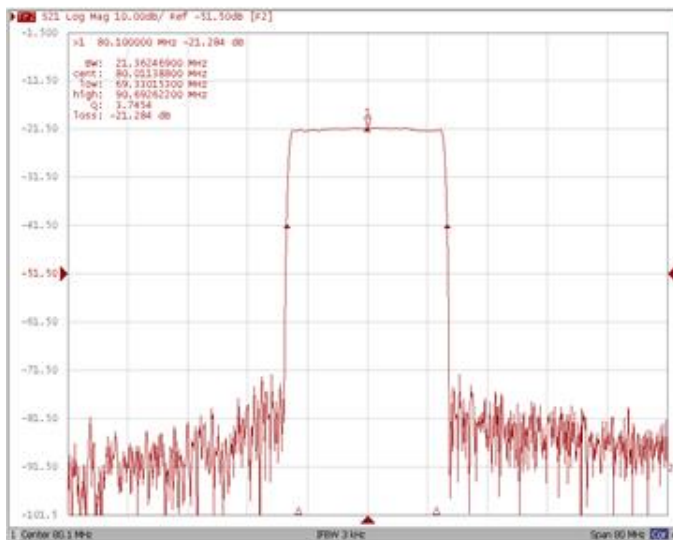

Frequency Response

Ripple Variation Fo±9.22MHz

Group Delay Variation Fo±9.22MHz

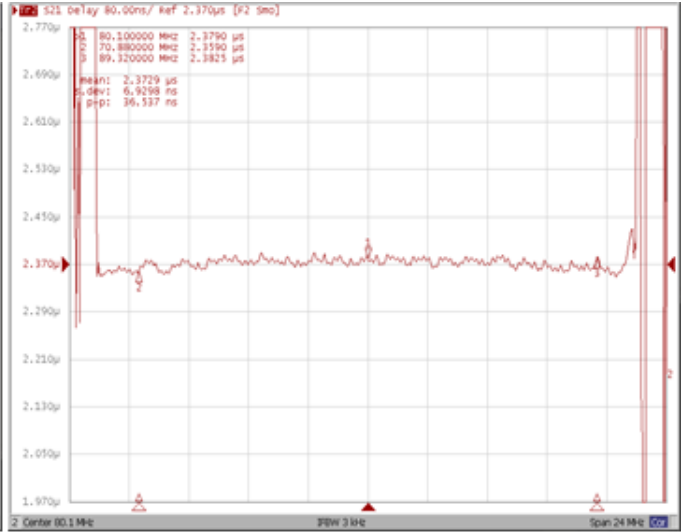

Smith Chart

VSWR

