

- 160.0 MHz IF SAW Filter / 1.26 MHz Bandwidth
- Revision 1: 29. Oct. 2007


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-40	-	85
Storage Temperature Range	°C	-60	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D			
Length x Width	mm ²	-	20.2x12.6	-
Height	mm	-	-	5.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	159.90	160.0	160.10
Insertion Loss at Fo	dB	-	19.0	22.0
Group Delay Variation (Fo±0.63MHz)	nsec	-	180	300
Absolute Delay at Fo	usec	-	2.5	-
Passband Ripple Variation (Fo±0.5MHz)	dB	-	0.6	1.0
Bandwidth at -1.5dB	MHz	1.26	1.35	-
Bandwidth at -3dB	MHz	1.40	1.50	-
Bandwidth at -35dB	MHz	-	2.25	2.40
Bandwidth at -50dB	MHz	-	2.38	2.50
Rejection (162~167MHz)	dB	50	55	-
Ultimate Rejection (Fo-9MHz~Fo-2MHz, Fo+2MHz~Fo+9MHz)	dB	50	55	-
Substrate Material	-	-	LN	-
Ambient Temperature	°C	-	25	-


Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.

Package Dimensions

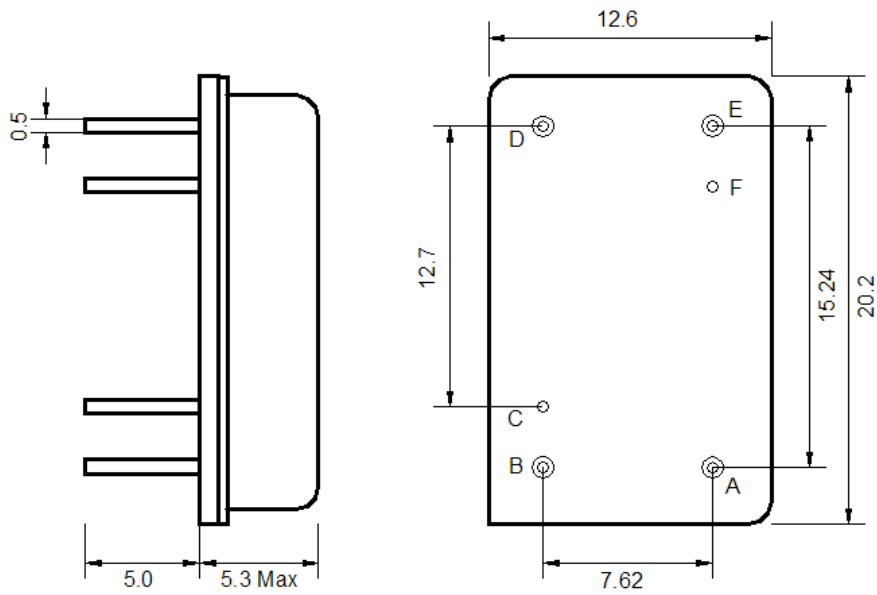

Pin Description	
B, C, E, F	Ground
A	Input
D	Output

Testing Environment

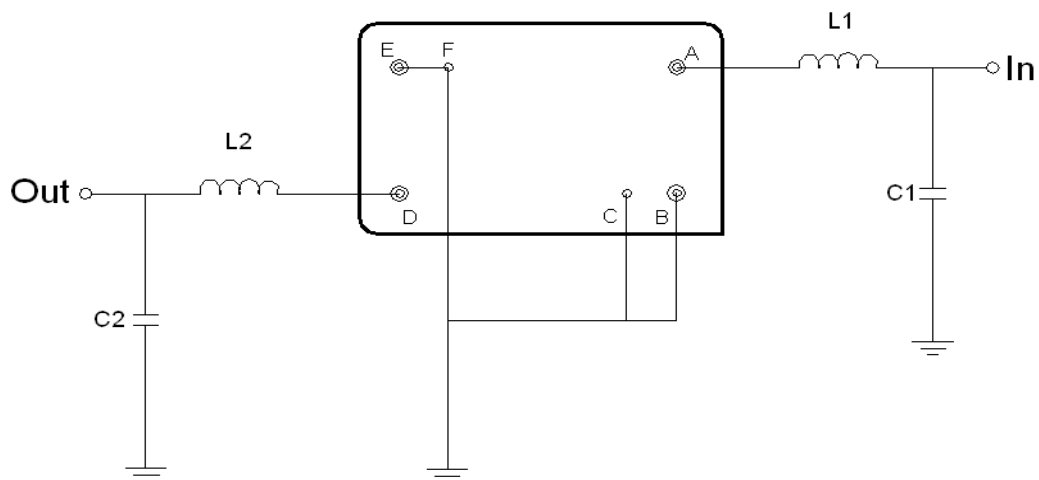

Test Fixture & Values	
Input	L1 = 56 nH, C1 = 30 pF
Output	L2 = 56 nH, C2 = 15 pF
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response

