

- 190.0 MHz IF SAW Filter / 26.40 MHz Bandwidth
- Revision 0: 06. May 2009


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operation Temperature Range	°C	-10	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	D1			
Length x Width	mm ²	-	20.0 x 9.8	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	190.0	-
Insertion Loss at Fo	dB	-	29.30	30.80
Group Delay Variation (Fo±12.5MHz)	nsec	-	20	50
Absolute Delay	usec	-	2.40	2.50
Passband Ripple (Fo±12.5MHz)	dB	-	0.55	1.00
Bandwidth at -1dB	MHz	26.25	26.43	-
Bandwidth at -3dB	MHz	-	26.87	-
Bandwidth at -40dB	MHz	-	28.68	28.85
Bandwidth at -50dB	MHz	-	28.85	-
Ultimate Rejection	dB	50	55	
Temperature coefficient	ppm/°C	-	-20	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

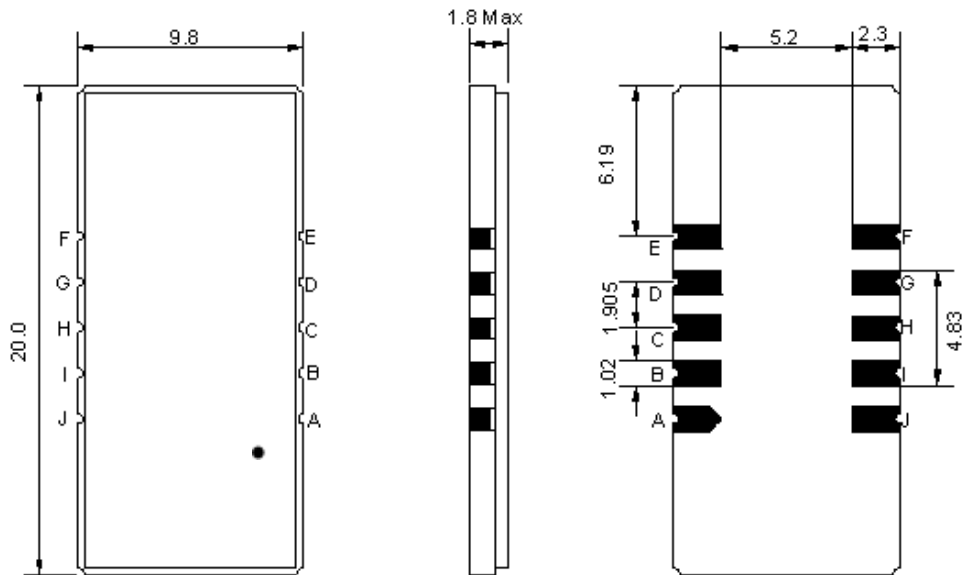

- ① **TRANSKO:** Brand
- ② **TA19026B:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

Testing Environment

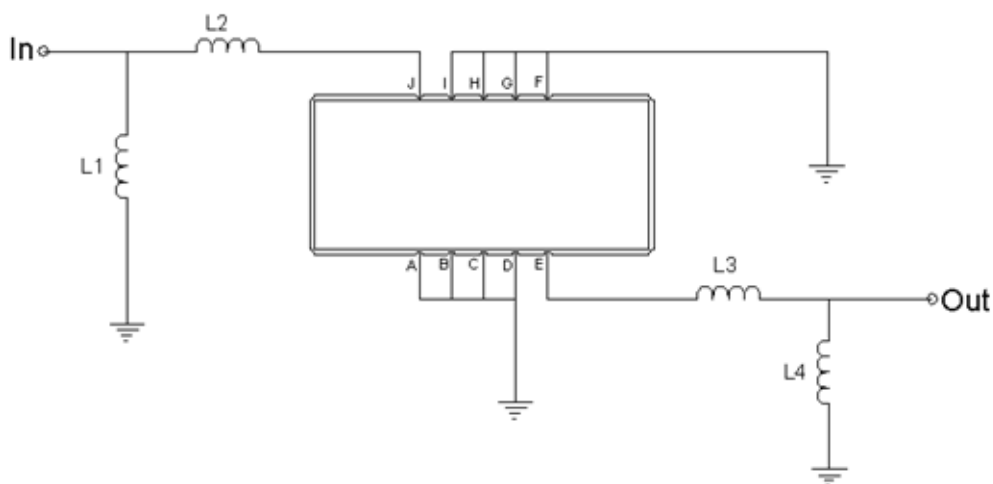



Test Fixture & Values	
Input	L1=15nH, L2=10nH
Output	L3=10nH, L4=18nH
Source/Load Impedance	50 Ω

Frequency Characteristics

Frequency Response



Bandwidth at -1.0 dB

Bandwidth at -3.0 dB

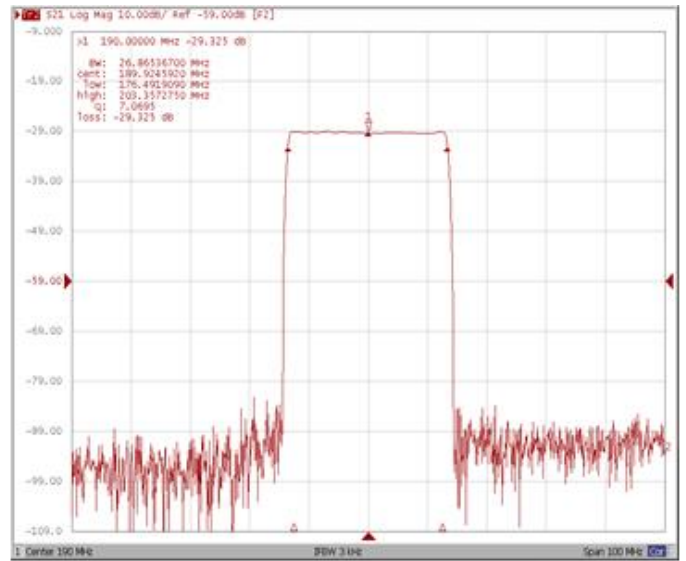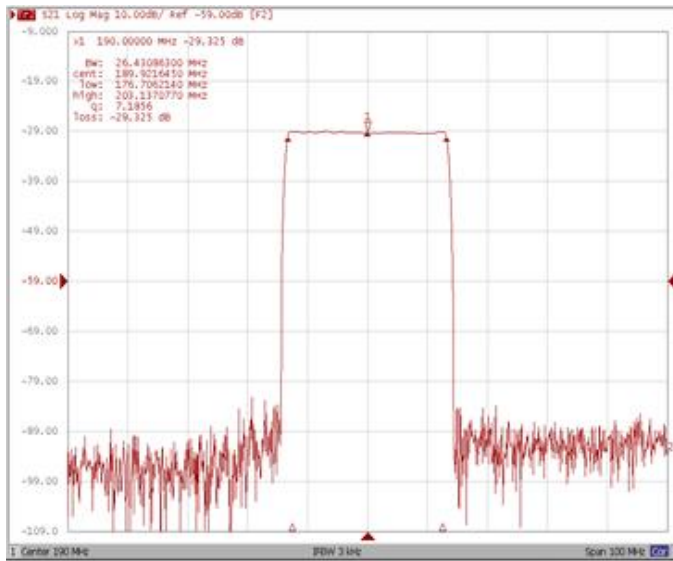


Bandwidth at -40.0 dB

Bandwidth at -50.0 dB

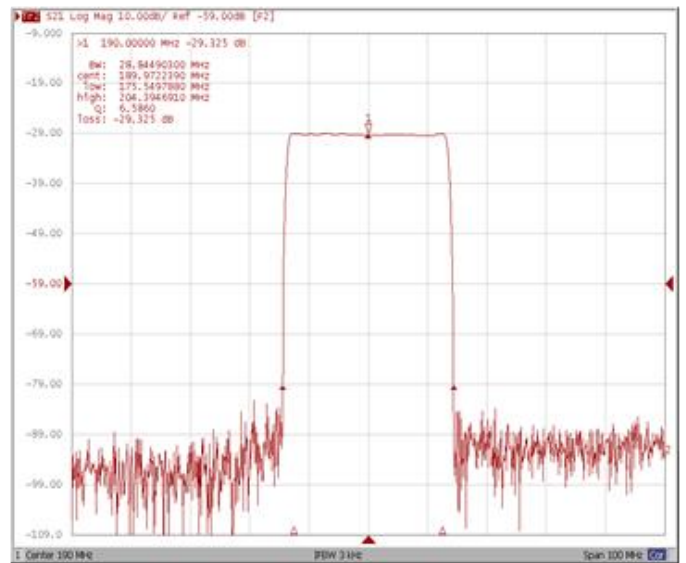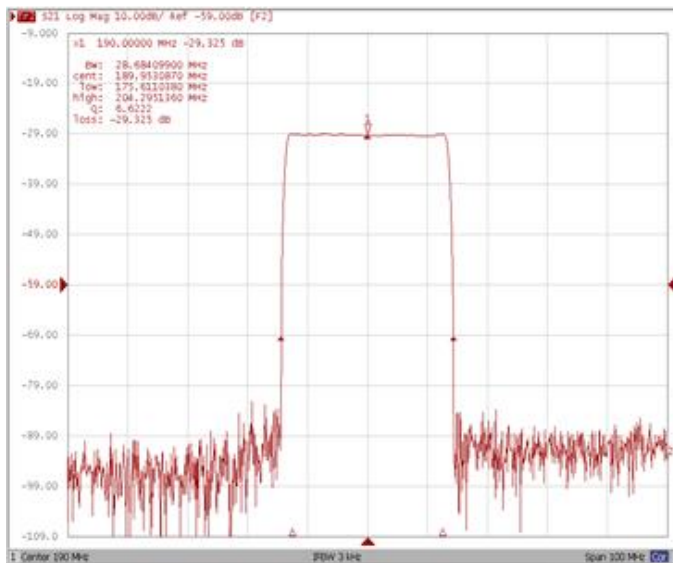


Frequency Response


Ripple Variation $F_0 \pm 12.5\text{MHz}$

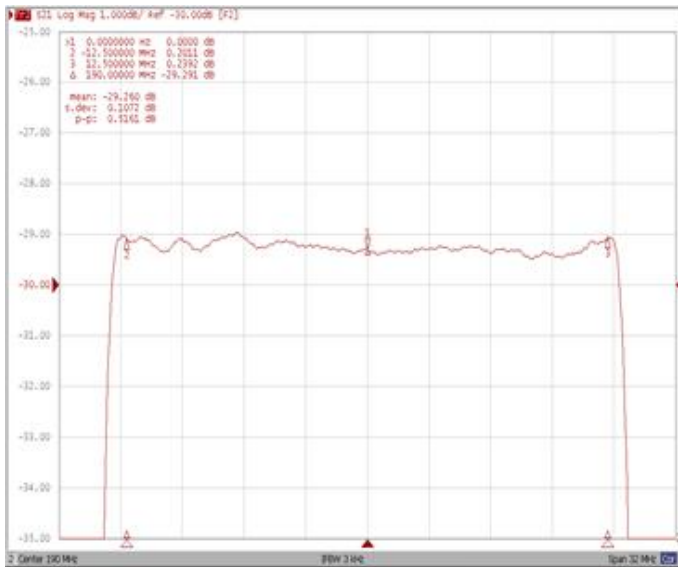

Group Delay Variation $F_0 \pm 12.5\text{MHz}$

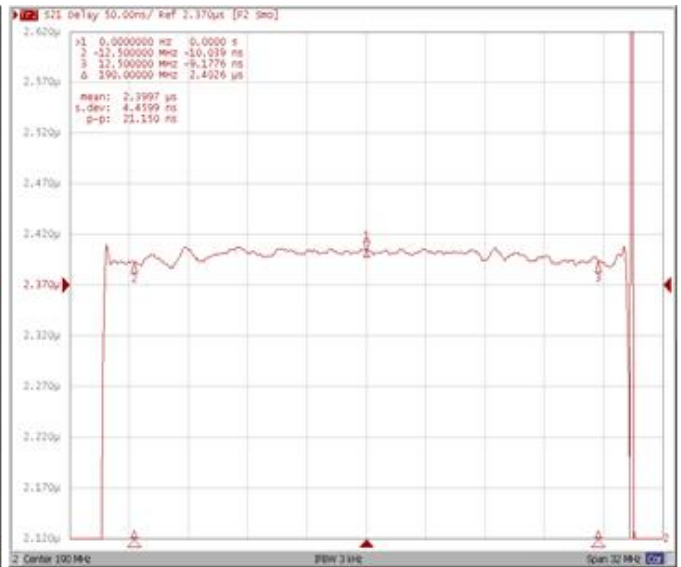

Smith Chart

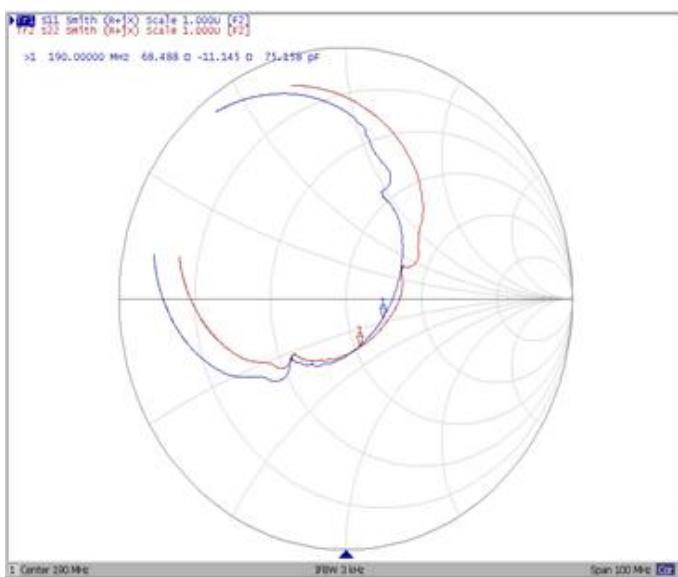

VSWR

