

- 62.50 MHz IF SAW Filter / 6.62 MHz Bandwidth
- Revision 0: 18 Jan. 2012


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	V			
Length x Width	mm ²	-	13.3 x 6.5	-
Height	mm	-	-	1.8

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	62.50	-
Insertion Loss at Fo	dB	-	9.6	13.0
Temperature Coefficient	ppm/°C	-	-86	-
Group Delay Variation at Fo±2.4MHz	nsec	-	69	100
Absolute Delay at Fo	usec	-	0.95	-
Passband Ripple at Fo±2.4MHz	dB	-	0.37	0.8
Bandwidth at -1dB	MHz	6.0	6.62	-
Bandwidth at -3dB	MHz	-	7.62	-
Bandwidth at -30dB	MHz	-	10.40	10.80
Ultimate Rejection	dB	-	42	-
VSWR Input	-	-	3.5	-
VSWR Output	-	-	5.5	-

Notes : (1) With Matching Network (Ref. Testing Environment Circuit as shown below).
Those impedances could be modified with different impedance values and/or structures, if necessary.


Package Dimensions

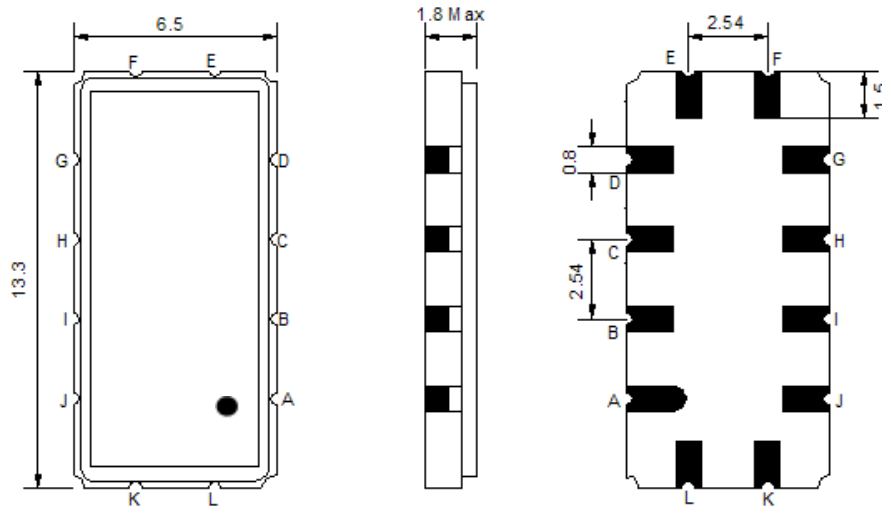

- ① **TRANSKO:** Brand
- ② **TL06206C:** Model Name
- ③ **X :** Date Code (Year)
- ④ **Y :** Date Code (Month)
- ⑤ **Z :** Date Code (Date)
- : Index Dot

Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Testing Environment

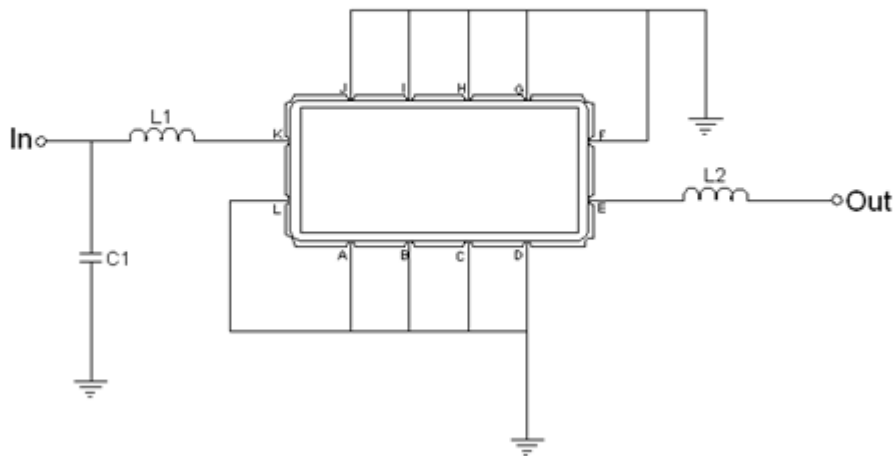


Test Fixture & Values	
Input	L1 = 180 nH , C1 = 82 pF
Output	L2 = 68 nH
Source/Load Impedance	50 Ω


Frequency Characteristics

Frequency Response


Bandwidth at -1.0 dB

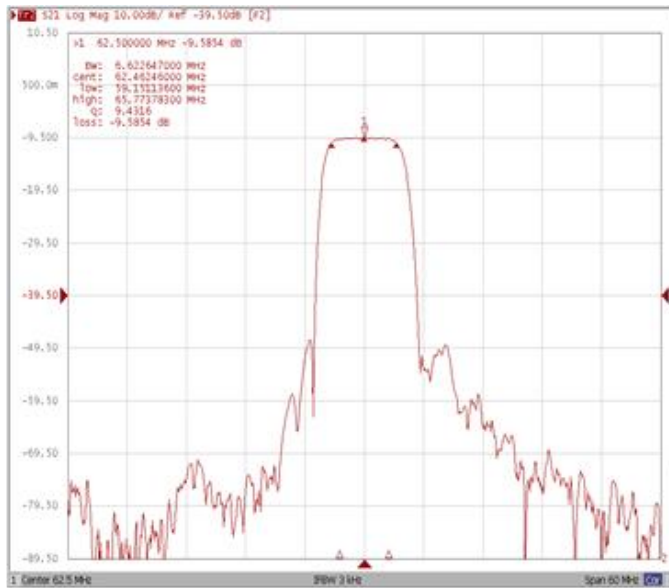


Bandwidth at -3.0 dB

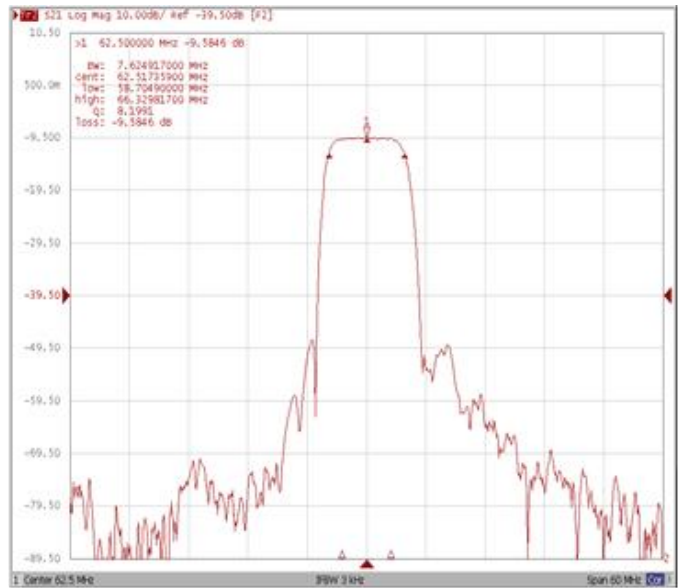

Bandwidth at -30.0 dB

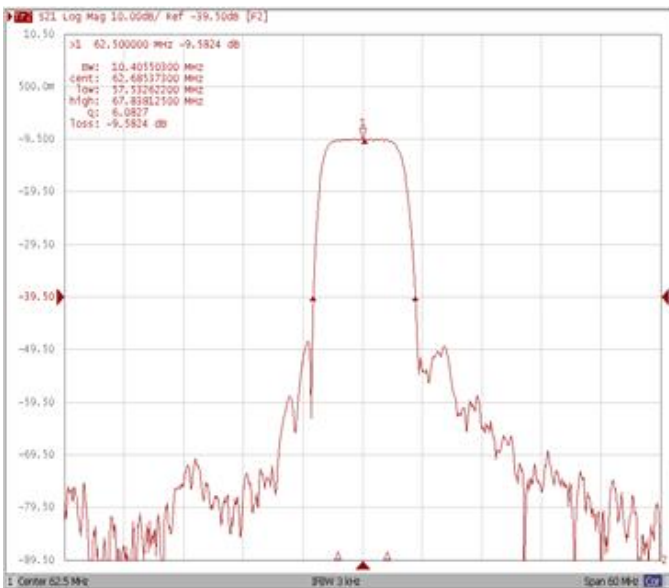


WIDE

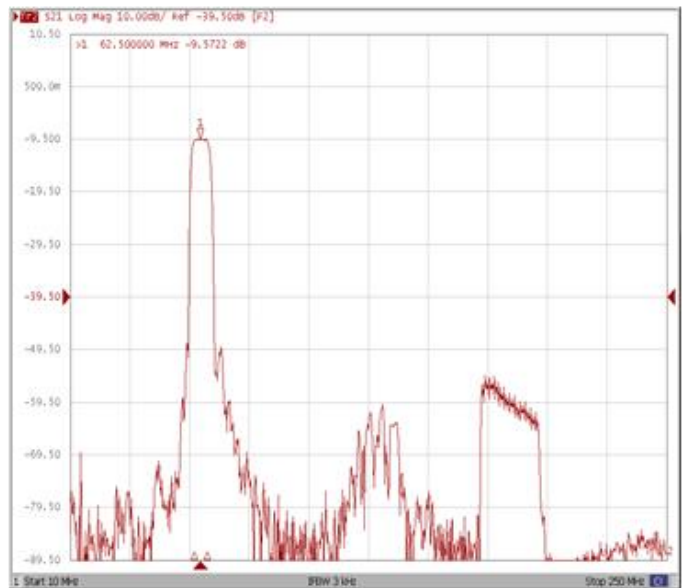


Frequency Response


Ripple Variation Fo±2.40MHz

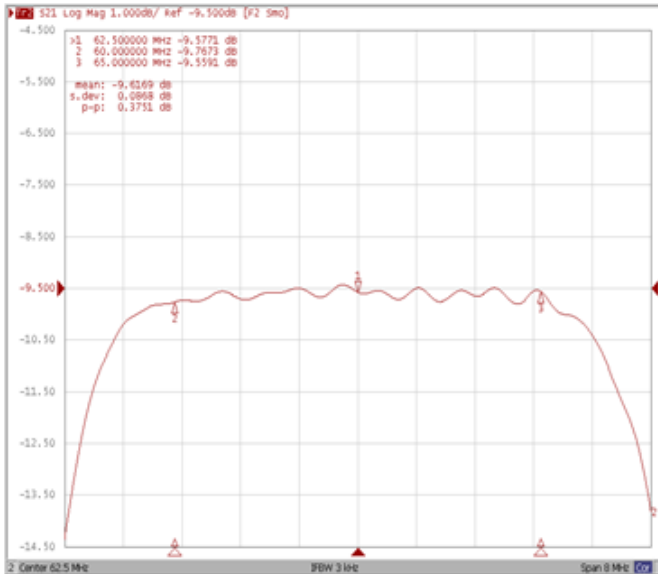

Group Delay Variation Fo±2.40MHz

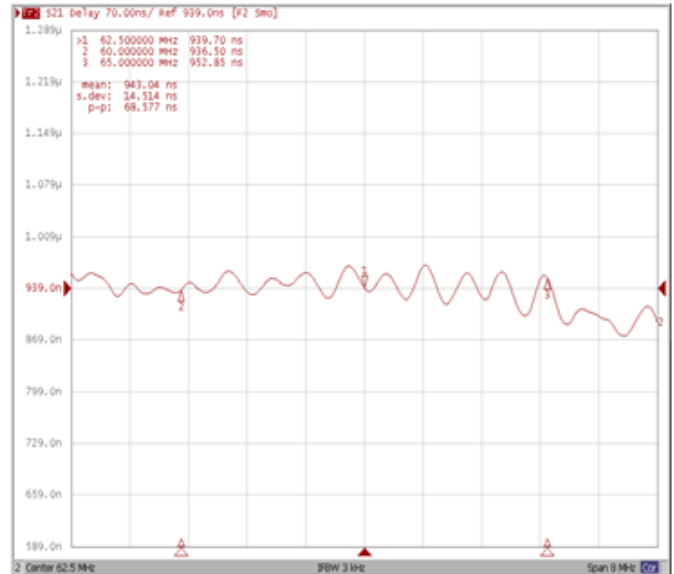

Smith Chart

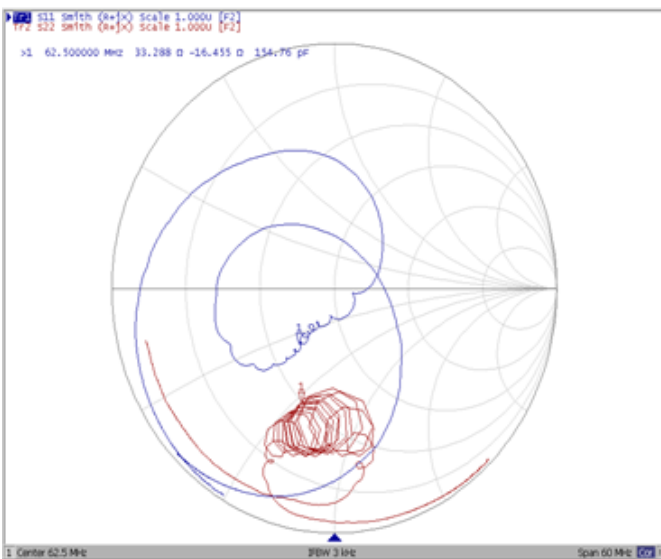

SWR

