

- Wireless, RF SAW Filter
- Revision 0: February 2012


Electrical Characteristics

MAXIMUM RATING				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	20
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	M			
Length x Width	mm ²	-	3.0 x 3.0	-
Height	mm	-	-	1.3

ELECTRICAL SPECIFICATION				
PARAMETERS DESCRIPTION	UNIT	MINIMUM	TYPICAL	MAXIMUM
Center Frequency (Fo)	MHz	-	2280.0	-
Insertion Loss within 2275.0 ~ 2285.0 MHz	dB	-	1.2	3.0
Amplitude Ripple within 2275.0 ~ 2285.0 MHz	dB _{p-p}	-	0.1	1.0
Attenuation:				
1930.0 ~ 2170.0 MHz	dB	35	45	-
2300.0 ~ 2350.0 MHz	dB	1	1.6	-
2350.0 ~ 2500.0 MHz	dB	40	52	-
VSWR within 2275.0 ~ 2285.0 MHz	-	-	1.2	2.0

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below).


Package Dimensions

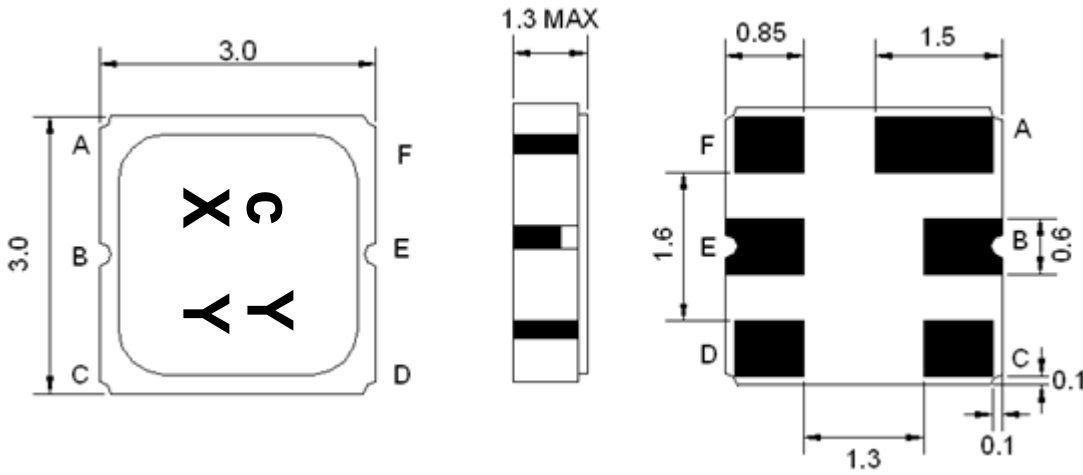

Marking Descriptions	
c	Wireless Application
Y	Series Number
X	Date Code (Year)
Y	Date Code (Month)


Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In

Testing Environment

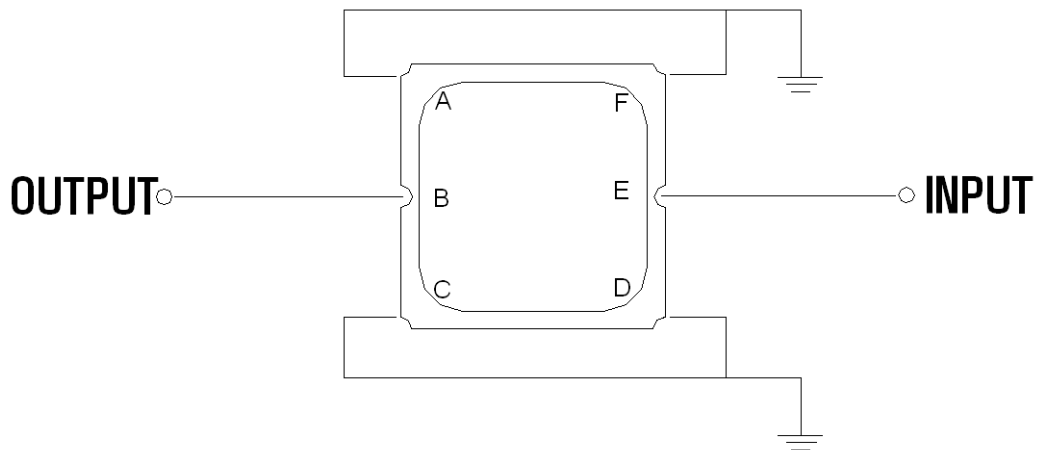


Source & Load Impedance: 50 Ω

Frequency Characteristics

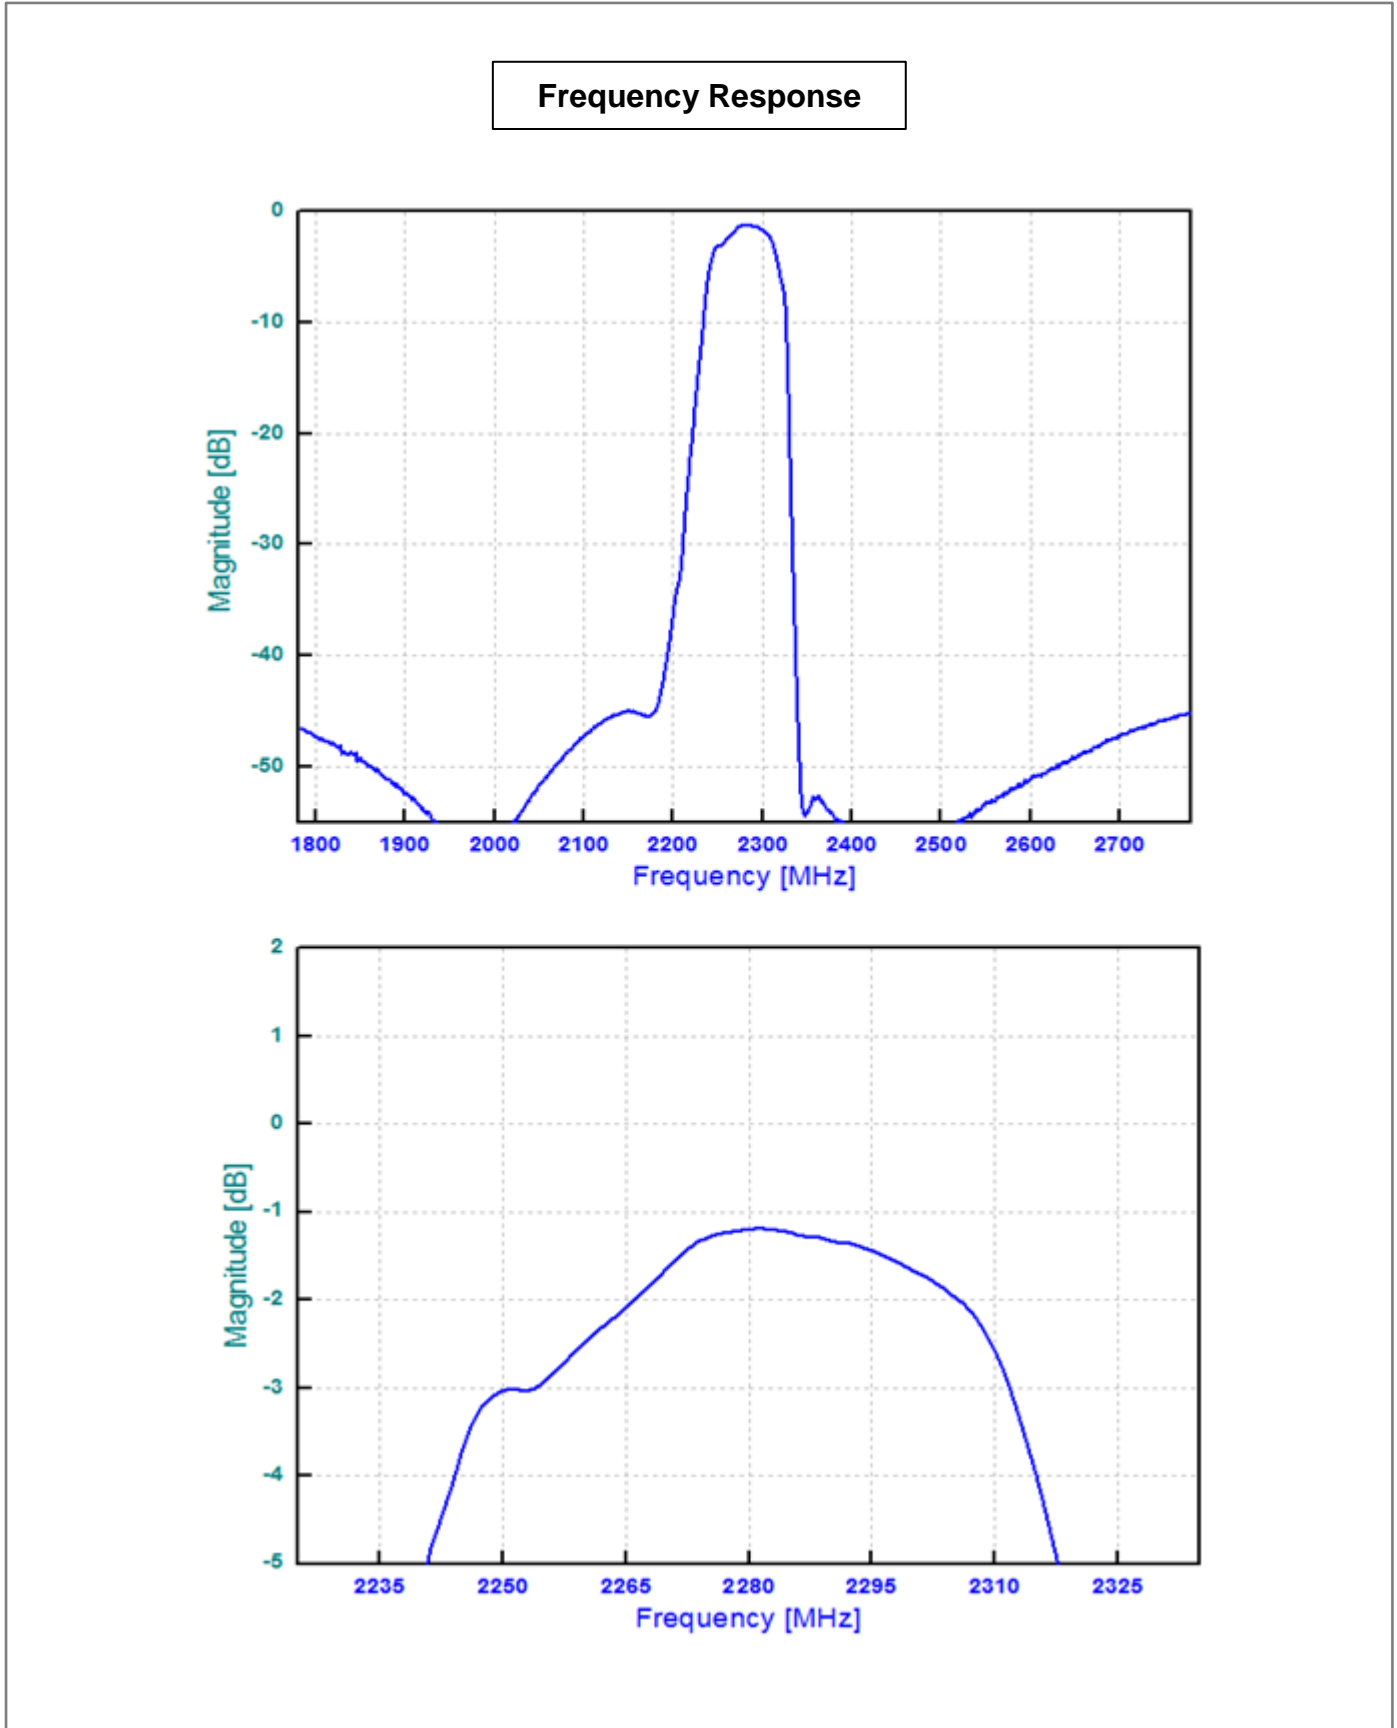

VSWR

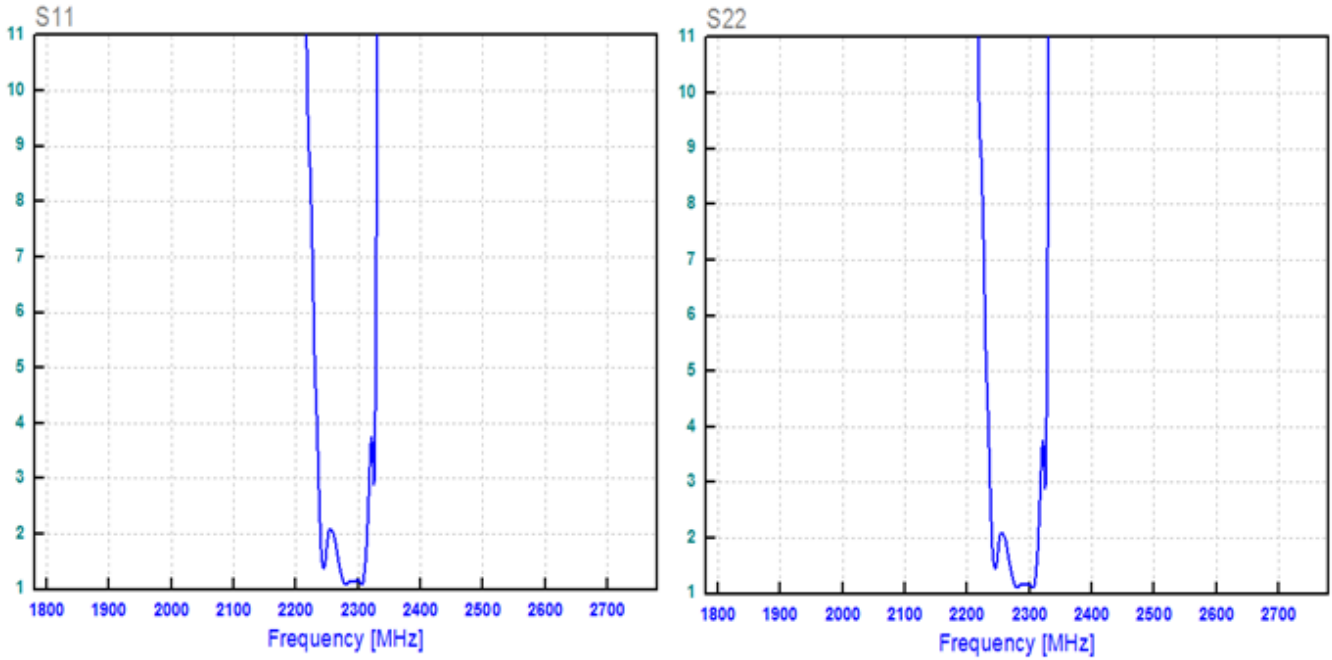

Smith Chart

